

PetroChemical Standards

■ This selection of Biofuel reference standards. Includes FAMES & FAEEs from most popular biomasses, sulfurs, physical standards, wear metals, and free & total glycerin.

■ Reference standards to meet the most common UOP LLC (a Honeywell company) methods.

■ Reference standards for over 100 ASTM methods plus cross references to ISO, DIN, IP, JIS & AFNOR methods see page 273.

Petrochemical	269-344
ASTM Listing and Cross References	269-270
Quality Control	271-272
Physical Properties	274-275
Sulfur Standards	276-279
PIANO	280-281
Detailed Hydrocarbon Analysis and SIM DIS	282-283
ASTM Reference Standards (other)	283-312
Diisocyanates	307
UOP Standards	313
Miscellaneous - Skinner List, Fire Debris	314
BioFuels	315-317
TPH & Fuels & Hydrocarbons	318-321
Brownfield Regulation and ISO/DIS 9337	321
LUFT/LUST (UST) Methods - State Specific, GRH, DRH - TPH	322-336
Oil, Grease & TPH - EPA Methods 1664, 413.2/418.1 and 8440	336
Wear Metals (Organometallics)	337-344
Lubricating Oils	342-344



ASTM Table of Contents

ASTM Methods

ASTM #	Method Description	Page	ASTM #	Method Description	Page
	Cross Reference Tables (ASTM,IP,ISO,DIN,JIS,AFNOR)	273	D5191	Vapor Pressure Standards	289, 292
D56	Flash Point by TAG Closed Cup	274	D5307	Boiling Range Distribution of Crude Petroleum by GC	289
D86	Synthetic Distillation Standard	274	D5441	MtBE Analysis by GC	290
D92	Flash Point Standards (COC)	274	D5442	Petroleum Waxes by GC	291
D93	Flash Point Standards (PMCC)	274	D5443	PNA Analysis by Multidimensional GC	291
D445	Viscosity Calibration Standard	274	D5453	Sulfur by Ultra Violet Fluorescence	291, 312
D611	Aniline Point Standard	274	D5480	Engine Oil Volatility by GC	292
D1015	Freezing Point Standards	274	D5482	Vapor Pressure Standards	289, 292
D1319	Olefin Analysis by FIA	275	D5501	Ethanol Analysis by GC	292
D1744	Water in Liquid Petroleum Products	275, 309, 312	D5580	Aromatics by GC	293
D2386	Freezing Point Calibration Standards	275	D5599	Oxygenates by OFID	294-296
D2500	Cloud Point Calibration Standards	275	D5600	Trace Metals by ICP	296, 392
D2622	Sulfur by XRF	276-279	D5622	Oxygenates by Reductive Pyrolysis	297
D2789	PIANO, PONA, PNA by GC	280-281	D5623	Sulfur Compounds by Sulfur Selective Detection	297
	Hydrocarbon Analysis in Gasoline by GC/MS	282	D5708	Trace Metals by ICP	297, 401
D2887	Boiling Range by GC	282	D5762	Nitrogen by Chemiluminescence	297, 401
	Simulated Distillation (SIM DIS) by GC	283	D5769	Aromatics by GC/MS	299-306
D3120	Sulfur by Oxidative Microcoulometry	283	D5771	Cloud Point of Petro Products	275, 306
D3230	Salts in Crude Oil	283, 405	D5772	Cloud Point of Petro Products (Linear Cooling Rate)	275, 306
D3231	Phosphorus in Gasoline	283, 350	D5773	Cloud Point of Petro Products (Constant Cooling Rate)	275, 306
D3237	Lead in Gasoline by AA	283, 405	D5836	Diisocyanates	307
D3246	Sulfur in Petroleum Gas by Oxidative Microcoulometry	276-279, 283	D5863	Trace Metals by AA	274-275
D3340	Li & Na in Lubricating Greases by Flame Photometer	283, 355	D5901	Freezing Point Aviation Fuels (Auto Optical Method)	274-275
D3524	Diesel Fuel Analysis by GC	283	D5972	Freezing Point Aviation Fuels	274-275
D3605	Trace Metal in Gas Turbine Fuels by AA	283, 405	D5986	Oxygenates and Aromatics by GC/FTIR	307
D3610	Total Co Analysis by Potentiometric Titration	284	D6042	Plastic Packaging Testing	97-102
D3710	Boiling Range by GC	285	D6160	PCBs by GC	308
D3798	p-Xylene Analysis by GC	285	D6258	Solvent Red 164 Dye Concentration in Diesel Fuels	308
D3831	Manganese in Gasoline by AA	285, 405	D6293	Oxygenates (O-PONA) in Engine Fuels by GC	308
D4059	PCB Analysis by GC	285	D6296	Total Olefins in Spark Ignition Engine Fuels by GC	309
D4110	Ion Chrom	358-361	D6304	Water in Liquid Petro Products	275, 312
D4291	Ethylene Glycol by GC	286	D6334	Sulfur in Gasoline by Wavelength WD-XRF	276-279
D4294	Sulfur by ED-XRF	276-279	D6352	Boiling Range Distribution of Petroleum	309
D4377	Water in Liquid Petroleum Products	275, 286, 312	D6378	Vapor Pressure	284, 292, 310
D4420	Aromatics in Gasoline by GC	286	D6379	Aromatic Hydrocarbon by HPLC	310
D4628	Wear Metals in Lube Oil	286, 402	D6417	Engine Oil by GC	309, 310
D4629	Nitrogen by Chemiluminescence	286	D6428	Sulfur by ECD	310
D4815	Oxygenates in Gasoline by GC	287	D6443	Metals in Oil	403-404
D4927	Wear Metals and Additives by WD-XRF	287	D6445	Sulfur in Gasoline by ED-XRF	276-279
D4928	Water in Liquid Petroleum Products	275, 286, 312	D6481	Lube Oils by ED-XRF	402-403
D4929	Chlorine in Crude Oil by Microcoulometry	287	D6550	Olefin Content of Gasoline by SFC	310
D4951	Wear Metals and Additives by ICP	287, 403	D6584	(EN14105) Free and Total Glycerin	311
D5056	Trace Metals in Petroleum Coke by AA	354-356	D6591	(IP 391) Aromatic Hydrocarbon by HPLC	311
D5059	Lead in Gasoline by X-Ray Spectroscopy	288	D6751	Sulfur in Biodiesel	312
D5134	Petroleum Naphthas through n-Nonane by GC	288	D7065	Nonylphenol and Octylphenol	267
D5184	Al and Si by ICP-AES & AA	392	D7485	Nonylphenol and Octylphenol	267
D5185	Wear Metals and Additives by ICP	288, 397, 402-404	E1064	Water in Petroleum	275
D5186	Aromatics by SFC	288	E1387	Fire Debris Analysis	314
D5188	Vapor - Liquid Ratio Temperature	289	E1618	Fire Debris Analysis	314

Sulfur Standards Group

D2622	Sulfur by XRF
D3120	Sulfur by Oxidative Microcoulometry
D3246	Sulfur in Petro Gas by Oxidative Microcoulometry
D4294	Sulfur by ED-XRF
D5453	Sulfur by Ultra Violet Fluorescence
D5623	Sulfur Compounds by Sulfur Selective Detection
D6334	Sulfur in Gasoline by Wavelength WD-XRF
D6445	Sulfur in Gasoline by ED-XRF



Additional Methods

Motor Oil Standards	310
Chlorine in Lube Oil	287
Method 1664, Oil, Grease and TPH	336
Method 413.2, 418.1 and TPH Analysis	336
Method 8440 TPH Analysis	249
Method 1004 Alcohol Oxidation Products in Engine Exhaust	326

Wear Metals Group

D3605	Trace Metals in Gas Turbine Fuel by AA
D4628	Wear Metals in Lube Oil
D4927	Wear Metals and Additives by WDXRF
D4951	Wear Metals and Additives by ICP
D5185	Wear Metals and Additives by ICP
D5708	Trace Metals by ICP
D5863	Trace Metals by AA
D6443	Metals in Oil
D6481	Lube Oils by ED-XRF

Shipping Symbols

- ▲ Hazardous fee required.
- ▼ Hazardous fee not required
- * A ColdPAK is required
-  Can not be shipped by Air
-  Reformulated to ship by Air

AccuPetroCheck and AccuPetroTest Real World Gasoline QC Standards

In cooperation with ASTM D02 subcommittee 3 and 4, AccuStandard ampulled 21 Real World gasoline reference fuels. Consensus Values have been determined for these reference fuels by various ASTM Round Robins to provide Petrochemical Laboratories with a source of well characterized gasoline standards for use in QA/QC applications and as Single Blind test samples over an extended period of time. As new ASTM D02.03 and D02.04 Test methods are promulgated they require mandatory Quality Control testing of real world samples. AccuStandard's PetroTest & PetroCheck standards are being successfully used to achieve these new Quality Control requirements.

AccuPetroTest

Sulfur in Diesel Fuel QC Standard

SBPT-SDF-VAP \$ 25 / 2 x 15 mL

Parameter	Approx. Range
Sulfur	20 - 11000 µg/g

See ASTM Methods D2622, D3120, D3246, D4294, D5453 for Sulfur Calibration Standards

Sulfur in White Mineral Oil QC Standard

SBPT-SWMO-VAP \$ 25 / 2 x 15 mL

Parameter	Approx. Range
Sulfur	20 - 11000 µg/g

See ASTM Methods D2622, D3120, D3246, D4294, D5453 for Sulfur Calibration Standards

Sulfur Single Blind AccuPetroTest Alternative Matrices Standards

We have manufactured a number of Diesel and White Mineral Oil QC products containing a gravimetrically prepared amount of Sulfur. Use of these alternative matrix materials can provide further evaluation of the QA/QC process in the laboratory. Two samples will be sent for the test parameter and a separate sealed envelope containing the gravimetrically prepared sulfur values is also provided. The second sample is for repeatability testing or for use as a future QA/QC reference.

AccuPetroTest Gasoline

Low Sulfur QC Sample

SBPT-LSGAS-VAP \$ 25 / 2 x 15 mL

Parameter	Method	Approx. Range
Sulfur	D5453	0 - 50 µg/g

Olefin QC Sample

SBPT-OLEFINSFC-VAP \$ 25 / 2 x 15 mL

Parameter	Method	Approx. Range
Total Olefins	D6550	1 - 40 Vol.%

AccuPetroTest Gasoline

Comprehensive Single Blind Gasoline QC Sample

SBPT-COMP-VAP \$ 50 / 2 x 15 mL

Parameter	Method	Approx. Range	Conc.
Total Aromatics	D1319	8 - 60	Vol.%
Total Olefins	D1319	1 - 40	Vol.%
Total Saturates	D1319	30 - 80	Vol.%
Sulfur	D2622	0.0001 - 0.0930	Wt.%
Sulfur	D4294	0.0016 - 0.0930	Wt.%
Sulfur	D5453	0.5 - 500	µg/g
Sulfur	D6344	1.0 - 1000	µg/g
Benzene	D5769	0.1 - 2.0	Vol.%
Toluene	D5769	1.0 - 15	Vol.%
Total Aromatics	D5769	8 - 60	Vol.%
Benzene	D5769	0.1 - 2.0	Vol.%
Total Olefins	D6550	1 - 40	Vol.%

Technical Note

This comprehensive single blind gasoline QC sample tests for more parameters from a single sample. The actual gasoline sample will have consensus values listed on the datasheet that fall within the range listed for each parameter.

Quality Control Standards continue on next page

AccuPetroTest Gasoline QC

Olefins QC Sample

SBPT-OLEFIN-VAP \$ 25 / 2 x 15 mL

Parameter	Method	Approx. Range
Total Aromatics	D1319	8-60 Vol.%
Total Olefins	D1319	1 - 40 Vol.%
Total Saturates	D1319	30-80 Vol. %

See ASTM Method D1319 for Sulfur Calibration Standards

Aromatics QC Sample

SBPT-AROM-VAP \$ 25 / 2 x 15 mL

Parameter	Method	Approx. Range
Total Aromatics	D5769	8 - 60 Vol.%

See ASTM Methods, D3606, D5580, D5769 for Benzene Calibration Standards

Sulfur QC Sample

SBPT-SGAS-VAP \$ 25 / 2 x 15 mL

Parameter	Method	Approx. Range
Sulfur	D2622	0.0001 - 0.0930 Wt.%
Sulfur	D4294	0.0016 - 0.0930 Wt.%
Sulfur	D5453	4.0 - 500 µg/g
Sulfur	D6344	1.0 - 1000 µg/g

See ASTM Methods D2622, D3120, D3246, D4294, D5453 for Sulfur Calibration Standards

Benzene/Toluene QC Sample

SBPT-BENZ-VAP \$ 25 / 2 x 15 mL

Parameter	Method	Approx. Range
Benzene	D5769	0.1 - 2.0 Vol.%
Toluene	D5769	1.0 - 15 Vol.%

See ASTM Methods, D3606, D5580, D5769 for Benzene Calibration Standards

Technical Note

AccuPetroTest Single Blind Standards
Petrochemical laboratories looking to test the performance of the laboratory for a specific parameter can order the Single Blind **AccuPetroTest** sample for the parameter of interest. Two real world gasoline samples will be sent for the test parameter requested and a separate sealed envelope containing the determined Consensus Value is also provided. The second sample is for repeatability testing or as a future QA/QC reference.

Conducting a Petrochemical Round Robin for a new ASTM method?

Select AccuStandard to prepare the necessary samples for the Round Robin study

AccuStandard has packaged for ASTM committee D02 various select groups of gasoline fuels and hydrocarbon products for use in various Round Robin studies.

Large Sample Offering

AccuStandard was selected by ASTM committee D02 to fill, seal and package an initial set of 21 different types of Round Robin Gasolines. Each gasoline was selected due to its unique properties. These unique properties will be determined by various ASTM methods under evaluation through ASTM subcommittees. AccuStandard has expanded this offering with additional materials blended for other ASTM Round Robins.

Flexibility

Use the original 21 gasoline samples to conduct a Round Robin and we can label the samples appropriately to protect the integrity of the Round Robin. In addition, we can easily add additional samples to your specific Round Robin study to expand the scope of the method for different matrices, concentrations or instrument types.

Petro PT Samples

Oxygenate PT Sample

With MtBE contamination problems in drinking water, numerous states are requiring certification for Oxygenate monitoring. Join AccuStandard's next study for Oxygenate analysis. Our timely PT schedule easily allows your lab to be proactive in new regulatory requirements. The analytes in the standard and the PT sample have been drawn from the California list of known prevalent oxygenates in gasoline. These Oxygenate PT samples and standards allow your Lab to:

- Expand testing capabilities
- Generate new testing revenue
- Eliminate standard preparation
- Easily combine with other Volatile standards

SUFFIX KEY

AT = Pre-Test
AV = Values Included

WS-PT Oxygenates

OPE-OXY-001-AT \$ 47 / 2 mL

OPE-OXY-001-AV \$ 47 / 2 mL

Sample conc. after prep 5.0-50 µg/L 4 comps.

ETBE MTBE
Diisopropylether TAME

Technical Note

This PT sample can be used by gravimetric oil and grease methods. In addition, it can also be used for TPH analysis by gravimetric methods including the EPA method 1664. The sample contains real world material commonly found at petroleum containment sites.

WP-PT Oil, Grease & TPH

IPE-OILG-001-AT

\$ 32 / 5 mL

IPE-OILG-001-AV

\$ 32 / 5 mL

Sample conc. after prep

2 comps.

Analyte List	Sample range
Total Oil & Grease	5-100 mg/L
TPH	5-100 mg/L

Suggested Calibration Standards

Oxygenate Gasoline Additive Standards

OGAD-001 \$ 30 / 1 x 1 mL

OGAD-001-PAK **SAVE 20%** \$ 120 / 5 x 1 mL

At stated conc. in MeOH 5 comps

MtBE (2000 µg/mL) TAME (2000 µg/mL)
ETBE (2000 µg/mL) t-Butanol (10000 µg/mL)
Isopropyl ether (2000 µg/mL)

OGAD-002 \$ 30 / 1 x 1 mL

At stated conc. in MeOH 5 comps

t-Butanol (10000 µg/mL) TAME (2000 µg/mL)
ETBE (2000 µg/mL) TAE (2000 µg/mL)
Isopropyl ether (2000 µg/mL)

Suggested Calibration Standard

Oil and Grease

WC-OILG-10X-1 \$ 45 / 100 mL

1000 µg/mL Total Oil and Grease in n-Propanol 2 comps.

Contains 500 µg/mL vegetable oil and 500 µg/mL of petroleum oil.

Shake well before use.

ASTM Committee D02 has jurisdiction over 580 published methods pertaining to petroleum products and lubricants. AccuStandard is a member of this technical committee, as well as ASTM Committee D16 on Aromatic Hydrocarbons. Working with fellow committee members has given us the opportunity to formulate products to meet the requirements of many of these methods.

In addition, AccuStandard can prepare, package and ship products for both ASTM PTP's (proficiency testing programs) and round robin studies. Please contact our Technical Service Department for more information.

Use this Cross-reference Table to Match other Methods for known Petrochemical analysis.

ANALYSIS	ASTM	IP	ISO	DIN	JIS	AFNOR
Tag Flash Point	D56			51411	K 2580	M07-003
Distillation	D86	123	3405	51751	K 2254	M07-002
COC Flash Point	D92	36	2592	51376	K 2265	T60-118
PMCC Flash Point	D93	34	2719	51758	K 2265	M07-019
Kinematic Viscosity	D445	71-1	3104	51562	K 2283	T60-100
Aniline Point	D611	2	2977	51775		M07-021
Hydrocarbon Types by FID	D1319	156	3837	51791	K 2536	M07-024
Water (Karl Fischer)	D1744		6296			T60-154
Freezing Point	D2386	16	3013	51421	K 2276	M07-048
Cloud Point	D2500	219	3015	51597	K 2269	T60-105
Sulfur by XRF	D2622			51400T6	K 2541	
Boiling Range By GC	D2887		3924			
Sulfur by Oxidative Microcoulometry	D3120		16591			
Lead by AAS	D3237	428				
Sulfur by Oxidative Microcoulometry	D3246	373				M07-052
Metals by AA	D3605	413	8691	51790T3		
Benzene by GC	D3606	425				
Sulfur by ED-XRF	D4294	336	8754			M07-053
Water (Karl Fischer)	D4377	356	10336			
Metals by AA	D4628	308		51391T1		
Nitrogen by Chemiluminescence Detection	D4629	379				M07-058
Metals by WD-XRF	D4927	407		51391T2		
Water (Karl Fischer)	D4928	386	10337			
Lead in Gas By X-Ray	D5059	228				
Vapor Pressure	D5191	394				M07-079
Oxygenates	D5599	408				
Cloud Point	D5771	444				
Cloud Point	D5772	445				
Cloud Point	D5773	446				
Freezing Point	D5901	434				
Auto-Freeze Point	D5972	435				
Hydrocarbons Automatic	D6379	436				
Hydrocarbons Automatic	D6591	391				
Metals			14597			

This is a partial list of Standards available for ASTM Methods.

Tables Generated from

- (a) R.A. Nadkarni, "Guide to ASTM Test Methods for the Analysis of Petroleum Products and Lubricants," Manual 44 (200), ASTM West Conshohocken, PA
- (b) Annual Book of ASTM Standards 2000, Volumes 05.01 to 05.05

MEMBER



On site Viscosity testing



Vacuum Distillation apparatus for Testing Biodiesels Standards



ASTM Physical Properties

ASTM D56, D92, D93 Flash Point Standards

The reference material is a stable, pure hydrocarbon with a method specific flash point determined by using the ASTM Method # referenced.

ASTM #	Nominal Flash Point	Cat. No.	Price / Unit
PMCC D93	60 °C	ASTM-P-132-01	\$ 110 / 250 mL
PMCC D93	93 °C	ASTM-P-132-02	110 / 250 mL
COC D92	200 °C	ASTM-P-132-03	110 / 250 mL
COC D92	230 °C	ASTM-P-132-04	110 / 250 mL
PMCC D93	65 °C	ASTM-P-133-01	\$ 175 / 250 mL
PMCC D93	134 °C	ASTM-P-133-02	130 / 250 mL
COC D92	138 °C	ASTM-P-133-03	130 / 250 mL
TCC D56	67 °C	ASTM-P-133-04	175 / 250 mL

Note: nominal 250 mL fill

ASTM D86 Distillation Standards

The automatic distillation apparatus duplicates the distillation conditions of the manual method. The increased reliance on electronic control requires an independent standard to verify that the apparatus is performing correctly. This synthetic blend of hydrocarbons boil in the temperature range specified in ASTM D86 distillation Groups 1 and 2, and a fuel oil that meets the group 4 criteria.

The Group 1 and 2 standards cover the boiling range 129-368°F (54-187°C). The Group 4 standard covers the range from 410-670°F (210-355°C).

Group	Description	Cat. No.	Price / Unit
1, 2	Synthetic Distillation Standard	ASTM-P-126-01 ▲	\$ 160 / 500 mL
		ASTM-P-126-SET ▲	290 / 2 x 500 mL
4	Distillation Standard	ASTM-P-127-01 ▲	160 / 250 mL
		ASTM-P-127-02 ▲	290 / 500 mL

Note: nominal 500 mL fill, or 250 mL fill

ASTM D445 Viscosity Calibration Standards

Viscosity @ 40°C	Cat. No.	Price / Unit
4 Cst	ASTM-P-128-01	\$ 60 / 500 mL
7 Cst	ASTM-P-128-02	60 / 500 mL
19 Cst	ASTM-P-128-03	60 / 500 mL
61 Cst	ASTM-P-128-04	60 / 500 mL
180 Cst	ASTM-P-128-05	60 / 500 mL
520 Cst	ASTM-P-128-06	60 / 500 mL

Note: nominal 500 mL fill

ASTM D611 Aniline Point Standards

The accuracy of automated aniline point apparatus can be verified using a range of standards whose aniline points are determined using ASTM D611 (Method A) and ASTM D611 (Method E). Standards are packaged in 20 mL ampules in an inert atmosphere.

Aniline Point Verification Method 611(A)

Set include 5 Standards listed below

Nominal Aniline Point	Cat. No.	Price / Unit
0°C	D-611-SET	\$ 90 / 5 x 20 mL
30°C	D-611-01	20 mL
55°C	D-611-02	20 mL
68°C	D-611-03	20 mL
94°C	D-611-04	20 mL
	D-611-05	20 mL

Aniline Point Verification Method 611(E)

Set include 3 Standards listed below

Nominal Aniline Point	Cat. No.	Price / Unit
43 °C	D-611E-SET	\$ 90 / 3 x 20 mL
62 °C	D-611E-01	20 mL
77 °C	D-611E-02	20 mL
	D-611E-03	20 mL
Pure Aniline	ASTM-P-134-PAK	\$ 30 / 5 x 15 mL

Technical Note

For routine purposes pure Aniline is packaged in ampules under dry nitrogen. This minimizes the risk of oxidation.

ASTM D1015 Freezing Points of High Purity Hydrocarbons

Nominal Freezing Point	Cat. No.	Price / Unit
- 50 °C	ASTM-P-129-01	\$ 110 / 250 mL
- 45 °C	ASTM-P-129-02	110 / 250 mL

Note: nominal 250 mL fill

▲ Hazardous fee required.

ASTM D1319 Calibration Standards by Fluorescent Indicator Adsorption FIA

Olefin FIA Calibration Curve

FIA-CAL-SET

\$ 350 / Set of 7 x 1 mL

	Std. 1	Std. 2	Std. 3	Std. 4	Std. 5	Std. 6	Std. 7
Target Vol. %	Vol. %	Vol. %	Vol. %	Vol. %	Vol. %	Vol. %	Vol. %
Total Olefins	2.0	4.0	5.0	6.0	8.0	10.0	12.0
Total Paraffins	57.0	55.0	52.0	51.0	45.0	45.0	40.0
Total Aromatics	23.0	24.0	25.0	26.0	29.0	28.0	30.0
Total Oxygenate	18.0	17.0	18.0	17.0	18.0	17.0	18.0

	Cat. No.	Price / 1 mL
Standard 1	FIA-CAL-01	\$ 60
Standard 2	FIA-CAL-02	60
Standard 3	FIA-CAL-03	60
Standard 4	FIA-CAL-04	60
Standard 5	FIA-CAL-05	60
Standard 6	FIA-CAL-06	60
Standard 7	FIA-CAL-07	60

FIA Olefin Standard

FIA-OLE

FIA-OLE-5ML

\$ 45 / 1 x 1 mL

\$ 135 / 1 x 5 mL

D1319
Meets
EPA Guidelines
for RFG
Analysis

	Vol. %	Vol. %
1-Pentene	33.3	1-Heptene 33.3
2,3-Dimethyl-2-butene	33.3	

Technical Note

These standards have been prepared for the determination of aromatics, olefins, oxygenates and saturates in petroleum fractions by Fluorescent Indicator Adsorption (FIA) IP designation 156/95.

The certificate for the FIA calibration curve lists both the volume percents for the hydrocarbon types and the individual volume percents for each analyte in the functional group.

The weight fraction for each hydrocarbon type and individual analyte is also listed on the certificate.

FIA Paraffin Standard

FIA-PAR

\$ 35 / 1 x 1 mL

FIA-PAR-5ML

\$ 115 / 1 x 5 mL

8 comps.

	Vol. %		Vol. %
<i>n</i> -Pentane	8	2,3-Dimethylpentane	14
<i>n</i> -Hexane	9	Isooctane	16
Cyclohexane	15	<i>n</i> -Octane	14
<i>n</i> -Heptane	14	<i>n</i> -Decane	7

FIA Aromatic Standard

FIA-ARO

\$ 35 / 1 x 1 mL

FIA-ARO-5ML

\$ 115 / 1 x 5 mL

10 comps.

	Vol. %		Vol. %
Benzene	4	<i>m</i> -Xylene	16
Toluene	32	1,2,4-Trimethylbenzene	8
Ethylbenzene	8	1,3,5-Trimethylbenzene	8
<i>p</i> -Xylene	8	1,2,4,5-Tetramethylbenzene	4
<i>o</i> -Xylene	8	Naphthalene	4

ASTM D1744, E1064, D4377 Water in Liquid Petroleum Products by Karl Fischer D4928, D6304

Standards are available for coulometric Karl Fischer titrations and are packaged in 2 mL, 5 mL, and 20 mL ampoules in sets of 5 and 10. The following concentrations are available:

Description	Cat. No.	Price / Unit
Water content 40 µg/g	KF-0.4X-5ML-VAP	\$ 40 / 10 x 5 mL
Water content 60 µg/g	KF-0.6X-5ML-VAP	\$ 65 / 10 x 5 mL
Water content 100 µg/g	KF-1X-2ML-VAP	40 / 10 x 2 mL
	KF-1X-5ML-VAP	45 / 10 x 5 mL
	KF-1X-20ML-PAK	50 / 5 x 20 mL
Water content 1000 µg/g	KF-10X-2ML-VAP	40 / 10 x 2 mL
	KF-10X-5ML-VAP	45 / 10 x 5 mL
	KF-10X-20ML-PAK	50 / 5 x 20 mL
Water content 5000 µg/g	KF-50X-2ML-VAP	40 / 10 x 2 mL
	KF-50X-5ML-VAP	45 / 10 x 5 mL
	KF-50X-20ML-PAK	50 / 5 x 20 mL

Value Added Paks (Cat. No.'s ending in -VAP) provide multiple single units packaged together for both greater stability and cost savings.

Value Added PAK

Packaged in ready to use quantities.



Karl Fischer titrator

ASTM D2386 Freezing Points Calibration Standards

Nominal Freezing Point	Cat. No.	Price / Unit
- 50 °C	ASTM-P-129-01 ▲	\$ 110 / 250 mL
- 45 °C	ASTM-P-129-02 ▲	110 / 250 mL

ASTM D2500 Cloud Point Calibration Standards

Cloud Point, Approx. Value	Cat. No.	Price / Unit
+ 5 °C	ASTM-P-131-01 ▲	\$ 110 / 250 mL
- 2 °C	ASTM-P-131-02 ▲	110 / 250 mL
- 10 °C	ASTM-P-131-03 ▲	110 / 250 mL
- 15 °C	ASTM-P-131-04 ▲	110 / 250 mL
- 20 °C	ASTM-P-131-05 ▲	110 / 250 mL

▲ Hazardous fee required.

AccuStandard stands for accuracy in Cloud Points.





D2622, D3120, D3246, D4294, D5453, D6334, D6445 & Proposed ASTM Sulfur Methods

AccuStandard offers the Petroleum Industry the most complete line of calibration standards designed for today's test methods for sulfur analysis. These standards are designed specifically for the analysis of sulfur in a wide variety of matrices such as #2 diesel fuel, white mineral oil, kerosene, gasoline, crude oil and residual oil.

Traceability, Quality and Certification

All sulfur standards are manufactured from the highest quality raw materials, including well characterized starting materials and the lowest sulfur matrices available. Most standards are manufactured on a weight/weight basis using balances that are calibrated and verified daily against reference mass standards directly traceable to NIST. The concentration of these working level Sulfur standards have established traceability links to NIST SRM's where available.

Packaging

Since applicable concentration ranges will vary based on the instrumentation used and the nature of the sample the standards can be ordered as complete sets or individual bottles.

Sulfur Standards for ASTM D2622, D3120, D3246, D4294, D5453, D6334, D6445 & Proposed ASTM Sulfur Methods

Sulfur in Heavy Weight Mineral Oil (75 cSt)

Ready-to-Use

Concentration		100 mL		PAK 5 x 20 mL	
µg/g	Wt. %	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Blank	0.000	SWMO-BL-100ML	SWMO-BL-20ML-PAK		
100	0.010	SWMO-1X-100ML	SWMO-1X-20ML-PAK		
200	0.020	SWMO-2X-100ML	SWMO-2X-20ML-PAK		
300	0.030	SWMO-3X-100ML	SWMO-3X-20ML-PAK		
400	0.040	SWMO-4X-100ML	SWMO-4X-20ML-PAK		
500	0.050	SWMO-5X-100ML	SWMO-5X-20ML-PAK		
750	0.075	SWMO-7.5X-100ML	SWMO-7.5X-20ML-PAK		
1,000	0.10	SWMO-10X-100ML	SWMO-10X-20ML-PAK		
1,500	0.15	SWMO-15X-100ML	SWMO-15X-20ML-PAK		
3,000	0.30	SWMO-30X-100ML	SWMO-30X-20ML-PAK		
5,000	0.50	SWMO-50X-100ML	SWMO-50X-20ML-PAK		
7,000	0.70	SWMO-70X-100ML	SWMO-70X-20ML-PAK		
10,000	1.00	SWMO-100X-100ML	SWMO-100X-20ML-PAK		
15,000	1.50	SWMO-150X-100ML	SWMO-150X-20ML-PAK		
20,000	2.00	SWMO-200X-100ML	SWMO-200X-20ML-PAK		
30,000	3.00	SWMO-300X-100ML	SWMO-300X-20ML-PAK		
40,000	4.00	SWMO-400X-100ML	SWMO-400X-20ML-PAK		
50,000	5.00	SWMO-500X-100ML	SWMO-500X-20ML-PAK		
60,000	6.00	SWMO-600X-100ML	SWMO-600X-20ML-PAK		

Set of above SWMO-CAL-100ML-SET
19 x 100 mL \$ 850

At stated concentration
5 x 20 mL \$ 60 / ea

Individual Sulfur Standards 100 mL Bottle
1 - 10 units \$ 55 ea
10+ units \$ 50 ea

Sulfur in Light Weight Mineral Oil (20 cSt)

Ready-to-Use

Concentration		100 mL		PAK 5 x 20 mL	
µg/g	Wt. %	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Blank	0.000	SWMO-LT-BL-100ML	SWMO-LT-BL-20ML-PAK		
100	0.010	SWMO-LT-1X-100ML	SWMO-LT-1X-20ML-PAK		
200	0.020	SWMO-LT-2X-100ML	SWMO-LT-2X-20ML-PAK		
300	0.030	SWMO-LT-3X-100ML	SWMO-LT-3X-20ML-PAK		
400	0.040	SWMO-LT-4X-100ML	SWMO-LT-4X-20ML-PAK		
500	0.050	SWMO-LT-5X-100ML	SWMO-LT-5X-20ML-PAK		
750	0.075	SWMO-LT-7.5X-100ML	SWMO-LT-7.5X-20ML-PAK		
1,000	0.10	SWMO-LT-10X-100ML	SWMO-LT-10X-20ML-PAK		
1,500	0.15	SWMO-LT-15X-100ML	SWMO-LT-15X-20ML-PAK		
3,000	0.30	SWMO-LT-30X-100ML	SWMO-LT-30X-20ML-PAK		
5,000	0.50	SWMO-LT-50X-100ML	SWMO-LT-50X-20ML-PAK		
7,000	0.70	SWMO-LT-70X-100ML	SWMO-LT-70X-20ML-PAK		
10,000	1.00	SWMO-LT-100X-100ML	SWMO-LT-100X-20ML-PAK		
15,000	1.50	SWMO-LT-150X-100ML	SWMO-LT-150X-20ML-PAK		
20,000	2.00	SWMO-LT-200X-100ML	SWMO-LT-200X-20ML-PAK		
30,000	3.00	SWMO-LT-300X-100ML	SWMO-LT-300X-20ML-PAK		
40,000	4.00	SWMO-LT-400X-100ML	SWMO-LT-400X-20ML-PAK		
50,000	5.00	SWMO-LT-500X-100ML	SWMO-LT-500X-20ML-PAK		
60,000	6.00	SWMO-LT-600X-100ML	SWMO-LT-600X-20ML-PAK		

Set of above SWMO-LT-CAL-100ML-SET
19 x 100 mL \$ 850

At stated concentration
5 x 20 mL \$ 60

Individual Sulfur Standards 100 mL Bottle
1 - 10 units \$ 55 ea
10+ units \$ 50 ea

Sulfur in #2 Diesel Fuel

Ready-to-Use

Concentration		100 mL		PAK 5 x 20 mL	
µg/g	Wt. %	Cat. No.	Cat. No.	Cat. No.	Cat. No.
Blank	0.000	SDF-BL-100ML ▲	SDF-BL-20ML-PAK		
100	0.010	SDF-1X-100ML ▲	SDF-1X-20ML-PAK		
200	0.020	SDF-2X-100ML ▲	SDF-2X-20ML-PAK		
300	0.030	SDF-3X-100ML ▲	SDF-3X-20ML-PAK		
400	0.040	SDF-4X-100ML ▲	SDF-4X-20ML-PAK		
500	0.050	SDF-5X-100ML ▲	SDF-5X-20ML-PAK		
750	0.075	SDF-7.5X-100ML ▲	SDF-7.5X-20ML-PAK		
1,000	0.10	SDF-10X-100ML ▲	SDF-10X-20ML-PAK		
1,500	0.15	SDF-15X-100ML ▲	SDF-15X-20ML-PAK		
3,000	0.30	SDF-30X-100ML ▲	SDF-30X-20ML-PAK		
5,000	0.50	SDF-50X-100ML ▲	SDF-50X-20ML-PAK		
7,000	0.70	SDF-70X-100ML ▲	SDF-70X-20ML-PAK		
10,000	1.00	SDF-100X-100ML ▲	SDF-100X-20ML-PAK		
15,000	1.50	SDF-150X-100ML ▲	SDF-150X-20ML-PAK		
20,000	2.00	SDF-200X-100ML ▲	SDF-200X-20ML-PAK		
30,000	3.00	SDF-300X-100ML ▲	SDF-300X-20ML-PAK		
40,000	4.00	SDF-400X-100ML ▲	SDF-400X-20ML-PAK		
50,000	5.00	SDF-500X-100ML ▲	SDF-500X-20ML-PAK		
60,000	6.00	SDF-600X-100ML ▲	SDF-600X-20ML-PAK		

Set of above SDF-CAL-100ML-SET
19 x 100 mL \$ 850

SDF-CAL-20ML-SET
19 x (5 x 20 mL) \$ 950

Individual Sulfur Standards 100 mL Bottle
1 - 10 units \$ 55 ea
10+ units \$ 50 ea

At stated concentration
5 x 20 mL \$ 60

▲ Hazardous fee required.

Technical Note

A well-characterized di-*n*-butyl sulfide is used as the starting material in these products.

Custom Concentrations

AccuStandard can custom design a sulfur set for your specific needs. Contact our Technical Service Department for assistance or additional information.

As the matrix may contain some native sulfur, AccuStandard encourages purchasing sulfur blanks for calibration analysis

Sulfur Standards for ASTM D2622, D3120, D3246, D4294, D5453, D6334, D6445 & Proposed ASTM Sulfur Methods

Sulfur in Light Distillate Kerosene

Ready-to-Use

Concentration µg/g	Wt. %	100 mL Cat. No.	PAK 5 x 20 mL Cat. No.
Blank	0.000	SK-BL-100ML ▲	SK-BL-20ML-PAK
100	0.010	SK-1X-100ML ▲	SK-1X-20ML-PAK
300	0.030	SK-3X-100ML ▲	SK-3X-20ML-PAK
500	0.050	SK-5X-100ML ▲	SK-5X-20ML-PAK
750	0.075	SK-7.5X-100ML ▲	SK-7.5X-20ML-PAK
1,000	0.10	SK-10X-100ML ▲	SK-10X-20ML-PAK
2,000	0.20	SK-20X-100ML ▲	SK-20X-20ML-PAK
3,000	0.30	SK-30X-100ML ▲	SK-30X-20ML-PAK
4,000	0.40	SK-40X-100ML ▲	SK-40X-20ML-PAK
5,000	0.50	SK-50X-100ML ▲	SK-50X-20ML-PAK
10,000	1.00	SK-100X-100ML ▲	SK-100X-20ML-PAK
20,000	2.00	SK-200X-100ML ▲	SK-200X-20ML-PAK

Set of above SK-CAL-100ML-SET ▲
12 x 100 mL \$ 500

Individual Sulfur Standards 100 mL Bottle
1 - 10 units \$ 55 ea
10+ units \$ 50 ea

At stated conc.
5 x 20 mL \$ 60

Sulfur in Heavy Distillate Kerosene

Concentration µg/g	Wt. %	100 mL Cat. No.
Blank	0.000	SK-HD-BL-100ML ▲
100	0.010	SK-HD-1X-100ML ▲
200	0.020	SK-HD-2X-100ML ▲
300	0.030	SK-HD-3X-100ML ▲
400	0.040	SK-HD-4X-100ML ▲
500	0.050	SK-HD-5X-100ML ▲
750	0.075	SK-HD-7.5X-100ML ▲
1,000	0.10	SK-HD-10X-100ML ▲
1,500	0.15	SK-HD-15X-100ML ▲
2,000	0.20	SK-HD-20X-100ML ▲
3,000	0.30	SK-HD-30X-100ML ▲
4,000	0.40	SK-HD-40X-100ML ▲
5,000	0.50	SK-HD-50X-100ML ▲
7,000	0.70	SK-HD-70X-100ML ▲
10,000	1.00	SK-HD-100X-100ML ▲
15,000	1.50	SK-HD-150X-100ML ▲
20,000	2.00	SK-HD-200X-100ML ▲
30,000	3.00	SK-HD-300X-100ML ▲
40,000	4.00	SK-HD-400X-100ML ▲
50,000	5.00	SK-HD-500X-100ML ▲
60,000	6.00	SK-HD-600X-100ML ▲

Set of above SK-HD-CAL-100ML-SET ▲
21 x 100 mL \$ 950

Individual Sulfur Standards 100 mL Bottle
1 - 10 units \$ 55 ea
10+ units \$ 50 ea

Standards of Interest

For the mandatory real world QC samples stipulated in the Method, see page 271.

Custom Concentrations

AccuStandard can custom design a sulfur set for your specific needs. Contact our Technical Service Department for assistance or additional information.

Technical Note

A well-characterized di-*n*-butyl sulfide is used as the starting material in these products.

▲ Hazardous fee required.



Antek 900 Series Sulfur Analyzer



XOS Optical Systems, Sulfur Analyzer (Monochromatic Wavelength-Dispersive X-Ray Fluorescence Spectrometer)

As the matrix may contain some native sulfur, AccuStandard encourages purchasing sulfur blanks for calibration analysis



ASTM D2622, D4294 Sulfur Calibration

Sulfur Calibration Standards in Isooctane for Gasoline & Reformulated Gasoline Analysis

In Isooctane

Sulfur Conc.	Sulfur Wt.%	Cat. No. (100 mL)
Blank	0.0	STP-BL-100ML ▲
10 µg/g	0.001	STP-1X-100ML ▲
20 µg/g	0.002	STP-2X-100ML ▲
30 µg/g	0.003	STP-3X-100ML ▲
50 µg/g	0.005	STP-5X-100ML ▲
100 µg/g	0.010	STP-10X-100ML ▲
200 µg/g	0.020	STP-20X-100ML ▲
300 µg/g	0.030	STP-30X-100ML ▲
400 µg/g	0.040	STP-40X-100ML ▲
600 µg/g	0.060	STP-60X-100ML ▲
1000 µg/g	0.10	STP-100X-100ML ▲
2000 µg/g	0.20	STP-200X-100ML ▲
3000 µg/g	0.30	STP-300X-100ML ▲

STP-CAL-100ML-SET ▲ \$ 650 / 13 x 100 mL

In Isooctane Set of 13 individual bottles

Standards can be mixed for quantity discounts

1 to 4 units	\$ 60 each
5 to 10 units	\$ 55 each
more than 10 units	\$ 50 each

Technical Note

A well characterized di-*n*-butyl sulfide starting material is used with a low sulfur Isooctane matrix for RFG/gasoline sulfur standards.

ASTM D3120, D3246 Sulfur Calibration

Sulfur Calibration Set

D-3120-92-CAL-SET \$ 75 / 8 x 1 mL

In Isooctane

Sulfur Conc.	Sulfur Wt. %	Cat. No (1 mL)
Blank	—	D-3120-92-BL
1 µg/g	0.0001	D-3120-92-1X
3 µg/g	0.0003	D-3120-92-3X
10 µg/g	0.0010	D-3120-92-10X
30 µg/g	0.0030	D-3120-92-30X
50 µg/g	0.0050	D-3120-92-50X
75 µg/g	0.0075	D-3120-92-75X
100 µg/g	0.010	D-3120-92-100X

Technical Note

Well characterized di-*n*-butyl sulfide is used in a low sulfur Isooctane matrix for this calibration set.

ASTM D2622, D6334, D6445 Sulfur Calibration

Sulfur Calibration Standards used on XRF Energy Dispersive or Wavelength Instruments

Low Level

In Isooctane:Toluene (3:1)

Sulfur Conc.	Sulfur Wt.%	Cat. No. (100 mL)
Blank	0.0	D-2622-LL-BL-100ML ▲
5 µg/g	0.0005	D-2622-LL-5X-100ML ▲
10 µg/g	0.0010	D-2622-LL-10X-100ML ▲
30 µg/g	0.0030	D-2622-LL-30X-100ML ▲
50 µg/g	0.0050	D-2622-LL-50X-100ML ▲
75 µg/g	0.0075	D-2622-LL-75X-100ML ▲
100 µg/g	0.010	D-2622-LL-100X-100ML ▲
300 µg/g	0.030	D-2622-LL-300X-100ML ▲
500 µg/g	0.050	D-2622-LL-500X-100ML ▲
1000 µg/g	0.100	D-2622-LL-1000X-100ML ▲

D-2622-LL-CAL-100ML-SET ▲

\$ 450 / 10 x 100 mL

In Isooctane:Toluene (3:1)

Set of 10 individual bottles

Mid Level Additions

200 µg/g	0.020	D-2622-LL-200X-100ML ▲
400 µg/g	0.040	D-2622-LL-400X-100ML ▲
600 µg/g	0.060	D-2622-LL-600X-100ML ▲
700 µg/g	0.070	D-2622-LL-700X-100ML ▲
800 µg/g	0.080	D-2622-LL-800X-100ML ▲
900 µg/g	0.090	D-2622-LL-900X-100ML ▲
1100 µg/g	0.110	D-2622-LL-1100X-100ML ▲
1200 µg/g	0.120	D-2622-LL-1200X-100ML ▲

Standards can be mixed for quantity discounts

1 to 4 units	\$ 60 each
5 to 10 units	\$ 55 each
more than 10 units	\$ 50 each

Technical Note

Well characterized Thiophene & 2-Methyl thiophene are used as starting material in these products.

As the matrix may contain some native sulfur, AccuStandard encourages purchasing sulfur blanks for calibration analysis

▲ Hazardous fee required.

ASTM Methods - Sulfur in Oil

Sulfur in Crude Oil Standards

µg/g	Wt. %	Cat. No. (100 mL)
1,000	0.10	SCO-10X-100ML ▲
2,500	0.25	SCO-25X-100ML ▲
5,000	0.50	SCO-50X-100ML ▲
10,000	1.00	SCO-100X-100ML ▲
20,000	2.00	SCO-200X-100ML ▲
30,000	3.00	SCO-300X-100ML ▲
40,000	4.00	SCO-400X-100ML ▲
50,000	5.00	SCO-500X-100ML ▲

SCO-CAL-100ML-SET ▲ \$ 1160 / 8 x 100 mL
In Crude oil Set of 8 individual bottles

Individual Sulfur \$ 145 ea
100 mL Bottle

Sulfur in Residual Oil Standards

µg/g	Wt. %	Cat. No. (100 mL)	Price
3,500	0.35	SRO-35X-100ML	\$ 145
7,000	0.70	SRO-70X-100ML	145
10,000	1.00	SRO-100X-100ML	145
15,000	1.50	SRO-150X-100ML	190
20,000	2.00	SRO-200X-100ML	145
30,000	3.00	SRO-300X-100ML	145
40,000	4.00	SRO-400X-100ML	145

SRO-CAL-100ML-SET \$ 1060 / x 100 mL
In Residual oil Set of 7 individual bottles

Standards of Interest

We can provide **Ready-to-Inject** working level calibration standards to meet unique laboratory applications. Call or fax us your standard requirements.

ASTM Methods Sulfur in Aromatic Hydrocarbons

Total Sulfur in Aromatic Compounds by Hydrogenolysis & Rateometric Colorimetry

ASTM-P-0010-PAK \$ 75 / 5 x 1 mL
1000 µg/mL in Toluene

Sulfur (as Thiophene)

Trace Quantities of Sulfur in Liquid Aromatic Hydrocarbons by Oxidative Microcoulometry

ASTM-P-0020-PAK \$ 75 / 5 x 1 mL
1000 µg/mL in Xylenes

Sulfur (as Dibenzothiophene)

ASTM-SSTDA/B-SET \$ 100 / 10 x 2 mL
Set contains the following 10 standards in isooctane

Description	Cat. No. (2 mL)
Sulfur Blank	ASTM-SSTDA-BL
Sulfur @ 0.5 µg/g in Isooctane	ASTM-SSTDA-01
Sulfur @ 1.0 µg/g in Isooctane	ASTM-SSTDA-02
Sulfur @ 2.5 µg/g in Isooctane	ASTM-SSTDA-03
Sulfur @ 5.0 µg/g in Isooctane	ASTM-SSTDA-04
Sulfur Blank	ASTM-SSTDB-BL
Sulfur @ 5.0 µg/g in Isooctane	ASTM-SSTDB-04
Sulfur @ 10.0 µg/g in Isooctane	ASTM-SSTDB-05
Sulfur @ 25.0 µg/g in Isooctane	ASTM-SSTDB-06
Sulfur @ 50.0 µg/g in Isooctane	ASTM-SSTDB-07



AccuStandard is an active member in ASTM and strives to keep abreast of ASTM method revisions. If our listed formulation does not meet the most recent method revision, please contact Technical Support for an updated product.

As the matrix may contain some native sulfur, AccuStandard encourages purchasing sulfur blanks for calibration analysis



AccuStandard's Environmental Efforts

1. As part of a recent facility expansion, and in cooperation with the local utilities, AccuStandard invested almost \$100,000 on energy conservation and controls. The estimated impact on the environment is similar to that of planting 19 acres of trees.
2. Many customers avoid the environmental impact and cost of disposing of unused standards. One of the only standards manufacturers to offer this, AccuStandard's "On-Going Stability Program" allows us to extend the expiration date on a standard if our testing over time on a specific lot warrants it.
3. Many every day steps such as using recycled paper for the tens of thousands of catalogs every year, educating customers on the value of using standards as pre-made solutions rather than buying large quantities of neat.

▲ Hazardous fee required.



The **PIANO** line of quantitative and qualitative petrochemical standards for analysis of naphthas, gasolines, reformates and other complex hydrocarbons mixtures. **PIANO** analysis involves the determination of the percentage of the following five fractions Paraffins, Isoparaffins, Aromatics, Naphthenes, and Olefins. **PONA** analysis involves analyzing the naphtha sample for Paraffins, Olefins, Naphthenes, and Aromatics. If the Isoparaffins and Olefins are not present, the analysis is just for **PNA**.

The **PIANO** line of standards is used to determine quantitative and qualitative retention times and indices as well as to monitor response factors within the hydrocarbon blend. These complex mixes are prepared from materials of the highest available purity, accurate to four decimal places, and include a detailed data sheet on the formulation composition. The typical range for the analytes in each formulation has been provided for each catalog item. The exact composition on a weight % basis for each analyte has been provided on the certificate, and a disk deliverable spreadsheet is available on request.

Updated PIANO Full Analytical Data Package (FAP) includes:

- Detailed analytical conditions
- Certification of all components
- Chromatograms all products

Products are prepared and certified gravimetrically.

1. All weights are traceable through National Institute of Standards & Technology.
2. Certified Analyte Concentration = Purity x Prepared Concentration.
3. The uncertainty value is $\pm 2\%$ and is determined in accordance with the CITAC guide to Quantifying Uncertainty in Analytical Measurement and is reported as an Expanded Uncertainty ($U(C_{cd})$). Assuming a normal distribution, a coverage factor of $K=2$ (95% confidence level) is used in the calculation.

Partnering with Air Liquide to provide these materials enables AccuStandard to provide a detailed certification package to meet your needs.

ASTM PIANO

Naphthenes FAP Documentation Sample

PIANO, PONA, PNA Analysis

PIANO *n*-Paraffins Mix

ASTM-P-0031-FAP \$ 220 / 100 µL

11 paraffins listed below at varying Wt. % typically in the range from 7.0 to 11.0 Wt. %. The actual certificate will have the exact Wt. % for each analyte.

	Typ. Wt. %
<i>n</i> -Pentane	9.4375
<i>n</i> -Hexane	9.5661
<i>n</i> -Heptane	9.8048
<i>n</i> -Octane	9.5518
<i>n</i> -Nonane	9.0482
<i>n</i> -Decane	9.2517
<i>n</i> -Undecane	9.3172
<i>n</i> -Dodecane	9.1855
<i>n</i> -Tridecane	8.9332
<i>n</i> -Tetradecane	8.7989
<i>n</i> -Pentadecane	7.1057

PIANO Isoparaffins Mix

ASTM-P-0032-FAP

\$ 240 / 100 µL

35 Isoparaffins listed below at varying Wt. % typically in the range from 0.5 to 6.0 Wt. %. The actual certificate will have the exact Wt. % for each analyte.

	Typ. Wt. %		Typ. Wt. %		Typ. Wt. %
Isopentane	2.1928	2,2-Dimethylhexane	1.3061	2,3-Dimethylheptane	1.4870
2,3-Dimethylbutane	0.4466	2,5-Dimethyl hexane	3.6975	3,4-Dimethylheptane	3.7450
2-Methylpentane	3.2815	2,2,3-Trimethylpentane	1.7371	2-Methyloctane	3.7576
3-Methylpentane	5.3865	2,4-Dimethylhexane	1.6252	3-Methyloctane	5.6020
2,2-Dimethylpentane	1.7747	2,3-Dimethylhexane	1.6212	3,3-Diethylpentane	1.5755
2,4-Dimethylpentane	3.6993	2-Methylheptane	4.4073	2,2-Dimethyloctane	3.4135
2,2,3-Trimethylbutane	3.9291	4-Methylheptane	3.2015	3,3-Dimethyloctane	3.2582
3,3-Dimethylpentane	1.1848	3-Methylheptane	5.5186	2,3-Dimethyloctane	3.8842
2-Methylhexane	2.2384	3-Ethylhexane	0.6999	3-Ethyloctane	3.7482
2,3-Dimethylpentane	1.7883	3,3-Dimethylheptane	1.7011	2-Methylnonane	3.7144
3-Methylhexane	1.6708	2,5-Dimethylheptane	5.6731	3-Methylnonane	5.7687
3-Ethylpentane	0.5080	3,5-Dimethylheptane	0.7565		

PIANO Aromatics Mix

ASTM-P-0033-FAP \$ 240 / 100 µL

38 Aromatics listed below at varying Wt. % typically in the range from 0.2 to 7.0 Wt. %. The actual certificate will have the exact Wt. % for each analyte.

	Typ. Wt. %
Benzene	3.45
Toluene	4.5738
Ethylbenzene	6.7670
<i>m</i> -Xylene	2.2259
<i>p</i> -Xylene	4.4815
<i>o</i> -Xylene	2.2519
Isopropylbenzene	2.2248
<i>n</i> -Propylbenzene	4.4979
1-Methyl-3-ethylbenzene	2.2243
1-Methyl-4-ethylbenzene	2.2206
1,3,5-Trimethylbenzene	1.1076
1-Methyl-2-ethylbenzene	2.2611
1,2,4-Trimethylbenzene	2.2535
<i>tert</i> -Butylbenzene	4.5310
Isobutylbenzene	4.4216
<i>sec</i> -Butylbenzene	2.2368
1-Methyl-3-isopropylbenzene	1.1066
1-Methyl-4-isopropylbenzene	1.0668
1-Methyl-2-isopropylbenzene	1.1241
1-Methyl-3- <i>n</i> -propylbenzene	2.1135
1-Methyl-4- <i>n</i> -propylbenzene	2.2336
<i>n</i> -Butylbenzene	2.2087
1,2-Diethylbenzene	1.0947
1-Methyl-2- <i>n</i> -propylbenzene	2.2641
1,4-Dimethyl-2-ethylbenzene	2.2803
1,3-Dimethyl-5-ethylbenzene	2.2858
1,2-Dimethyl-4-ethylbenzene	2.2558
1,3-Dimethyl-2-ethylbenzene	1.1416
1,2-Dimethyl-3-ethylbenzene	2.1864
1,2,4,5-Tetramethylbenzene	0.2360
2-Methylbutylbenzene	1.1453
1- <i>tert</i> -Butyl-2-methylbenzene	0.7641
<i>n</i> -Pentylbenzene	4.4828
1- <i>tert</i> -Butyl,3,5-dimethylbenzene	2.1641
1- <i>tert</i> -Butyl-4-ethylbenzene	2.2322
1,3,5-Triethylbenzene	4.5671
1,2,4-Triethylbenzene	1.1087
<i>n</i> -Hexylbenzene	4.5029

PIANO Naphthenes Mix

ASTM-P-0034-FAP \$ 240 / 100 µL

30 Naphthenes listed below at varying Wt. % typically in the range from 0.5 to 8.0 Wt. %. The actual certificate will have the exact Wt. % for each analyte.

	Typ. Wt. %
Cyclopentane	4.9143
Methylcyclopentane	3.2829
Cyclohexane	5.3268
1,1-Dimethylcyclopentane	3.4612
<i>cis</i> -1,3-Dimethylcyclopentane	0.5963
<i>trans</i> -1,2-Dimethylcyclopentane	1.4715
<i>trans</i> -1,3-Dimethylcyclopentane	2.7531
Methylcyclohexane	5.6091
Ethylcyclopentane	3.5534
<i>ctc</i> -1,2,3-Trimethylcyclopentane	1.5859
<i>cct</i> -1,2,4-Trimethylcyclopentane	3.7208
<i>ctc</i> -1,2,4-Trimethylcyclopentane	1.6467
<i>trans</i> -1,4-Dimethylcyclohexane	3.6499
1-Ethyl-1-methylcyclopentane	1.0554
<i>trans</i> -1,2-Dimethylcyclohexane	1.6537
<i>ccc</i> -1,2,3-Trimethylcyclopentane	0.7971
Isopropylcyclopentane	3.5042
<i>cis</i> -1,2-Dimethylcyclohexane	3.7159
<i>n</i> -Propylcyclopentane	3.6438
<i>ccc</i> -1,3,5-Trimethylcyclohexane	3.5263
1,1,4-Trimethylcyclohexane	3.6791
<i>ctt</i> -1,2,4-Trimethylcyclohexane	3.6107
<i>ctc</i> -1,2,4-Trimethylcyclohexane	3.5069
1,1,2-Trimethylcyclohexane	3.3354
Isobutylcyclopentane	3.7123
Isopropylcyclohexane	5.7233
<i>n</i> -Butylcyclopentane	3.6944
Isobutylcyclohexane	5.6729
<i>t</i> -1-Methyl-2-propylcyclohexane	3.8434
<i>t</i> -1-Methyl-2-(4MP)cyclopentane	3.7534

PIANO Olefins Mix

ASTM-P-0035-FAP \$ 240 / 100 µL

25 Olefins listed below at varying Wt. % typically in the range from 1.2 to 9.0 Wt. %. The actual certificate will have the exact Wt. % for each analyte.

	Typ. Wt. %
3-Methyl-1-butene	1.9396
1-Pentene	4.1355
2-Methyl-1-butene	1.4440
2-Methyl-1,3-butadiene	2.3889
<i>trans</i> -2-Pentene	1.8034
<i>cis</i> -2-Pentene	1.9792
4-Methylpentene-1	3.4372
1-Hexene	7.0484
<i>trans</i> -2-Hexene	1.7302
2-Methylpentene-2	3.3901
<i>cis</i> -2-Hexene	3.8765
1-Heptene	7.6134
<i>trans</i> -3-Heptene	3.3469
<i>cis</i> -3-Heptene	5.8657
<i>trans</i> -2-Heptene	3.7217
<i>cis</i> -2-Heptene	5.7679
1-Octene	7.6901
<i>trans</i> -2-Octene	1.9432
<i>cis</i> -2-Octene	3.9502
1-Nonene	7.6425
<i>trans</i> -3-Nonene	1.9972
<i>cis</i> -3-Nonene	4.0042
<i>trans</i> -2-Nonene	1.9848
<i>cis</i> -2-Nonene	2.7952
1-Decene	8.2053

Technical Note

We may add and/or subtract PIANO Analytes and vary the weight % for each Analyte. The certificate will reflect the exact Analyte composition.

PIANO Mixture

ASTM-P-0030-FAP

\$ 660 / 100 µL

139 comps.

The PIANO formulation contains the *n*-Paraffins, Isoparaffins, Aromatics, Naphthenes, and Olefins:
ASTM-P-0031-FAP, ASTM-P-0032-FAP, ASTM-P-0033-FAP, ASTM-P-0034-FAP, ASTM-P-0035-FAP.
 Approximate weight %'s for the total: *n*-Paraffins 18.5%, Isoparaffins 17.9%, Aromatics 23.6%, Naphthenes 20.9%, Olefins 19.0%. The certificate lists the weight % for all analytes in the formulation.

PIANO Mix Set

ASTM-PIANO-FAP-SET

\$ 1320 / 6 x 100 µL

Set includes the following ASTM-P-0030, ASTM-P-0031, ASTM-P-0032, ASTM-P-0033, ASTM-P-0034, ASTM-P-0035



ASTM

Detailed Hydrocarbon Analysis

ASTM D2789 Hydrocarbon Types in Low Olefinic Gas by MS

Hydrocarbon Mixture

D-2789-CTM
D-2789-CTM-PAK

\$ 40 / 1 x 1 mL
SAVE 20% \$ 160 / 5 x 1 mL
9 comps.

Technical Note

Both the actual volume percent ratio and the final weight fractions for each analyte will be listed on the certificate.

	Vol. %		Vol. %
2-Methylpentane	7.2	<i>cis</i> -1,2-Dimethylcyclohexane	15.5
2,4-Dimethylpentane	9.4	Benzene	7.7
<i>n</i> -Octane	16.6	Toluene	10
Methylcyclopentane	7.1	<i>p</i> -Xylene	16.5
Methylcyclohexane	10		

ASTM D2887 Boiling Range Distribution of Petroleum Fractions by GC

Calibration Mixture

DRH-002N
DRH-002N-10X

\$ 30 / 100 mg
\$ 40 / 1 gm
17 comps.

	Wt. %		Wt. %
<i>n</i> -Hexane	6	<i>n</i> -Octadecane	5
<i>n</i> -Heptane	6	<i>n</i> -Eicosane	2
<i>n</i> -Octane	8	<i>n</i> -Tetracosane	2
<i>n</i> -Nonane	8	<i>n</i> -Octacosane	1
<i>n</i> -Decane	12	<i>n</i> -Dotriacontane	1
<i>n</i> -Undecane	12	<i>n</i> -Hexatriacontane	1
<i>n</i> -Dodecane	12	<i>n</i> -Tetracontane	1
<i>n</i> -Tetradecane	12	<i>n</i> -Tetratetracontane	1
<i>n</i> -Hexadecane	10		

Hydrocarbon Window Defining Standard

DRH-008S-R2
DRH-008S-R2-PAK SAVE 20% \$ 65 / 1 x 1 mL
\$ 260 / 5 x 1 mL
500 µg/mL each in Chloroform 35 comps.

Octane	Nonadecane	Triacontane
Nonane	Phytane	<i>n</i> -Hentriacontane
Decane	Eicosane	Dotriacontane
Undecane	Heneicosane	Tritriacontane
Dodecane	Docosane	Tetraatriacontane
Tridecane	Tricosane	Pentatriacontane
Tetradecane	Tetracosane	Hexatriacontane
Pentadecane	Pentacosane	Heptatriacontane
Hexadecane	Hexacosane	Octatriacontane
Heptadecane	Heptacosane	Nonatriacontane
Octadecane	Octacosane	Tetracontane
Pristane	Nonacosane	

Fuel Oil Degradation/Retention Time Mix for Quantification of C₁₇/Pristane & C₁₉/Phytane ratios

DRH-005S-10X \$ 20 / 1 x 1 mL
2.0 mg/mL each in CH₂Cl₂:CS₂ (1:1) 4 comps.
DRH-005S-R1-10X \$ 25 / 1 x 1 mL
DRH-005S-R1-10X-PAK SAVE 20% \$ 100 / 5 x 1 mL
2.0 mg/mL each in Chloroform 4 comps.

Heptadecane
Octadecane
Phytane (2,6,10,14-Tetramethylhexadecane)
Pristane (2,6,10,14-Tetramethylpentadecane)

Technical Note

AccuStandard offers a hydrocarbon window defining standard with the C₉ to C₄₀ odd and even alkanes. As an added benefit, pristane and phytane are included in the formulation. Use of this one standard measuring the C₁₇/pristane and C₁₉/phytane ratio can be used to estimate degradation of fuel oil.

Also available is a fuel oil degradation mixture containing just the four required analytes to determine the C₁₇/pristane and C₁₉/phytane ratio (DRH-005S-10X).

Column Test Mixture

D-2887
1% v/v in *n*-Octane

\$ 10 / 1 x 1 mL
2 comps.

n-Hexadecane *n*-Octadecane

Reference Gas Oil Sample Lot #2

D-2887-REFOIL \$ 35 / 1 x 1 mL

Calibration Solutions

DRH-002S-R1
DRH-002S-R1-PAK

\$ 50 / 1 x 1 mL
SAVE 20% \$ 200 / 5 x 1 mL
17 comps.

At stated conc. in Chloroform

	µg/mL		µg/mL
<i>n</i> -Hexane	600	<i>n</i> -Octadecane	500
<i>n</i> -Heptane	600	<i>n</i> -Eicosane	200
<i>n</i> -Octane	800	<i>n</i> -Tetracosane	200
<i>n</i> -Nonane	800	<i>n</i> -Octacosane	100
<i>n</i> -Decane	1200	<i>n</i> -Dotriacontane	100
<i>n</i> -Undecane	1200	<i>n</i> -Hexatriacontane	100
<i>n</i> -Dodecane	1200	<i>n</i> -Tetracontane	100
<i>n</i> -Tetradecane	1200	<i>n</i> -Tetratetracontane	100
<i>n</i> -Hexadecane	1000		

DRH-002S-R2
DRH-002S-R2-PAK

\$ 50 / 1 x 1 gm
SAVE 20% \$ 200 / 5 x 1 gm
20 comps.

0.1 % Wt./Wt. each in Chloroform

<i>n</i> -Tetratetracontane	<i>n</i> -Octadecane	<i>n</i> -Octane
<i>n</i> -Tetracontane	<i>n</i> -Hexadecane	<i>n</i> -Heptane
<i>n</i> -Hexatriacontane	<i>n</i> -Tetradecane	<i>n</i> -Hexane
<i>n</i> -Dotriacontane	<i>n</i> -Dodecane	<i>n</i> -Pentane
<i>n</i> -Octacosane	<i>n</i> -Undecane	<i>n</i> -Pentadecane
<i>n</i> -Tetracosane	<i>n</i> -Decane	<i>n</i> -Heptadecane
<i>n</i> -Eicosane	<i>n</i> -Nonane	

Reformulated to ship by Air

ASTM Simulated Distillation (SIM DIS)



Simulated Distillation (SIM DIS) and Proposed Motor Oil Volatility Method

AccuStandard has developed an extensive line of SIM DIS standards for normal and high temperature analytical requirements when generating boiling point versus retention time calibration curves. Since normal paraffins above Alkane C60 are not readily available, Polywax 500, 655, 850 and 1000 standards have been incorporated to perform SIM DIS analysis of heavy petroleum fractions with boiling points up to 1350°F.

SIM DIS Simulated Distillation Standards

Stock SIM DIS Paraffin Solution

ASTM-P-0050 \$ 85 / 1 x 5 mL
14 comps.

	Wt. %		Wt. %
<i>n</i> -Pentane	6.66	<i>n</i> -Dodecane	13.33
<i>n</i> -Hexane	6.66	<i>n</i> -Tetradecane	6.66
<i>n</i> -Heptane	6.66	<i>n</i> -Pentadecane	6.66
<i>n</i> -Octane	6.66	<i>n</i> -Hexadecane	6.66
<i>n</i> -Nonane	6.66	<i>n</i> -Heptadecane	6.66
<i>n</i> -Decane	6.66	<i>n</i> -Octadecane	6.66
<i>n</i> -Undecane	6.66	<i>n</i> -Eicosane	6.66

Working Level SIM DIS Paraffin Solution with Polywax 500

ASTM-P-0052 \$ 40 / 1 x 1 mL
ASTM-P-0052-PAK **SAVE 20%** \$ 160 / 5 x 1 mL
At stated conc. in Carbon disulfide 15 comps.

	Wt. %		Wt. %
<i>n</i> -Pentane	0.0333	<i>n</i> -Tetradecane	0.0333
<i>n</i> -Hexane	0.0333	<i>n</i> -Pentadecane	0.0333
<i>n</i> -Heptane	0.0333	<i>n</i> -Hexadecane	0.0333
<i>n</i> -Octane	0.0333	<i>n</i> -Heptadecane	0.0333
<i>n</i> -Nonane	0.0333	<i>n</i> -Octadecane	0.0333
<i>n</i> -Decane	0.0333	<i>n</i> -Eicosane	0.0333
<i>n</i> -Undecane	0.0333	Polywax 500	0.5
<i>n</i> -Dodecane	0.0666		



Carbon disulfide can not ship by air. When possible alternate solvents can be used. Please contact our Technical Service Department for other options.

Polywax 850®

ASTM-P-0137N-2G \$ 20 / 2 grams

Polywax 850

Polywax 1000®

ASTM-P-0138N-2G \$ 20 / 2 grams

Polywax 1000

Polywax 500®

ASTM-P-0051N-2G \$ 20 / 2 grams

Polywax 500

Polywax 655®

ASTM-P-0053N-2G \$ 20 / 2 grams

Polywax 655

Standards of Interest

See ASTM Methods D3710, D5307, D5442, D6352 for additional calibration standards for hydrocarbon analysis.

ASTM D3120 & D3246 Trace Quantities of Sulfur in Light Liquid Petroleum Hydrocarbons by Oxidative Microcoulometry

Sulfur Calibration Set

D-3120-92-CAL-SET

\$ 75 / set of 8 x 1 mL

In Isooctane

Sulfur Conc.	Sulfur Wt. %	Cat. No.	Sulfur Conc.	Sulfur Wt. %	Cat. No.
Blank	—	D-3120-92-BL	30 µg/g	0.0030	D-3120-92-30X
1 µg/g	0.0001	D-3120-92-1X	50 µg/g	0.0050	D-3120-92-50X
3 µg/g	0.0003	D-3120-92-3X	75 µg/g	0.0075	D-3120-92-75X
10 µg/g	0.0010	D-3120-92-10X	100 µg/g	0.010	D-3120-92-100X

Technical Note

Well characterized di-*n*-butyl sulfide is used in a low sulfur Isooctane matrix for this calibration set.

As the matrix may contain some native sulfur, AccuStandard encourages purchasing sulfur blanks for calibration analysis

ASTM D3230 Determination of Salts in Crude Oil

see page 405

ASTM D3231 Determination of Phosphorus in Gasoline

see page 350

ASTM D3237 Lead in Gasoline by AA Spectroscopy

see page 405

ASTM D3246 Sulfur in Petroleum Gas by Oxidative Microcoulometry

see pages 276-279

ASTM D3340 Li & Na in Lubricating Greases by Flame Photometer

see page 355

ASTM D3524 Diesel Fuel Diluent in Used Diesel Engine Oils by GC

Calibration Curve

D-3524-CAL-5ML-SET

\$ 150 / 6 x 5 mL

D-3524-CAL-10ML-SET

\$ 250 / 6 x 10 mL

Analyte	Std. 1	Std. 2	Std. 3	Std. 4	Std. 5	Std. 6
Target Wt. %	Target Wt. %	Target Wt. %	Target Wt. %	Target Wt. %	Target Wt. %	Target Wt. %
# 2 Diesel	10	7.5	5.0	2.5	1.0	0
30 W Motor oil	90	92.5	95	97.5	99	100

Internal Standard

D-3524-IS-10ML

\$ 20 / 1 x 10 mL

D-3524-IS-10ML-PAK **SAVE 20%** \$ 100 / 5 x 10 mL

At stated conc. in *n*-Heptane 2 comps.

	Wt./Wt. %
<i>n</i> -Decane	1.0
<i>n</i> -Octadecane	0.2

Mid Level Daily QC Solution

D-3524-QC-10ML

\$ 30 / 1 x 10 mL

At stated conc.

2 comps.

	Wt. / Wt. %
# 2 Diesel	5.0
30 W Motor oil	95.0

Column Resolution Mix

D-3524-CR

\$ 10 / 1 x 1 mL

D-3524-CR-PAK

SAVE 20% \$ 40 / 5 x 1 mL

At stated conc. in *n*-Heptane

2 comps.

	Wt. / Wt. %
<i>n</i> -Hexadecane	1.0
<i>n</i> -Octadecane	1.0

ASTM D3605 Trace Metals in Gas Turbine Fuels by AA & Flame Emission & Spectroscopy

see page 405



ASTM D3606 Benzene & Toluene in Finished Motor & Aviation Gasoline by GC

Aromatics Quantitative Calibration Standards

Without Internal Standards

D-3606-25ML-SET

\$ 800 / 7 x 25 mL

Analyte	Std. 1	Std. 2	Std. 3	Std. 4	Std. 5	Std. 6	Std. 7
Calibr. range	Target Vol. %	Vol. %	Vol. %	Vol. %	Vol. %	Vol. %	Vol. %
Benzene	0.06 - 5.0	5.00	2.50	1.25	0.67	0.33	0.12
Toluene	0.5 - 20	20.00	15.00	10.00	5.00	2.50	1.00
Isooctane		75.00	82.50	88.75	94.33	97.17	98.88



With Internal Standard: MEK

D-3606/IS-SET

\$ 115 / 7 x 1 mL

D-3606/IS-2ML-SET

\$ 190 / 7 x 2 mL

D-3606/IS-2ML-SET-PAK

\$ 760 / 5 x (7 x 2) mL

Analyte	Std. 1	Std. 2	Std. 3	Std. 4	Std. 5	Std. 6	Std. 7
Calibr. range	Target Vol. %	Vol. %	Vol. %	Vol. %	Vol. %	Vol. %	Vol. %
Benzene	0.06 - 5.0	4.8	2.4	1.2	0.6432	0.3168	0.1152
Toluene	0.5 - 20	19.2	14.4	9.6	4.8000	2.4000	0.9600
Isooctane		72.0	79.2	85.2	90.5568	93.2832	94.9248
Methyl ethyl ketone (Internal Std.)	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Aromatics Quantitative Calibration Standard

With Internal Standard: sec Butanol

D-3606/IS2-SET

\$ 115 / 7 x 1 mL

D-3606/IS2-SET-PAK

\$ 460 / 5 x (7 x 1) mL

Analyte	Std. 1	Std. 2	Std. 3	Std. 4	Std. 5	Std. 6	Std. 7
Calibr. range	Target Vol. %	Vol. %	Vol. %	Vol. %	Vol. %	Vol. %	Vol. %
Benzene	0.06 - 5.0	4.8	2.4	1.2	0.6432	0.3168	0.1152
Toluene	0.5 - 20	19.2	14.4	9.6	4.8000	2.4000	0.9600
Isooctane		72.0	79.2	85.2	90.5568	93.2832	94.9248
sec Butanol (Internal Std.)	4.0	4.0	4.0	4.0	4.0	4.0	4.0

Technical Note

Due to the possible use of other oxygenates (i.e. ethanol) in gasoline, a calibration curve using sec-butanol as an internal standard has been formulated. The use of this internal standard minimizes coelution caused by the oxygenate(s) and pre column - standard column configuration in the GC system.

Aromatics Quantitative Calibration Curve

D-3606/IS2-R1-SET

\$ 115 / set of 7 x 1 mL

Analyte	Std. 1	Std. 2	Std. 3	Std. 4	Std. 5	Std. 6	Std. 7
Calibr. range	Target Vol. %	Vol. %	Vol. %	Vol. %	Vol. %	Vol. %	Vol. %
Benzene	0.06 - 5.0	5	4.2	3.4	2.6	1.7	0.9
Toluene	0.5 - 20	20	17	14	11	8	5
Isooctane		75	78.8	82.6	86.4	90.3	94.1
sec Butanol (Internal Std.)	4	4	4	4	4	4	4

Daily Gasoline Refinery Quality Control Standards

With Internal Standard: sec Butanol

D-3606-QC-IS2-25ML

\$ 125 / 1 x 25 mL

D-3606-QC-IS2-25ML-PAK

\$ 600 / 5 x 25 mL

Each at stated quantities

4 comps.

Compound	Target Vol. %
Benzene	0.6432
Toluene	4.8000
Isooctane	90.5568
sec-Butanol (Internal Std.)	4.0v

100

With Internal Standard: MEK

D-3606-QC/IS-10ML

\$ 75 / 1 x 10 mL

D-3606-QC/IS-10ML-PAK

\$ 300 / 5 x 10 mL

Each at stated quantities

4 comps.

Compound	Target Vol. %
Benzene	0.6432
Toluene	4.8000
Isooctane	90.5568
Methyl ethyl ketone (Internal Std.)	4.0

100

Without Internal Standard

D-3606-QC-25ML

\$ 125 / 1 x 25 mL

D-3606-QC-25ML-PAK

\$ 500 / 5 x 25 mL

Each at stated quantities

3 comps.

Compound	Target Vol. %
Benzene	0.67
Toluene	5.00
Isooctane	94.33

100

ASTM D3710 Boiling Range Distribution of Gasoline & Gasoline Fractions by GC

This **SIM DIS** (Simulated Distillation or GCD) Method is used to determine the boiling range distribution of gasoline and gasoline components. ASTM Method D3710 is used for petroleum products and fractions with a final boiling point of 500°F (260°C) or lower. By having an insight into the composition of the gasoline blend, essential data for the calculation of vapor pressure and a prediction of the D86 distillation curve can be made.

Qualitative Calibration Standard

D-3710-QUAL \$ 50 / 1 x 1 mL
 D-3710-QUAL-PAK **SAVE 20%** \$ 200 / 5 x 1 mL
 19 comps.

Quantitative Calibration Standard

D-3710 \$ 40 / 1 x 1 mL
 D-3710-PAK **SAVE 20%** \$ 160 / 5 x 1 mL
 16 comps.

Approx. Wt./ Wt. %		Approx. Wt./ Wt. %		Vol./Vol. %		Vol./Vol. %	
<i>n</i> -Butane	4.5	<i>n</i> -Octane	5.4	<i>n</i> -Butylbenzene	3.5	<i>n</i> -Octane	5.8
<i>n</i> -Butylbenzene	3.2	<i>n</i> -Pentadecane	2.2	<i>n</i> -Decane	3.5	<i>n</i> -Pentadecane	2.3
<i>n</i> -Decane	3.2	<i>n</i> -Pentane	7.6	2,4-Dimethylpentane	5.8	<i>n</i> -Pentane	8.1
2,4-Dimethylpentane	5.4	<i>n</i> -Propane	1.5	<i>n</i> -Dodecane	3.5	<i>n</i> -Propylbenzene	4.7
<i>n</i> -Dodecane	3.2	<i>n</i> -Propylbenzene	4.3	<i>n</i> -Heptane	10.5	<i>n</i> -Tetradecane	2.3
<i>n</i> -Heptane	9.7	<i>n</i> -Tetradecane	2.2	<i>n</i> -Hexane	5.8	Toluene	11.6
<i>n</i> -Hexane	5.4	Toluene	10.8	2-Methylbutane	10.5	<i>n</i> -Tridecane	2.3
2-Methylbutane	9.7	<i>n</i> -Tridecane	2.2	2-Methylpentane	5.8	<i>p</i> -Xylene	14.0
2-Methylpentane	5.4	<i>p</i> -Xylene	13				
2-Methylpropane	1.5						

ASTM D2887 Boiling Range Distribution of Petroleum Fractions by GC

Calibration Solution

DRH-002S-R1
 DRH-002S-R1-PAK
 At stated conc. in Chloroform

\$ 50 / 1 x 1 mL
SAVE 20% \$ 200 / 5 x 1 mL
 17 comps.

Reformulated to ship by Air

µg/mL	µg/mL	µg/mL	µg/mL
<i>n</i> -Hexane 600	<i>n</i> -Undecane 1200	<i>n</i> -Octadecane 500	<i>n</i> -Dotriacontane 100
<i>n</i> -Heptane 600	<i>n</i> -Dodecane 1200	<i>n</i> -Eicosane 200	<i>n</i> -Hexatriacontane 100
<i>n</i> -Octane 800	<i>n</i> -Tetradecane 1200	<i>n</i> -Tetracosane 200	<i>n</i> -Tetracontane 100
<i>n</i> -Nonane 800	<i>n</i> -Hexadecane 1000	<i>n</i> -Octacosane 100	<i>n</i> -Tetratetracontane 100
<i>n</i> -Decane 1200			

ASTM D3798 Analysis of *p*-Xylene by GC

p-Xylene Impurity Standards

With Internal Standard

D-3798-IS \$ 30 / 1 x 1 mL
 D-3798-IS-PAK **SAVE 20%** \$ 120 / 5 x 1 mL
 At stated conc. by weight 11 comps.

Without Internal Standard

D-3798-10ML \$ 65 / 1 x 10 mL
 D-3798-10ML-PAK **SAVE 20%** \$ 260 / 5 x 10 mL
 At stated conc. by weight 10 comps.

Wt./Wt. %		Wt./Wt. %		Wt./Wt. %		Wt./Wt. %	
<i>n</i> -Pentane 0.15	<i>o</i> -Xylene 0.15	<i>n</i> -Pentane 0.15	<i>p</i> -Xylene 98.65	<i>n</i> -Pentane 0.15	<i>p</i> -Xylene 98.65	<i>n</i> -Octane 0.15	<i>m</i> -Xylene 0.15
<i>n</i> -Octane 0.15	Cumene 0.15	<i>n</i> -Octane 0.15	<i>m</i> -Xylene 0.15	Benzene 0.15	<i>o</i> -Xylene 0.15	Benzene 0.15	Cumene 0.15
Benzene 0.15	Propylbenzene 0.15	Benzene 0.15	<i>o</i> -Xylene 0.15	Toluene 0.15	Cumene 0.15	Toluene 0.15	Propylbenzene 0.15
Ethylbenzene 0.15	Total Analytes 100	Ethylbenzene 0.15	Propylbenzene 0.15				
<i>p</i> -Xylene 98.65	plus <i>n</i> -Undecane* (ISTD) 0.500						
<i>m</i> -Xylene 0.15	grams						

Technical Note

Other internal standards can be used in conjunction with the bulk packaged D-3798 (1 x 10 mL) to meet your specific application. If you prefer to eliminate making standards, contact our Technical Service Department with your unique formulation for a custom quotation. A custom quotation request form is located in the back of this catalog.

ASTM D3831 Manganese in Gasoline by AA Spectroscopy

see page 405

ASTM D4059 Polychlorinated Biphenyls in Insulating Liquids by GC

Solutions in PCB-Free Transformer Oil (Individuals, 2 Concentrations)

Aroclor #	Conc.	Individual Price	PAK SAVE 20%	Aroclor #	Conc.	Individual Price	PAK SAVE 20%
CAS No.	ppm w/w	Cat. No. 1 mL	Cat. No. 5 x 1 mL	CAS No.	ppm w/w	Cat. No. 1 mL	Cat. No. 5 x 1 mL
Aroclor 1016	50	C-216-ST-1 \$ 25	C-216-ST-1-PAK \$ 100	Aroclor 1262	50	C-262-ST-1 25	C-262-ST-1-PAK 100
12674-11-2	500	C-216-ST-2 30	C-216-ST-2-PAK 120	37324-23-5	500	C-262-ST-2 30	C-262-ST-2-PAK 120
Aroclor 1221	50	C-221-ST-1 25	C-221-ST-1-PAK 100	Aroclor 1268	50	C-268-ST-1 25	C-268-ST-1-PAK 100
11104-28-2	500	C-221-ST-2 30	C-221-ST-2-PAK 120	11100-14-4	500	C-268-ST-2 75	C-268-ST-2-PAK 300
Aroclor 1232	50	C-232-ST-1 25	C-232-ST-1-PAK 100				
11141-16-5	500	C-232-ST-2 75	C-232-ST-2-PAK 300				
Aroclor 1242	50	C-242-ST-1 25	C-242-ST-1-PAK 100				
53469-21-9	500	C-242-ST-2 30	C-242-ST-2-PAK 120				
Aroclor 1248	50	C-248-ST-1 25	C-248-ST-1-PAK 100				
12672-29-6	500	C-248-ST-2 30	C-248-ST-2-PAK 120				
Aroclor 1254	50	C-254-ST-1 25	C-254-ST-1-PAK 100				
11097-69-1	500	C-254-ST-2 30	C-254-ST-2-PAK 120				
Aroclor 1260	50	C-260-ST-1 25	C-260-ST-1-PAK 100				
11096-82-5	500	C-260-ST-2 30	C-260-ST-2-PAK 120				

Neats (Individuals)

Aroclor #	Cat. No.	Price / Unit
Aroclor 1016	C-216N	\$ 40 / 100 mg
Aroclor 1221	C-221N-50MG	50 / 50 mg
Aroclor 1242	C-242N-50MG	25 / 50 mg
Aroclor 1248	C-248N-50MG	40 / 50 mg
Aroclor 1254	C-254N-50MG	55 / 50 mg
Aroclor 1260	C-260N-50MG	40 / 50 mg
Aroclor 1262	C-262N-50MG	40 / 50 mg

Aroclor-free Transformer Oil

T-W130 \$ 10 / 1 x 1 mL



ASTM D4291 Trace Ethylene Glycol in Used Engine Oil

D-4291-93 \$ 20 / 5 x 1 mL
 D-4291-93-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 2000 µg/mL in water
 Ethylene glycol

ASTM D4294 Sulfur in Petroleum Products by ED-XRF Spectroscopy

see pages 276-279

ASTM D4377 Water in Crude oils by Potentiometric Karl Fischer Titration

see pages 275, 312

ASTM D4420 Aromatics in Finished Gasoline by GC

see page 402

Aromatics in Gasoline by GC/TC

D-4420-CAL-SET

Analyte	\$ 105 / set of 7 x 1 mL							
	Std. 1 Target Vol. %	Std. 2 Target Vol. %	Std. 3 Target Vol. %	Std. 4 Target Vol. %	Std. 5 Target Vol. %	Std. 6 Target Vol. %	Std. 7 Target Vol. %	
Benzene	0.05	0.10	0.25	0.75	1.25	2.50	5.00	
Toluene	0.5	1.00	2.50	5.00	10.00	15.00	25.00	
Total Xylenes (C ₈ aromatics)	5	10.00	15.00	20.00	25.00	1.00	3.00	
n-Butylbenzene (C ₉ + aromatics)	30.00	25.00	20.00	10.00	5.00	15.00	2.50	
Isooctane	64.45	63.90	62.25	64.25	58.75	66.50	64.50	

D-4420-94 \$ 20 / 1 x 1 mL
 D-4420-94-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 5 comps.
 Vol. %
 Benzene 3.00
 Toluene 10.00
 Total Xylenes (C₈ aromatics) 15.00
 n-Butylbenzene(C₉ + aromatics) 15.00
 Isooctane 57.00

ASTM D4628 Barium, Calcium, Magnesium & Zinc in Unused Lubricating Oil

see page 402

ASTM D4629 Trace Nitrogen in Liquid Petroleum Hydrocarbons by Syringe/Inlet Oxidative Combustion and Chemiluminescence Detection. IP 379/88

D4629 is used to determine trace total nitrogen naturally found in liquid hydrocarbons boiling from 50 to 400°C with viscosities 0.2 - 10 cSt. This method monitors feed stocks for nitrogen to prevent the poisoning of some process catalysts when trace nitrogenous materials are present.

Nitrogen Calibration Set - Low Boiling Solvents

D-4629-LB-CAL-R1-SET

Nitrogen introduced using Pyridine

\$ 85 / 8 x 1 mL

Set includes the following Cat. No.s

Each in Isooctane	Cat. No.	Price / 1 mL	Each in Isooctane	Cat. No.	Price / 1 mL
Blank	D-4629-91-LB-BL	\$ 20	Nitrogen @ 25 µg/mL	D-4629-91-LB-25X	\$ 20
Nitrogen @ 0.3 µg/mL	D-4629-91-LB-0.3X	20	Nitrogen @ 50 µg/mL	D-4629-91-LB-50X	20
Nitrogen @ 1 µg/mL	D-4629-91-LB-1X	20	Nitrogen @ 75 µg/mL	D-4629-91-LB-75X	20
Nitrogen @ 10 µg/mL	D-4629-91-LB-10X	20	Nitrogen @ 100 µg/mL	D-4629-91-LB-100X	20

Stock Nitrogen Solution Low Boiling Solvents

D-4629-91-LB-CON \$ 20 / 1 x 1 mL
 D-4629-91-LB-CON-PAK \$ 80 / 5 x 1 mL
 1000 µg/mL in Isooctane

Nitrogen introduced using Pyridine

Nitrogen Calibration Set - High Boiling Solvents

D-4629-HB-CAL-R1-SET

Nitrogen introduced using Carbazole

\$ 85 / set of 8 x 1 mL

Set includes the following Cat. No.s

Each in Toluene	Cat. No.	Price / 1 mL	Each in Toluene	Cat. No.	Price / 1 mL
Blank	D-4629-91-HB-BL	\$ 20	Nitrogen @ 25 µg/mL	D-4629-91-HB-25X	\$ 20
Nitrogen @ 0.3 µg/mL	D-4629-91-HB-0.3X	20	Nitrogen @ 50 µg/mL	D-4629-91-HB-50X	20
Nitrogen @ 1 µg/mL	D-4629-91-HB-1X	20	Nitrogen @ 75 µg/mL	D-4629-91-HB-75X	20
Nitrogen @ 10 µg/mL	D-4629-91-HB-10X	20	Nitrogen @ 100 µg/mL	D-4629-91-HB-100X	20

Stock Nitrogen Solution High Boiling Solvents

D-4629-91-HB-CON \$ 20 / 1 x 1 mL
 D-4629-91-HB-CON-PAK \$ 80 / 5 x 1 mL
 1000 µg/mL in Toluene:Acetone (9:1)

Nitrogen introduced using Carbazole

Nitrogen Calibration Set - Low Level

ASTM-P-0070-SET

Nitrogen introduced using Aniline

\$ 75 / 6 x 1 mL

Set includes the following Cat. No.s

Each in Isooctane	Cat. No.	Unit	Each in Isooctane	Cat. No.	Unit
Isooctane Blank	ASTM-P-0070-BL	1 mL	Nitrogen @ 2.0 µg/g	ASTM-P-0070-4X	1 mL
Nitrogen @ 0.5 µg/g	ASTM-P-0070-1X	1 mL	Nitrogen @ 5.0 µg/g	ASTM-P-0070-10X	1 mL
Nitrogen @ 1.0 µg/g	ASTM-P-0070-2X	1 mL	Nitrogen @ 10.0 µg/g	ASTM-P-0070-20X	1 mL

Low Level Nitrogen & Sulfur Calibration Set

ASTM-P-0071-SET

The Nitrogen is introduced using Aniline and the Sulfur is introduced using di-n-butyl sulfide

\$ 50 / 4 x 1 mL

Set includes the following Cat. No.s


Concentration in Benzene	Cat. No.	Unit
Benzene Blank	ASTM-P-0071-BL	1 mL
Nitrogen @ 0.25 µg/g & Sulfur @ 0.25 µg/g	ASTM-P-0071-01	1 mL
Nitrogen @ 0.50 µg/g & Sulfur @ 0.50 µg/g	ASTM-P-0071-02	1 mL
Nitrogen @ 1.00 µg/g & Sulfur @ 1.00 µg/g	ASTM-P-0071-03	1 mL

ASTM D4815 MtBE, EtBE, TAME, DIPE, Tertiary-amyl & C1 to C4 Alcohols in Gasoline by GC

Oxygenate Quantitative Calibration Mixtures Without Internal Standard

D-4815-10ML-SET

\$ 300 / set of 5 x 10 mL of 5 component mix



Analyte	Target Concentrations				
	Std. 1 Wt. %	Std. 2 Wt. %	Std. 3 Wt. %	Std. 4 Wt. %	Std. 5 Wt. %
Ethanol	3.00	0.10	6.00	9.00	12.00
<i>t</i> -Butanol	0.10	3.00	6.00	8.00	12.00
Methyl <i>t</i> -butyl ether (<i>MtBE</i>)	20.0	15.00	10.00	5.00	0.10
<i>t</i> -Pentanol	1.25	5.00	2.50	3.75	0.10
Isooctane/xylene (65:35)	75.65	76.90	75.50	74.25	75.80

With Internal Standard

D-4815/IS-SET of 6 component mix

D-4815/IS-SET-PAK

\$ 125 / set of 5 x 1 mL
\$ 500 / set of 5 x (5 x 1 mL)

Analyte	Calibration Range	Target Concentrations				
		Std. 1 Wt. %	Std. 2 Wt. %	Std. 3 Wt. %	Std. 4 Wt. %	Std. 5 Wt. %
Ethanol	0.1 - 11.40	2.85	0.095	5.70	8.55	11.40
<i>t</i> -Butanol	0.1 - 11.40	0.095	2.85	5.70	7.60	11.40
Methyl <i>t</i> -butyl ether (<i>MtBE</i>)	0.1 - 19.0	19.00	14.25	9.50	4.75	0.095
<i>t</i> -Pentanol	0.1 - 4.79	1.19	4.75	2.38	3.56	0.095
1,2-Dimethoxyethane (<i>DME</i>) (Internal Std.)		5.00	5.00	5.00	5.00	5.00
Isooctane/xylene (65:35)		71.87	73.06	71.73	70.54	72.01
Total Oxygenates & Internal Standard		28.14	26.95	28.28	29.46	28.00

Oxygenate Internal Standard

M-GRO-IS-5ML

\$ 10 / 1 x 5 mL

M-GRO-IS-5ML-PAK

SAVE 20% \$ 40 / 5 x 5 mL

1,2-Dimethoxyethane (neat)

Oxygenate Free Refinery Gasoline Blank

RFA-BLNK-10ML

\$ 10 / 1 x 10 mL

RFA-BLNK-10ML-PAK SAVE 20% \$ 40 / 5 x 10 mL

RFA Gasoline (neat)

Quantitative Peak ID and Retention Time Mixture

D-4815-RT

\$ 25 / 1 x 1 mL

D-4815-RT-PAK

SAVE 20% \$ 100 / 5 x 1 mL

16 comp. core mix

	Wt. %
Methylcyclopentane	4.00
Methanol	7.30
Ethanol	7.30
Isopropanol	7.30
<i>tert</i> -Butanol	7.30
<i>n</i> -Propanol	7.30
Methyl <i>tert</i> -butyl ether (<i>MtBE</i>)	4.00
<i>sec</i> -Butanol	7.30
Diisopropyl ether (<i>DIPE</i>)	4.00
Isobutanol	7.30
Ethyl <i>tert</i> -butyl ether (<i>EtBE</i>)	4.00
<i>tert</i> -Pentanol	7.30
1,2-Dimethoxyethane (ISTD)	6.00
<i>n</i> -Butanol	7.30
Benzene	5.00
<i>tert</i> -Amyl methyl ether	7.30
	100

Valve Timing Mixture

D-4815-VT

\$ 25 / 1 x 1 mL

D-4815-VT-PAK

SAVE 20% \$ 100 / 5 x 1 mL

5 comps.

	Wt. %
Methylcyclopentane	10.00
Diisopropyl ether (<i>DIPE</i>)	10.00
Ethyl <i>tert</i> -butyl ether (<i>EtBE</i>)	10.00
Methyl <i>tert</i> -butyl ether (<i>MtBE</i>)	10.00
<i>n</i> -Hexane	60.00

ASTM D4927 Elemental Analysis of Lubricant and Additive Components - Barium, Calcium, Phosphorus, Sulfur, and Zinc by WD-XRF Spectroscopy see page 402

ASTM D4928 Water in Crude oils by Potentiometric Karl Fischer Titration see page 275

ASTM D4929 Organic Chloride Content in Crude Oil - Test Method B Combustion and Microcoulometry

Working Level Chlorine Standard

D-4929-94

\$ 10 / 1 x 5 mL

D-4929-94-PAK

SAVE 20% \$ 40 / 5 x 5 mL

10 µg/mL in Isooctane

Chlorine

Stock Chlorine Standard

D-4929-94-100X

\$ 15 / 1 x 5 mL

D-4929-94-100X-PAK

SAVE 20% \$ 60 / 5 x 5 mL

1000 µg/mL in Isooctane

Chlorine

Chlorine in Lube Oils

ASTM-P-0092-100ML-SET

\$ 475 / set of 7 x 100 mL

Each in 75 cSt mineral oil

Cat. No.	Chlorine Wt. %	Chlorine µg/g	Unit	Price
ASTM-P-0092-BL-100ML	Blank	Blank	100 mL	\$ 75
ASTM-P-0092-0.1X-100ML	0.001	10	100 mL	75
ASTM-P-0092-1X-100ML	0.01	100	100 mL	75
ASTM-P-0092-5X-100ML	0.05	500	100 mL	75
ASTM-P-0092-10X-100ML	0.1	1,000	100 mL	75
ASTM-P-0092-100X-100ML	1	10,000	100 mL	75
ASTM-P-0092-500X-100ML	5	50,000	100 mL	75

ASTM D4951 Additive Elements in Lubricating Oils by Inductively Coupled Plasma Atomic Emission Spectrometry see page 403

ASTM D5056 Trace Metals in Petroleum Coke by AA see pages 354-356



ASTM D5059 Lead in Gasoline by X-Ray Spectroscopy IP Designation 228/79

Part A - Lead in Gasoline Standards

D-5059-A-CAL-100ML-SET ▲

\$ 450 / 7 x 100 mL

7 solutions in Isooctane

Lead Concentration			Cat. No.	Price 100 mL
g Pb/US gal	g Pb/ UK gal	mg Pb/mL		
0.0000	0.000	0.000	D-5059-A-01-100ML ▲	\$ 10
0.1000	0.120	0.026	D-5059-A-02-100ML ▲	80
1.0000	1.200	0.264	D-5059-A-03-100ML ▲	80
2.0000	2.400	0.528	D-5059-A-04-100ML ▲	80
3.0000	3.600	0.793	D-5059-A-05-100ML ▲	80
4.0000	4.800	1.057	D-5059-A-06-100ML ▲	80
5.0000	6.000	1.321	D-5059-A-07-100ML ▲	80

Internal Standard

D-5059-IS-100ML

\$ 80 / 1 x 100 mL

D-5059-IS-10ML-PAK

\$ 60 / 5 x 10 mL ampules

0.793 mg/mL in Mineral Oil

Bismuth



Part C - Lead in Gasoline Standards

D-5059-C-CAL-100ML-SET ▲

\$ 450 / set of 7 x 100 mL

The set contains the following 7 solutions in Isooctane

Lead Concentration			Cat. No.	Price 100 mL
g Pb/US gal	g Pb/ UK gal	µg Pb/mL		
0.0000	0.000	0.000	D-5059-C-01-100ML ▲	\$ 10
0.0010	0.001	0.264	D-5059-C-02-100ML ▲	80
0.0050	0.006	1.321	D-5059-C-03-100ML ▲	80
0.0100	0.012	2.642	D-5059-C-04-100ML ▲	80
0.0500	0.060	13.209	D-5059-C-05-100ML ▲	80
0.1000	0.120	26.417	D-5059-C-06-100ML ▲	80
0.3000	0.360	79.252	D-5059-C-07-100ML ▲	80

Technical Note

AccuStandard has formulated D5059 standards to measure the lead content in gasoline for both high and low concentrations using bismuth as an internal standard. The 100 mL quantities are designed for laboratories analyzing many samples while the 10 mL ampules are for laboratories that have limited requests for the test method. Should you require bulk quantities of the internal standard packaged in single-use ampules, contact our Technical Service Department for a quotation.

Technical Note

Certificates for D5059 standards have the lead content listed in 3 concentration units.

ASTM D5134 Petroleum Naphthas through n-Nonane by Capillary GC

Qualitative Reference Petroleum Set

D-5134-92-SET

\$ 75 / 3 x 1 mL

Qualitative Reference Standards	Cat. No.	Price / 1 mL
Alkylate Standard neat fraction approx. 30 comps. identified	D-5134-92-ALK	\$ 30
Naphtha Standard neat fraction approx. 70 comps. identified	D-5134-92-NAP	30
Reformate Standard neat fraction approx. 100 comps. identified	D-5134-92-REF	20

Column Evaluation Mix

D-5134-92-CEM

\$ 35 / 1 x 1 mL

7 comps.

Linearity Check Mix

D-5134-92-LCM-PAK

\$ 55 / 5 x 50 mg

10% w/w each component

10 comps.

	Wt. / Wt. %	Wt. / Wt. %
Toluene	0.5	4-Methylheptane 1.0
n-Heptane	1.0	n-Octane 1.0
2,3,3-Trimethylpentane	1.0	2-Methylpentane 94.5
2-Methylheptane	1.0	

Benzene	2-Methylheptane
2,4-Dimethylheptane	2-Methylhexane
2,4-Dimethylhexane	n-Nonane
n-Heptane	n-Octane
n-Hexane	Toluene

ASTM D5184 Al and Si in Fuel Oils by Ashing, Fusion, ICP-AES & AA Spectrometry

see page 392

ASTM D5185 Additive Elements, Wear Metals & Contaminants in Used Lubricating Oils by ICP-AES

see pages 397, 402-404

ASTM D5186 Aromatic Content & Polynuclear Aromatic Content of Diesel Fuels & Aviation Turbine Fuels by SFC

Performance Solution

D-5186-96-PM

\$ 40 / 1 x 1 mL

D-5186-96-PM-PAK SAVE 20% \$ 160 / 5 x 1 mL

At stated approx. Wt. %

4 comps.

	Wt./Wt. %	Wt./Wt. %
n-Hexadecane	75	Tetralin 3.0
Naphthalene	2.0	Toluene 20

Detector Linearity

Check Solution Set

D-5186-96-DLC-SET

\$ 30 / 2 x 1 mL

Set includes the below two Cat. No.'s

#2 Diesel Fuel in n-Hexadecane	
25% w/w	D-5186-96-DLC-25X
50% w/w	D-5186-96-DLC-50X

Docosane

D-5186-91-PM-0.4X

\$ 20 / 1 x 1 mL

20% w/w in Toluene

▲ Hazardous fee required.

ASTM D5188 Vapor - Liquid Ratio Temperature Standards

Performance Check Samples for daily monitoring of instrument performance

Volume/Liquid Temp	Cat. No.	Price / Set
36.1°C (96.9°F)	ASTM-P-125-01-VAP	\$ 45 / 5 x 20 mL
68.0°C (155.7°F)	ASTM-P-125-02-VAP	45 / 5 x 20 mL

ASTM D5191 & D5482 Vapor Pressure Standards

Vapor Pressure Quality Control Samples

Vapor Pressure	Cat. No.	Price / Set
68.3kPa (9.91 psi)	ASTM-P-124-01-VAP	\$ 65 / 10 x 10 mL
68.0kPa (9.86 psi)	ASTM-P-124-02-VAP	90 / 10 x 10 mL
51.1kPa (7.41 psi)	ASTM-P-124-03-VAP	85 / 10 x 10 mL
46.7kPa (6.77 psi)	ASTM-P-124-04-VAP	129 / 10 x 10 mL
22.5kPa (3.26 psi)	ASTM-P-124-05-VAP	50 / 10 x 10 mL
7.1kPa (1.03 psi)	ASTM-P-124-06-VAP	50 / 10 x 10 mL

Technical Note

Consists of pure solvents with known vapor pressures.

Value Added PAK

Packaged in ready to use quantities.

ASTM D5307 Boiling Range Distribution of Crude Petroleum by GC

Quantitative Paraffins Standard

D-5307-QUANT \$ 60 / 1 x 2 mL
 D-5307-QUANT-PAK **SAVE 20%** \$ 240 / 5 x 2 mL
 Equal Wt. % 16 comps.

<i>n</i> -Decane	<i>n</i> -Octadecane
<i>n</i> -Undecane	<i>n</i> -Eicosane
<i>n</i> -Dodecane	<i>n</i> -Tetracosane
<i>n</i> -Tridecane	<i>n</i> -Octacosane
<i>n</i> -Tetradecane	<i>n</i> -Dotriacontane
<i>n</i> -Pentadecane	<i>n</i> -Hexatriacontane
<i>n</i> -Hexadecane	<i>n</i> -Tetracontane
<i>n</i> -Heptadecane	<i>n</i> -Tetratetracontane

Qualitative Paraffins Standard

D-5307-QUAL \$ 40 / 1 x 1 mL
 D-5307-QUAL-PAK **SAVE 20%** \$ 160 / 5 x 1 mL
 At stated approx. Wt. % 7 comps.

	Wt./Wt. %		Wt./Wt. %
Propane	10	<i>n</i> -Heptane	15
Butane	15	<i>n</i> -Octane	15
<i>n</i> -Pentane	15	<i>n</i> -Nonane	15
<i>n</i> -Hexane	15		

Column Resolution Mix

D-5307-CR \$ 15 / 1 x 1 mL
 D-5307-CR-PAK **SAVE 20%** \$ 60 / 5 x 1 mL
 At stated approx. Wt. % 3 comps.

	Wt./Wt. %		Wt./Wt. %
<i>n</i> -Hexadecane	1.0	<i>n</i> -Octane	98.0
<i>n</i> -Octadecane	1.0		

Internal Standard

D-5307-IS-10ML \$ 30 / 1 x 10 mL
 D-5307-IS-10ML-PAK **SAVE 20%** \$ 120 / 5 x 10 mL
 4 comps.

	Wt./Wt. %		Wt./Wt. %
<i>n</i> -Tetradecane	25	<i>n</i> -Hexadecane	25
<i>n</i> -Pentadecane	25	<i>n</i> -Heptadecane	25





ASTM D5441 Analysis of Methyl tert-butyl ether (MtBE) by GC

ASTM Committee D02 on Petroleum Products and Lubricants has issued the Standard Method D5441 for the determination of the purity of methyl tert-butyl ether (MtBE) by Gas Chromatography. This method provides a procedure to measure impurities in MtBE such as C₄ to C₁₂ olefins, methyl, isopropyl and tert-butyl alcohols, methyl sec-butyl and methyl tert-amyl ethers, acetone, and methyl ethyl ketones. The presence of these impurities in MtBE can have a direct effect upon the value of the MtBE as a gasoline additive. The following reference standards have been formulated to meet the method specifications. Different packaging sizes are available to meet various sample testing capacities.

MtBE Contaminant Standard

Low Concentration

D-5441		\$ 30 / 1 x 1 mL
D-5441-PAK	SAVE 20%	\$ 120 / 5 x 1 mL
D-5441-5ML		\$ 100 / 1 x 5 mL
D-5441-5ML-PAK	SAVE 20%	\$ 400 / 5 x 5 mL
0.1% Wt./Wt. each in MtBE		12 comps.

tert-Amyl methyl ether
tert-Butanol
tert-Butyl ethyl ether
4,4-Dimethyl-2-neopentyl-1-pentene
Methanol
2-Methylbutane
2-Methyl-2-butene
2,2',4,6,6'-Pentamethyl-3-heptene
Pentane
cis-2-Pentene
trans-2-Pentene
2,4,4-Trimethyl-1-pentene

MtBE Contaminant Standard

High Concentration

D-5441-10X		\$ 30 / 1 x 1 mL
D-5441-10X-PAK	SAVE 20%	\$ 120 / 5 x 1 mL
D-5441-10X-5ML		\$ 100 / 1 x 5 mL
D-5441-10X-5ML-PAK	SAVE 20%	\$ 400 / 5 x 5 mL
1% Wt./Wt. each in MtBE		12 comps.

tert-Amyl methyl ether
tert-Butanol
tert-Butyl ethyl ether
4,4-Dimethyl-2-neopentyl-1-pentene
Methanol
2-Methylbutane
2-Methyl-2-butene
2,2',4,6,6'-Pentamethyl-3-heptene
Pentane
cis-2-Pentene
trans-2-Pentene
2,4,4-Trimethyl-1-pentene

Qualitative Standard

D-5441-QUAL	\$ 145 / 1 x 1 mL
0.1% Wt./Wt. each in n-Dodecane	

Methanol	MtBE
Isobutylene	2,3-Dimethyl-1-butene
n-Butane	4-Methyl-cis-2-pentene
trans-2-butene	2-Methylpentane
cis-2-butene	Methylethyl ketone
3-Methyl-1-butene	3-Methylpentane
Acetone	sec-Butyl methyl ether
Isopentane	ETBE
2-Propanol	TAME
1-Pentene	3,5-Dimethyl-1-hexene
2-Methyl-1-butene	2,4,4-Trimethyl-1-pentene
n-Pentane	2,4,4-Trimethyl-2-pentene
trans-2-Pentene	3,4,4-Trimethyl-trans-2-pentene
t-Butanol	2,3,4-Trimethyl-2-pentene
cis-2-Pentene	4,4-Dimethyl-2-neopentyl-1-pentene
2-Methyl-2-butene	2,2',4,6,6'-Pentamethyl-3-heptene
Cyclopentene	

Quantitative Standard

D-5441-QUANT-R1	\$ 130 / 1 x 1 mL
0.1% Wt./Wt. each in n-Dodecane	

Methanol (0.04 Wt/Wt)	2-Methylpentane
3-Methyl-1-butene	Methyl ethyl ketone
Acetone	3-Methylpentane
Isopentane	sec-Butyl methyl ether
2-Propanol	Ethyl tert-butyl ether
1-Pentene	TAME
2-Methyl-1-butene	3,5-Dimethyl-1-hexene
n-Pentane	2,4,4-Trimethyl-1-pentene
trans-2-Pentene	2,4,4-Trimethyl-2-pentene
t-Butanol	3,4,4-Trimethyl-trans-2-pentene
cis-2-Pentene	2,3,4-Trimethyl-2-pentene
2-Methyl-2-butene	4,4-Dimethyl-2-neopentyl-1-pentene
Cyclopentene	2,2',4,6,6'-Pentamethyl-3-heptene
MtBE	
2,3-Dimethyl-1-butene	
4-Methyl-cis-2-pentene	

MtBE Resolution Test Mix

D-5441-RES		\$ 20 / 1 x 1 mL
D-5441-RES-PAK	SAVE 20%	\$ 80 / 5 x 1 mL
D-5441-RES-5ML		\$ 60 / 1 x 5 mL
D-5441-RES-5ML-PAK	SAVE 20%	\$ 240 / 5 x 5 mL
1% Wt./Wt. each in MtBE		3 comps.

trans-2-Pentene cis-Pentene
tert-Butanol



AccuStandard is an active member in ASTM and strives to keep abreast of ASTM method revisions. If our listed formulation does not meet the most recent method revision, please contact Technical Support, for an updated product.

ASTM D5442 Analysis of Petroleum Waxes by GC

Quantitative Wax Standard

D-5442 \$ 25 / 1 x 1 mL
D-5442-PAK **SAVE 20%** \$ 100 / 5 x 1 mL
 At stated Wt. % in Cyclohexane 16 comps.

Wt./Wt. %		Wt./Wt.	
<i>n</i> -Dodecane	0.02	<i>n</i> -Octacosane	0.12
<i>n</i> -Tetradecane	0.03	<i>n</i> -Triacontane	0.10
<i>n</i> -Hexadecane	0.04	<i>n</i> -Dotriacontane	0.08
<i>n</i> -Octadecane	0.05	<i>n</i> -Hexatriacontane	0.06
<i>n</i> -Eicosane	0.06	<i>n</i> -Tetracontane	0.05
<i>n</i> -Docosane	0.08	<i>n</i> -Tetratetracontane	0.04
<i>n</i> -Tetracosane	0.10	<i>n</i> -Pentacontane	0.03
<i>n</i> -Hexacosane	0.12	<i>n</i> -Hexacontane	0.02

Column Resolution Standard

D-5442-CR-PAK \$ 40 / 5 x 1 mL
 At stated Wt. % in Cyclohexane 2 comps.

Wt./Wt. %	
<i>n</i> -Eicosane	0.05
<i>n</i> -Tetracontane	0.05

Hydrocarbon Standard Brownfield Regulation

D-5442-R1 \$ 60 / 1 x 1 mL
 100 µg/mL each in Cyclohexane 18 comps.

<i>n</i> -Decane	<i>n</i> -Octacosane
<i>n</i> -Dodecane	<i>n</i> -Triacontane
<i>n</i> -Tetradecane	<i>n</i> -Dotriacontane
<i>n</i> -Hexadecane	<i>n</i> -Tetracontane
<i>n</i> -Octadecane	<i>n</i> -Hexatriacontane
<i>n</i> -Eicosane	<i>n</i> -Octatriacontane
<i>n</i> -Docosane	<i>n</i> -Tetracontane
<i>n</i> -Tetracosane	<i>n</i> -Tetratetracontane
<i>n</i> -Hexacosane	<i>n</i> -Pentacontane

Retention Time Standard Mix 1

D-5442-RT1 \$ 50 / 500 mg
 Equal parts by weight 12 comps.

<i>n</i> -Hexadecane (c16)	<i>n</i> -Octacosane (c28)
<i>n</i> -Octadecane (c18)	<i>n</i> -Triacontane (c30)
<i>n</i> -Eicosane (c20)	<i>n</i> -Dotriacontane (c32)
<i>n</i> -Docosane (c22)	<i>n</i> -Hexatriacontane (c36)
<i>n</i> -Tetracosane (c24)	<i>n</i> -Tetracontane (c40)
<i>n</i> -Hexacosane (c26)	<i>n</i> -Tetratetracontane (c44)

Retention Time Standard Mix 2

D-5442-RT2 \$ 55 / 500 mg
 Equal parts by weight 16 comps.

<i>n</i> -Dodecane (c12)	<i>n</i> -Octacosane (c28)
<i>n</i> -Tetradecane (c14)	<i>n</i> -Triacontane (c30)
<i>n</i> -Hexadecane (c16)	<i>n</i> -Dotriacontane (c32)
<i>n</i> -Octadecane (c18)	<i>n</i> -Hexatriacontane (c36)
<i>n</i> -Eicosane (c20)	<i>n</i> -Tetracontane (c40)
<i>n</i> -Docosane (c22)	<i>n</i> -Tetratetracontane (c44)
<i>n</i> -Tetracosane (c24)	<i>n</i> -Pentacontane (c50)
<i>n</i> -Hexacosane (c26)	<i>n</i> -Hexacontane (c60)

Standards of Interest

See ASTM Methods D3710, D5307, and D6352 for additional calibration standards for hydrocarbon analysis.

ASTM D5443 Paraffin, Naphthene and Aromatic Hydrocarbon Type Analysis in Petroleum Distillates through 200°C by Multi-dimensional GC

Hydrocarbon Test Mixture

D-5443-93-HTM \$ 100 / 1 x 1 mL
 At stated Wt. % 28 comps.

Wt./Wt. %		Wt./Wt. %		Wt./Wt. %	
Cyclopentane	1.00	1cis,2-Dimethylcyclohexane	5.00	<i>trans</i> -Decahydronaphthelene	4.25
<i>n</i> -Pentane	1.00	Isooctane	5.00	<i>n</i> -Tetradecane	4.50
Cyclohexane	2.00	<i>n</i> -Octane	5.00	Ethylbenzene	4.50
2,3-Dimethylbutane	2.00	1cis,2 cis,4-Trimethylcyclohexane	4.25	<i>o</i> -Xylene	4.25
<i>n</i> -Hexane	2.00	<i>n</i> -Nonane	4.50	<i>n</i> -Propylbenzene	5.00
<i>n</i> -Hexene	1.50	<i>n</i> -Decane	4.25	1,2,4-Trimethylbenzene	4.50
Methylcyclohexane	4.25	<i>n</i> -Undecane	3.50	1,2,3-Trimethylbenzene	5.00
4-Methyl-1-hexene	1.50	<i>n</i> -Dodecane	3.25	1,2,4,5-Tetramethylbenzene	5.00
<i>n</i> -Heptane	3.50	Benzene	2.25	Pentamethylbenzene	5.00
		Toluene	2.25		

ASTM D5453 Total Sulfur in Light Hydrocarbons, Motor Fuels and Oils by Ultraviolet Fluorescence

Low Level Sulfur Set

D-5453-LL-SET \$ 90 / 5 x 2 mL
 Contains the following 5 standards in Isooctane

Description	Unit
Sulfur Blank	2 mL
Sulfur @ 0.5 ng/µL	2 mL
Sulfur @ 2.5 ng/µL	2 mL
Sulfur @ 5.0 ng/µL	2 mL
Sulfur @ 10.0 ng/µL	2 mL

Mid Level Sulfur Set

D-5453-ML-SET \$ 90 / 6 x 2 mL
 Contains the following 5 standards in Isooctane

Description	Unit
Sulfur Blank	2 mL
Sulfur @ 5.0 ng/µL	2 mL
Sulfur @ 25 ng/µL	2 mL
Sulfur @ 50 ng/µL	2 mL
Sulfur @ 100 ng/µL	2 mL
Sulfur @ 200 ng/µL	2 mL

High Level Sulfur Set

D-5453-HL-SET \$ 90 / 5 x 2 mL
 Contains the following 5 standards in Isooctane

Description	Unit
Sulfur Blank	2 mL
Sulfur @ 100 ng/µL	2 mL
Sulfur @ 250 ng/µL	2 mL
Sulfur @ 500 ng/µL	2 mL
Sulfur @ 1000 ng/µL	2 mL

Standards of Interest

ASTM Method D5453 Sulfur as Di-*n*-butyl sulfide in Biodiesel see ASTM D6751.

Real World Sulfur in Various Gasoline & Fuels QC Samples

SBPT-LSGAS-VAP \$ 25 / 2 x 15 mL

Parameter	Method	Approx .Range
Sulfur	D-5453-00	0 - 50 µg/g

As the matrix may contain some native sulfur, AccuStandard encourages purchasing sulfur blanks for calibration analysis

ASTM D5480 Engine Oil Volatility by GC

Stock Column Resolution Standard

D-5480-CR-PAK \$ 40 / 5 x 1 mL
 10 µg/mL each in Carbon disulfide 5 comps.
D-5480-CR-100X-PAK \$ 50 / 5 x 1 mL
 1000 µg/mL each in Carbon disulfide 5 comps.

n-Decane *n*-Octadecane
n-Dodecane *n*-Tetracosane
n-Hexadecane



Carbon disulfide can not ship by air. When possible alternate solvents can be used. Please contact our Technical Service Department for other options.

Tetracosane (Solution A)

D-5480-C40-5ML \$ 15 / 1 x 5 mL
D-5480-C40-5ML-PAK SAVE 20% \$ 60 / 5 x 5 mL
 500 µg/mL in Carbon disulfide
D-5480-C40-R1-5ML \$ 15 / 1 x 5 mL
D-5480-C40-R1-5ML-PAK SAVE 20% \$ 60 / 5 x 5 mL
 500 µg/mL in Chloroform

n-Tetracosane

Internal Standard Solution

D-5480-IS-5ML \$ 30 / 1 x 5 mL
D-5480-IS-5ML-PAK SAVE 20% \$ 120 / 5 x 5 mL
 Each comp. at equal weights 3 comps.

n-Decane *n*-Dodecane
n-Undecane

ASTM D5482 & D5191 Vapor Pressure Standards

Vapor Pressure Quality Control Samples

Vapor Pressure	Cat. No	Price / Set of 10
68.3kPa (9.91 psi)	ASTM-P-124-01	\$ 65 / 10 x 10 mL
68.0kPa (9.86 psi)	ASTM-P-124-02	75 / 10 x 10 mL
51.1kPa (7.41 psi)	ASTM-P-124-03	70 / 10 x 10 mL
46.7kPa (6.77 psi)	ASTM-P-124-04	125 / 10 x 10 mL
22.5kPa (3.26 psi)	ASTM-P-124-05	50 / 10 x 10 mL
7.1kPa (1.03 psi)	ASTM-P-124-06	50 / 10 x 10 mL

ASTM D5501 Ethanol Content of Denatured Fuel Ethanol by GC

Denatured Fuel Ethanol Calibration Set

D-5501-94-SET \$ 75 / 7 x 1 mL

Comp.1	Wt./ Wt.%	Comp.2	Wt./ Wt.%	Comp.3	Wt./ Wt.%	Unit
Ethanol	92	Methanol	0.6	Heptane	7.4	1 mL
Ethanol	93	Methanol	0.5	Heptane	6.5	1 mL
Ethanol	94	Methanol	0.4	Heptane	5.6	1 mL
Ethanol	95	Methanol	0.3	Heptane	4.7	1 mL
Ethanol	96	Methanol	0.2	Heptane	3.8	1 mL
Ethanol	97	Methanol	0.1	Heptane	2.9	1 mL
Ethanol	98	Methanol	0.05	Heptane	1.95	1 mL

Technical Note

Additional Oxygenate calibration, check standards, and independent reference standards can be found in ASTM method D4815 or D5622. The required QA/QC procedures in EPA methods stipulate a calibration check standard be used once per analytical batch or per 10 sample set. AccuStandard has bulk packaged check standards to meet this increased usage.



ASTM D5580 Benzene, Toluene, Ethylbenzene, m/p-Xylene, o-Xylene, C9 & Heavier Aromatics & Total Aromatics in Finished Gasoline by GC

Aromatics Quantitative Calibration Mixes

Without Internal Standard

D-5580-95-CAL-10ML-SET

\$ 300 / 5 x 10 mL (of 6 component mix)

Analyte	Calibration range	Std. 1 Wt. %	Std. 2 Wt. %	Std. 3 Wt. %	Std. 4 Wt. %	Std. 5 Wt. %
Benzene	0.10 - 5.00	0.10	0.50	1.00	2.00	5.00
Toluene	1.00 - 15.00	15.00	10.00	5.00	2.50	1.00
Ethylbenzene	0.50 - 10.00	0.50	1.00	2.50	5.00	10.00
o-Xylene	0.50 - 10.00	1.00	2.50	10.00	5.00	0.50
1,2,4-Trimethylbenzene	0.50 - 10.00	1.00	10.00	0.50	5.00	2.50
Isooctane		82.40	76.00	81.00	80.50	81.00

With Internal Standard

D-5580-95-CAL-IS-SET

\$ 100 / 5 x 1 mL (of 7 component mix)

Analyte	Calibration range	Std. 1 Wt. %	Std. 2 Wt. %	Std. 3 Wt. %	Std. 4 Wt. %	Std. 5 Wt. %
Benzene	0.09 - 4.50	0.09	0.45	0.90	1.80	4.50
Toluene	0.90 - 13.50	13.50	9.00	4.50	2.25	0.90
Ethylbenzene	0.45 - 9.00	0.45	0.90	2.25	4.50	9.00
o-Xylene	0.45 - 9.00	0.90	2.25	9.00	4.50	0.45
1,2,4-Trimethylbenzene	0.45 - 9.00	0.90	9.00	0.45	4.50	2.25
2-Hexanone (Internal Standard)		10.00	10.00	10.00	10.00	10.00
Isooctane		74.16	68.40	72.90	72.45	72.90

Standard 2 D-5580-95-CAL-IS-2 \$ 25 / 1 mL

Valve Timing Calibration Mixes

With Internal Standard

M-GRA-VT/IS-AS \$ 25 / 1 x 1 mL

M-GRA-VT/IS-AS-PAK **SAVE 20%** \$ 100 / 5 x 1 mL

Each at stated conc. 6 comps.

Wt./Wt. %

Benzene	4.5
Toluene	4.5
Ethylbenzene	9.0
o-Xylene	9.0
2-Hexanone (Internal Std.)	10.0
Isooctane	63.0

Without Internal Standard

M-GRA-VT-AS-10ML \$ 100 / 1 x 10 mL

M-GRA-VT-AS-10ML-PAK **SAVE 20%** \$ 400 / 5 x 10 mL

Each at stated conc. 5 comps.

Wt./Wt. %

Benzene	5.0
Toluene	5.0
Ethylbenzene	10.0
o-Xylene	10.0
Isooctane	70.0

Daily Quality Control Standard

Without Internal Standard

D-5580-QC-R1-10ML \$ 125 / 1 x 10 mL

D-5580-QC-R1-10ML-PAK **SAVE 20%** \$ 500 / 5 x 10 mL

14 comps.

Wt./Wt. %		Wt./Wt. %	
n-Hexane	12	Toluene	9
n-Heptane	20	Ethylbenzene	2
n-Octane	15	p-Xylene	3
n-Decane	10	o-Xylene	2
n-Dodecane	1	1,2,4-Trimethylbenzene	3
Isooctane	20	1,2,4,5-Tetramethylbenzene	1
Benzene	1	Naphthalene	1

Internal Standard

M-GRA-IS-AS-5ML \$ 20 / 1 x 5 mL

M-GRA-IS-AS-5ML-PAK **SAVE 20%** \$ 80 / 5 x 5 mL

2-Hexanone (Neat)

Selectivity Check Standard

M-GRA-SCS-AS \$ 10 / 1 x 1 mL

M-GRA-SCS-AS-PAK **SAVE 20%** \$ 40 / 5 x 1 mL

Each at stated conc. 2 comps.

Wt./Wt. %

n-Dodecane	1.5
Isooctane	98.5

Daily Quality Control Standard

Without Internal Standard

D-5580-QC-10ML \$ 125 / 1 x 10 mL

D-5580-QC-10ML-PAK **SAVE 20%** \$ 500 / 5 x 10 mL

14 comps.

Wt./Wt. %		Wt./Wt. %	
n-Hexane	12	Toluene	9
n-Heptane	20	Ethylbenzene	2
n-Octane	15	p-Xylene	3
n-Decane	10	o-Xylene	2
n-Tridecane	1	1,2,4-Trimethylbenzene	3
Isooctane	20	1,2,4,5-Tetramethylbenzene	1
Benzene	1	Naphthalene	1

Technical Note

The configuration of the instrument valve time switching and the pre-column incorporated determines which QA/QC standard provides optimum performance when analyzing gasoline samples by Method D5580. Use of the D5580 standards in conjunction with the real world gasoline standards can provide added assurance that the analytical results generated are reproducible and the analytical system is performing to method specifications.

ASTM D5599 Oxygenates in Gas by GC & O-FID

Oxygenates Calibration Curves

With Internal Standard

M-GRO-CAL/IS-SET

\$ 250 / 8 x 1 mL

M-GRO-CAL/IS-SET-PAK

SAVE 20% \$ 1,000 / 5 x (8 x 1) mL

of 15 Comp. Mix

Calibration range	Std. 1 Wt. %	Std. 2 Wt. %	Std. 3 Wt. %	Std. 4 Wt. %	Std. 5 Wt. %	Std. 6 Wt. %	Std. 7 Wt. %	Std. 8 Wt. %	
Methanol	0.1 - 5.0	---	0.1	2.5	---	5	0.5	1	---
Ethanol	1.0 - 12.0	12	---	3	---	8	5	1	---
Isopropanol	0.1 - 2.0	2	1	---	0.1	0.3	---	0.5	---
t-Butanol	0.1 - 2.0	0.5	0.1	1	---	2	0.3	---	---
Propanol	0.2 - 2.0	2	---	0.7	0.2	1	---	0.4	---
MtBE	1.0 - 17.0	5	17	---	---	1	2.5	10	---
sec-Butanol	0.1 - 2.5	1	---	0.5	0.1	---	2.5	0.7	---
Diisopropyl ether	0.1 - 2.0	---	0.5	0.3	0.1	2	1	---	---
iso-Butanol	0.1 - 2.0	2	0.5	---	1	0.1	0.3	---	---
EtBE	1.0 - 18.0	---	3.5	18	7.5	---	1	12	---
t-Pentanol	0.1 - 2.0	0.3	1	---	0.5	0.1	2	---	---
Butanol	0.1 - 2.0	1	---	0.3	---	0.5	0.1	2	---
TAME	1.0 - 18.0	---	3.5	1	18	7.5	12	---	---
1,2-Dimethoxyethane (ISTD)		4	4	4	4	4	4	4	---
RFA Gasoline		70.2	68.8	68.7	68.5	68.5	68.8	68.4	100
Total oxygenates and ISTD		29.8	31.2	31.3	31.5	31.5	31.2	31.6	0

Technical Note

This certified oxygenate calibration curve can be used in combination with other aromatic standards for combined oxygenate/aromatic analysis, to change the amount of internal standard added, or to incorporate alternative internal standard analytes.

With Internal Standard


M-GRO-CAL/IS-R1-SET

\$ 250 / 8 x 1 mL

M-GRO-CAL/IS	Analyte	01-R1 Wt. %	02-R1 Wt. %	03-R1 Wt. %	04-R1 Wt. %	05-R1 Wt. %	06-R1 Wt. %	07-R1 Wt. %	08-R1 Wt. %
	Calibration range								
Methanol	0.1 - 5.0	--	0.1	2.5	--	5	0.5	1	--
Ethanol	1.0 - 12.0	12	--	3	--	8	5	1	--
Isopropanol	0.1 - 2.0	2	1	--	0.1	0.3	--	0.5	--
t-Butanol	0.1 - 2.0	0.5	0.1	1	--	2	0.3	--	--
Propanol	0.2 - 2.0	2	--	0.7	0.2	1	--	0.4	--
MtBE	1.0 - 17.0	5	17	--	--	1	2.5	10	--
sec-Butanol	0.1 - 2.5	1	--	0.5	0.1	--	2.5	0.7	--
Diisopropyl ether	0.1 - 2.0	--	0.5	0.3	0.1	2	1	--	--
Isobutanol	0.1 - 2.0	2	0.5	--	1	0.1	0.3	--	--
EtBE	1.0 - 18.0	--	3.5	18	7.5	--	1	12	--
tert-Pentanol	0.1 - 2.0	0.3	1	--	0.5	0.1	2	--	--
Butanol	0.1 - 2.0	1	--	0.3	--	0.5	0.1	2	--
TAME	1.0 - 18.0	--	3.5	1	18	7.5	12	--	--
1,2-Dimethoxyethane (ISTD)		4	4	4	4	4	4	4	--
RFA Gasoline		74.2	72.8	72.7	72.5	72.5	72.8	72.4	100
Total oxygenates and ISTD		28.6	30.0	30.1	30.3	30.3	30.0	30.4	0

Technical Note

The revised Set formulates the product components and gasoline to 100 mL volume and then adds the Internal Standard for a total volume of 104 mL.



Without Internal Standard

M-GRO-CAL-SET

\$ 850 / 8 x 10 mL

of 14 Comp. Mix

Calibration range	Std. 1 Wt. %	Std. 2 Wt. %	Std. 3 Wt. %	Std. 4 Wt. %	Std. 5 Wt. %	Std. 6 Wt. %	Std. 7 Wt. %	Std. 8 Wt. %	
Methanol	0.1 - 5.0	---	0.1	2.5	---	5	0.5	1	---
Ethanol	1.0 - 12.0	12	---	3	---	8	5	1	---
Isopropanol	0.1 - 2.0	2	1	---	0.1	0.3	---	0.5	---
t-Butanol	0.1 - 2.0	0.5	0.1	1	---	2	0.3	---	---
Propanol	0.2 - 2.0	2	---	0.7	0.2	1	---	0.4	---
MtBE	1.0 - 17.0	5	17	---	---	1	2.5	10	---
sec-Butanol	0.1 - 2.5	1	---	0.5	0.1	---	2.5	0.7	---
Diisopropyl ether	0.1 - 2.0	---	0.5	0.3	0.1	2	1	---	---
iso-Butanol	0.1 - 2.0	2	0.5	---	1	0.1	0.3	---	---
EtBE	1.0 - 18.0	---	3.5	18	7.5	---	1	12	---
t-Pentanol	0.1 - 2.0	0.3	1	---	0.5	0.1	2	---	---
Butanol	0.1 - 2.0	1	---	0.3	---	0.5	0.1	2	---
TAME	1.0 - 18.0	---	3.5	1	18	7.5	12	---	---
RFA Gasoline		74.2	72.8	72.7	72.5	72.5	72.8	72.4	100
Total oxygenates		25.8	27.2	27.3	27.5	27.5	27.2	27.6	0

ASTM D5599 (Continued) Oxygenates in Gas by GC & O-FID

Daily QC Standard

Without Internal Standard

M-GRO-QC-10ML \$ 100 / 1 x 10 mL
 M-GRO-QC-10ML-PAK **SAVE 20%** \$ 400 / 5 x 10 mL
 14 comps.


Oxygenate	Target Wt. %	Compound Oxygenate	Target Wt. %
Methanol	1	<i>Di</i> -isopropyl ether	3
Ethanol	1	iso-Butanol	1
Isopropanol	1	EtBE	3
<i>t</i> -Butanol	1	<i>t</i> -Pentanol	1
Propanol	1	Butanol	1
MtBE	3	TAME	3
<i>sec</i> -Butanol	1	RFA Gasoline	79

Revised Daily QC Standard

Without Internal Standard

M-GRO-QC-R-10ML \$ 100 / 1 x 10 mL
 M-GRO-QC-R-10ML-PAK **SAVE 20%** \$ 400 / 5 x 10 mL
 14 comps.

Oxygenate	Target Wt. %	Oxygenate	Target Wt. %
Methanol	1	<i>Di</i> -isopropyl ether	1
Ethanol	1	iso-Butanol	1
Isopropanol	1	EtBE	3
<i>t</i> -Butanol	1	<i>t</i> -Pentanol	1
Propanol	1	Butanol	1
MtBE	3	TAME	3
<i>sec</i> -Butanol	1	RFA Gasoline	81



Technical Note

Additional Oxygenate calibration, check standards, and independent reference standards can be found in ASTM method D4815 or D5622. The required QA/QC procedures in EPA methods stipulate a calibration check standard be used once per analytical batch or per 10 sample set. AccuStandard has bulk packaged check standards to meet this increased usage.

Daily QC Standard

With Internal Standard

M-GRO-QC/IS-5ML \$ 75 / 1 x 5 mL
 M-GRO-QC/IS-5ML-PAK **SAVE 20%** \$ 300 / 5 x 5 mL
 Internal Standard 1,2-Dimethoxyethane is 15 comps.
 combined in a 4 to 100 weight ratio.

Oxygenate	Target Wt. %	Oxygenate	Target Wt. %
Methanol	1	<i>Di</i> -isopropyl ether	3
Ethanol	1	iso-Butanol	1
Isopropanol	1	EtBE	3
<i>t</i> -Butanol	1	<i>t</i> -Pentanol	1
Propanol	1	Butanol	1
MtBE	3	TAME	3
<i>sec</i> -Butanol	1	RFA Gasoline	79

Revised Daily QC Standard

With Internal Standard

M-GRO-QC-R/IS-5ML \$ 75 / 1 x 5 mL
 M-GRO-QC-R/IS-5ML-PAK **SAVE 20%** \$ 300 / 5 x 5 mL
 Internal Standard 1,2-Dimethoxyethane is 15 comps.
 combined in a 4 to 100 weight ratio.

Oxygenate	Target Wt. %	Oxygenate	Target Wt. %
Methanol	1	<i>Di</i> -isopropyl ether	1
Ethanol	1	iso-Butanol	1
Isopropanol	1	EtBE	3
<i>t</i> -Butanol	1	<i>t</i> -Pentanol	1
Propanol	1	Butanol	1
MtBE	3	TAME	3
<i>sec</i> -Butanol	1	RFA Gasoline	81

Gasoline Refinery Blank

With Internal Standard

M-GRO-BLNK/IS-10ML \$ 15 / 1 x 10 mL
 M-GRO-BLNK/IS-10ML-PAK **SAVE 20%** \$ 60 / 5 x 10 mL
 2 comps.

	Wt. %
1,2-Dimethoxyethane (ISTD)	4
RFA Gasoline	96

O-FID/EPA Gasoline Refinery

Internal Standard

M-GRO-IS-5ML \$ 10 / 1 x 5 mL
 M-GRO-IS-5ML-PAK **SAVE 20%** \$ 40 / 5 x 5 mL
 1,2-Dimethoxyethane (Internal Standard)

O-FID Gasoline Refinery Blank

RFA-BLNK-10ML \$ 10 / 1 x 10 mL
 RFA-BLNK-10ML-PAK **SAVE 20%** \$ 40 / 5 x 10 mL

RFA Gasoline (neat)



ASTM D5599 EPA Gasoline Refinery Oxygenates Calibration Curves

EPA O-FID Quantitative Calibration Mixes

Without Internal Standard

M-GRO-CAL-EPA-10ML-SET

\$ 350 / 5 x 10 mL

5 comps.

	Calibr. range	Std. 1 Wt. %	Std. 2 Wt. %	Std. 3 Wt. %	Std. 4 Wt. %	Std. 5 Wt. %
Methanol	0.30 - 12.00	6.00	12.00	3.00	0.30	9.00
Ethanol	0.30 - 12.00	0.30	3.00	6.00	9.00	12.00
<i>t</i> -Butanol	0.30 - 12.00	0.30	6.00	9.00	12.00	3.00
MtBE	0.30 - 15.00	15.00	7.50	11.25	3.75	0.30
RFA Gasoline		78.40	71.50	70.75	74.95	75.70

With Internal Standard

M-GRO-CAL-IS/EPA-SET

\$ 175 / 5 x 1 mL

6 comps.

	Calibr. range	Std. 1 Wt. %	Std. 2 Wt. %	Std. 3 Wt. %	Std. 4 Wt. %	Std. 5 Wt. %
Methanol	0.29 - 11.40	5.70	11.40	2.85	0.29	8.55
Ethanol	0.29 - 11.40	0.29	2.85	5.70	8.55	11.40
<i>t</i> -Butanol	0.29 - 11.40	0.29	5.70	8.55	11.40	2.85
MtBE	0.29 - 14.29	14.25	7.13	10.69	3.56	0.29
1,2-Dimethoxyethane (ISTD)		5.00	5.00	5.00	5.00	5.00
RFA Gasoline		74.48	67.93	67.31	71.20	71.92

Technical Note

EPA O-FID Oxygenate Petrochemical Standards

This second oxygenate version has been formulated to meet the specific analyte requirements of the EPA methodology.

EPA O-FID Quantitative Calibration Check Standard

Without Internal Standard

M-GRO-EPA-CC-10ML

\$ 50 / 1 x 10 mL

M-GRO-EPA-CC-10ML-PAK **SAVE 20%** \$ 200 / 5 x 10 mL

5 comps.

	Wt./Wt. %		Wt./Wt. %
Methanol	4.0	Methyl <i>tert</i> -butyl ether	12.0
Ethanol	8.0	RFA gasoline	71.0
<i>tert</i> -Butanol	5.0		

EPA O-FID Quantitative Calibration Check Standard

With Internal Standard

M-GRO-EPACC/IS-5ML

\$ 35 / 1 x 5 mL

M-GRO-EPACC/IS-5ML-PAK **SAVE 20%** \$ 150 / 5 x 5 mL

6 comps.

	Wt./Wt. %		Wt./Wt. %
Methanol	3.80	Methyl <i>tert</i> -butyl ether	11.40
Ethanol	7.60	RFA gasoline	67.45
<i>tert</i> -Butanol	4.75	DME (Internal Standard)	5.0

Technical Note

Additional Oxygenate calibration, check standards, and independent reference standards can be found in ASTM method D4815 or D5622. The required QA/QC procedures in EPA methods stipulate a calibration check standard be used once per analytical batch or per 10 sample set. AccuStandard has bulk packaged check standards to meet this increased usage.

EPA O-FID Spiking Solution

M-GRO-EPA-SP-5ML

\$ 50 / 1 x 5 mL

M-GRO-EPA-SP-5ML-PAK **SAVE 20%** \$ 200 / 5 x 5 mL

4 comps.

	Wt./Wt. %		Wt./Wt. %
Methanol	14.3	<i>tert</i> -Butanol	14.3
Ethanol	28.6	Methyl <i>tert</i> -butyl ether	42.8

Oxygenate Free Gasoline Refinery Blank

RFA-BLNK-10ML

\$ 10 / 1 x 10 mL

RFA-BLNK-10ML-PAK **SAVE 20%** \$ 40 / 5 x 10 mL

RFA Gasoline (neat)

Internal Standard

M-GRO-IS-5ML

\$ 10 / 1 x 10 mL

M-GRO-IS-5ML-PAK **SAVE 20%** \$ 40 / 5 x 10 mL

1,2-Dimethoxyethane (Internal Standard)

ASTM D5600 Trace Metals in Petroleum Coke by ICP-AES

see page 392

ASTM D5622 Total Oxygen in Gasoline & MeOH Fuels by Reductive Pyrolysis

Description (2 x 10 mL, plus an RFA gasoline blank)	Oxygenate Wt. %	Cat. No.	Price / Unit
Ethanol in Oxygenate free RFA gasoline	5.0	ASTM-P-0061-SET	\$ 50 / 3 x 10 mL
Ethanol in Oxygenate free RFA gasoline	10.0	ASTM-P-0062-SET	50 / 3 x 10 mL
t-Amyl methyl ether in Oxygenate free RFA gasoline	10.0	ASTM-P-0063-SET	50 / 3 x 10 mL
t-Amyl methyl ether in Oxygenate free RFA gasoline	15.0	ASTM-P-0064-SET	50 / 3 x 10 mL
Ethyl t-butyl ether in Oxygenate free RFA gasoline	10.0	ASTM-P-0065-SET	50 / 3 x 10 mL
Ethyl t-butyl ether in Oxygenate free RFA gasoline	15.0	ASTM-P-0066-SET	50 / 3 x 10 mL
Methyl t-butyl ether in Oxygenate free RFA gasoline	10.0	ASTM-P-0067-SET	50 / 3 x 10 mL
Methyl t-butyl ether in Oxygenate free RFA gasoline	15.0	ASTM-P-0068-SET	50 / 3 x 10 mL
Methanol & t-Butanol in Oxygenate free RFA gasoline	10.0 & 5.0	ASTM-P-0069-SET	50 / 3 x 10 mL

Technical Note

All oxygenate blends come with a certificate to maintain traceability links to NIST SRMs (when available). The 10 mL size eliminates the need for special packaging and hazardous material fees.

Oxygenate Free Gasoline Refinery Blank

RFA-BLNK-10ML \$ 10 / 1 x 10 mL

RFA Gasoline (neat)

ASTM D5623 Sulfur Compounds in Light Petroleum Liquids by GC & Sulfur Selective Detection

ASTM-P-0091-10X-SET \$ 625 / set of 22 x 1 mL

Approx. 2.0 mg/mL each in Toluene

Compound	Cat. No.	Price / 1 mL
Hydrogen sulfide	ASTM-P-0091-01-10X	\$ 35
Carbonyl sulfide (Carbon oxysulfide)	ASTM-P-0091-02-10X	35
Methyl mercaptan (Methanethiol)	ASTM-P-0091-03-10X	35
Ethyl mercaptan (Ethanethiol)	ASTM-P-0091-04-10X	35
Methyl sulfide (Dimethyl sulfide)	ASTM-P-0091-05-10X	35
Carbon disulfide	ASTM-P-0091-06-10X	35
2-Propanethiol (Isopropyl mercaptan)	ASTM-P-0091-07-10X	35
2-Methyl-2-propanethiol (t-butyl mercaptan)	ASTM-P-0091-08-10X	35
1-Propanethiol (Propyl mercaptan)	ASTM-P-0091-09-10X	35
Ethyl methyl sulfide	ASTM-P-0091-10-10X	35
1-Methyl-1-propanethiol (2-butanethiol)	ASTM-P-0091-11-10X	35
Thiophene	ASTM-P-0091-12-10X	35
2-Methyl-1-propanethiol (Isobutyl mercaptan)	ASTM-P-0091-13-10X	35
Diethyl sulfide	ASTM-P-0091-14-10X	35
1-Butanethiol (Butyl mercaptan)	ASTM-P-0091-15-10X	35
Methyl disulfide (Dimethyl disulfide)	ASTM-P-0091-16-10X	35
2-Methylthiophene	ASTM-P-0091-17-10X	35
3-Methylthiophene	ASTM-P-0091-18-10X	35
Diethyl disulfide (Ethyl disulfide)	ASTM-P-0091-19-10X	35
3-Methylbenzo[b]thiophene	ASTM-P-0091-20-10X	35
5-Methylbenzo[b]thiophene	ASTM-P-0091-21-10X	75
Diphenyl sulfide	ASTM-P-0091-22-10X	35

Technical Note

This set of qualitative Sulfur Standards is formulated for research evaluation of the presence of the sulfur analytes or their breakdown products.

ASTM D5708 Nickel, Vanadium, & Iron in Crude Oils & Residual Fuels by ICP-AES

see page 401

ASTM D5762 Nitrogen in Petroleum & Petroleum Products by Boat-Inlet Chemiluminescence

Nitrogen Calibration Set

D-5762-95-CAL-SET \$ 75 / 6 x 1 mL

Nitrogen introduced using Acridine

Description	Cat. No.	Price / 1 mL
Xylene Blank	D-5762-95-BL	\$ 10
Nitrogen @ 1.0 µg/mL in Xylene	D-5762-95-1X	15
Nitrogen @ 5.0 µg/mL in Xylene	D-5762-95-5X	15
Nitrogen @ 10 µg/mL in Xylene	D-5762-95-10X	15
Nitrogen @ 50 µg/mL in Xylene	D-5762-95-50X	15
Nitrogen @ 100 µg/mL in Xylene	D-5762-95-100X	15

Low Level Nitrogen & Sulfur Calibration Set

ASTM-P-0071-SET \$ 50 / 4 x 1 mL

The Nitrogen is introduced using Aniline, the Sulfur is introduced using di-n-butyl sulfide

Description	Cat. No. (1 mL)
Benzene Blank	ASTM-P-0071-BL
Nitrogen @ 0.25 µg/g & Sulfur @ 0.25 µg/g in Benzene	ASTM-P-0071-01
Nitrogen @ 0.50 µg/g & Sulfur @ 0.50 µg/g in Benzene	ASTM-P-0071-02
Nitrogen @ 1.00 µg/g & Sulfur @ 1.00 µg/g in Benzene	ASTM-P-0071-03

Nitrogen Calibration Set - Low Level

ASTM-P-0070-SET \$ 75 / 6 x 1 mL

Nitrogen introduced using Aniline

Description	Cat. No. (1 mL)
Isooctane Blank	ASTM-P-0070-BL
Nitrogen @ 0.5 µg/g in Isooctane	ASTM-P-0070-1X
Nitrogen @ 1.0 µg/g in Isooctane	ASTM-P-0070-2X
Nitrogen @ 2.0 µg/g in Isooctane	ASTM-P-0070-4X
Nitrogen @ 5.0 µg/g in Isooctane	ASTM-P-0070-10X
Nitrogen @ 10.0 µg/g in Isooctane	ASTM-P-0070-20X

Stock Nitrogen Standard

D-5762-95-500X-PAK \$ 60 / 5 x 1 mL

Nitrogen @ 500 µg/mL in Xylene (Acridine @ 6397 µg/mL)

Custom Services

Custom Synthesis

The AccuStandard Synthesis Department employs several PhD. Organic Chemists with many years of pertinent academic and industrial experience. The experienced staff has developed hundreds of pure chemical compounds for companies and governmental agencies around the world. The very well-equipped synthetic laboratory, with significant analytical support has made many notable synthesis projects possible. We specialize in synthesizing chemicals of high purity to be used as reference standards, and also offer custom synthesis capability on milligram to kilogram scales.



Analytical Capabilities

- GC-MS, GC-FID, GC-ECD, GC-NPD
- HPLC, LC-MS
- ICP, ICP-MS
- access to more analytical instrumentation if necessary

Synthesis and Purification

- Milligram to Kilogram Glassware
- Inert Conditions Equipment
- High Performance Flash Chromatography
- Distillation Equipment - High Vacuum, Molecular (Kugelrohr), and Spinning Band Columns Preparative TLC
- Parr Pressure and Hydrogenation Reactor

Custom Synthesized Products

- PCBs (all 209 congeners), & hydroxy, methoxy, and methylsulfonyl metabolites
- Halo-Dibenzodioxins and Furans
- PBDEs (205 out of 209 congeners) & hydroxy, methoxy, and chloro metabolites
- Fluorinated PBDEs
- Other Brominated Flame Retardants
- PBBs
- PAHs, Nitro-PAHs, Methyl-PAHs
- Pesticides and metabolites
- Explosives and metabolites
- Nonyl- and Octylphenol Ethoxylates
- Mono- and Diester Phthalates
- Organophosphates
- Other Rare Chemicals

AccuStandard is renowned for its quick response to the needs for new compounds. The company's especially strong Synthesis Department allows the synthesis of important and unique products. Featured in its history of firsts, are all of the 209 congeners of polychlorinated biphenyls (PCBs), 205 out of the 209 congeners of polybrominated diphenyl ethers (PBDEs) as well as many halogenated dioxins and dibenzofurans, PAHs, pesticides and fluorinated surrogates substituting the expensive isotopically labelled compounds.

Among the more recent introductions are the hydroxy and methoxy PBDE congeners, mixed bromo/chloro hydroxy and methoxy diphenyl ethers, organophosphate flame retardants, biofuels, plastic additives (AccuStandard authored the Handbook for the Chemical Analysis of Plastic and Polymer Additives published by CRC Press), EPA Method 535 pesticide derivatives and previously unavailable explosive standards.

Custom Formulations

With over 30,000+ custom and 10,000+ listed standards, there is a good chance that AccuStandard will have a standard to meet your needs. However, if your laboratory requires something specific, our Chemists will manufacture a Custom Standard to meet your unique requirements. Custom Standards are an economical and time saving way to have a Standard prepared for your individual needs.

Custom QC options

1. Gravimetric/Volumetric Certification: Each purity is measured gravimetrically and QC verified instrumentally (where available). Every component in the Standard is guaranteed to be within +/-0.5% of the requested value unless otherwise stated on the Certificate of Analysis. The solutions are diluted to volume using Class A glassware. A Certificate of Analysis accompanies each Standard and documents the gravimetric values used.
2. Full Quantitative Certification: This QA/QC method includes extended GC analysis using both internal calibration standards plus statistical analysis. A data package containing analytical and gravimetric data can be provided if requested during the quotation phase (Organic Customs only).



Custom Packaging & Bulk Quantity Requirements

AccuStandard has the resources and equipment to meet your custom packaging requirements.

- Automated ampule filling & sealing 0.2 mL up to 20 mL and ampule sizes from 1 mL to 20 mL
- Quantities from 500 to over 500,000 ampules
- Homogeneity testing
- Amber ampules for added product stability
- Private labeling and packaging (OEM)

We can reduce your costs using the Cozzoli Auto Filling/Sealing Machine to package just the right size product for your application. OEM Standards - Privately labeled standards manufactured and tested to your specifications. Cold and under Nitrogen sealing available.



ASTM D5769 Benzene, Toluene & Total Aromatics in Finished Gasoline by GC/MS

These standards and methods are used in the monitoring of total aromatics according to the methods and amendments to the US Clean Air Act. Amendments containing more stringent specifications are in effect and can be found listed under this method. Standards for Method D5769 are listed on pages 299-306.

Calibration Curve with 3 Component Deuterated Internal Standard Added

Aromatics Calibration Standards Kit

Internal Standard Version

M-GRA-CAL/IS-SET

\$ 375 / set of 5 x 1 mL

Core Calibration Mix 24 Comps.	Std. 1 Target Vol. %	Std. 2 Vol. %	Std. 3 Vol. %	Std. 4 Vol. %	Std. 5 Vol. %
Benzene	3	1.50	0.75	0.375	0.1875
Toluene	19	9.50	4.75	2.375	1.1875
Ethylbenzene	5	2.50	1.25	0.625	0.3125
<i>m</i> -Xylene	6	3.00	1.50	0.750	0.3750
<i>p</i> -Xylene	6	3.00	1.50	0.750	0.3750
<i>o</i> -Xylene	6	3.00	1.50	0.750	0.3750
Isopropylbenzene	3	1.50	0.75	0.375	0.1875
<i>n</i> -Propylbenzene	3	1.50	0.75	0.375	0.1875
1-Methyl-3-ethylbenzene	3	1.50	0.75	0.375	0.1875
1-Methyl-4-ethylbenzene	3	1.50	0.75	0.375	0.1875
1,3,5-Trimethylbenzene	3	1.50	0.75	0.375	0.1875
1-Methyl-2-ethylbenzene	3	1.50	0.75	0.375	0.1875
1,2,4-Trimethylbenzene	5	2.50	1.25	0.625	0.3125
1,2,3-Trimethylbenzene	3	1.50	0.75	0.375	0.1875
Indan	3	1.50	0.75	0.375	0.1875
1,4-Diethylbenzene	3	1.50	0.75	0.375	0.1875
<i>n</i> -Butylbenzene	3	1.50	0.75	0.375	0.1875
1,2-Diethylbenzene	3	1.50	0.75	0.375	0.1875
1,2,4,5-Tetramethylbenzene	2	1.00	0.50	0.250	0.1250
1,2,3,5-Tetramethylbenzene	2	1.00	0.50	0.250	0.1250
Naphthalene	2	1.00	0.50	0.250	0.1250
Pentamethylbenzene	2	1.00	0.50	0.250	0.1250
1-Methylnaphthalene	2	1.00	0.50	0.250	0.1250
2-Methylnaphthalene	2	1.00	0.50	0.250	0.1250
Isooctane	--	Bal	Bal	Bal	Bal

Internal Standard (M-GRA-IS)

Benzene-d ₆	2	2	2	2	2
Ethylbenzene-d ₁₀	2	2	2	2	2
Naphthalene-d ₈	1	1	1	1	1

Optional Sixth Standard

Internal Standard Added

M-GRA-ADD/IS

\$ 100 / 1 x 1 mL

Core Calibr. Mix 24 Comps.	Optional Std. 6 Target Vol. %
Benzene	2.25
Toluene	15
Ethylbenzene	3.75
<i>m</i> -Xylene	4.50
<i>p</i> -Xylene	4.50
<i>o</i> -Xylene	4.50
Isopropylbenzene	2.25
<i>n</i> -Propylbenzene	2.25
3-Ethyltoluene	2.25
4-Ethyltoluene	2.25
1,3,5-Trimethylbenzene	2.25
2-Ethyltoluene	2.25
1,2,4-Trimethylbenzene	3.75
1,2,3-Trimethylbenzene	2.25
Indan	2.25
1,4-Diethylbenzene	2.25
<i>n</i> -Butylbenzene	2.25
1,2-Diethylbenzene	2.25
1,2,4,5-Tetramethylbenzene	4.0
1,2,3,5-Tetramethylbenzene	1.5
Naphthalene	1.5
Pentamethylbenzene	1.5
1-Methylnaphthalene	1.5
2-Methylnaphthalene	1.5
Isooctane	Bal

Internal Standard (M-GRA-IS)

Benzene-d ₆	2
Ethylbenzene-d ₁₀	2
Naphthalene-d ₈	1

Disk Deliverable
(At no additional charge)

CALAMTS™
(Disk containing "Calibration Amounts")
Eliminates hand keyed-in data.

Each analyte in each standard is individually weighed. Actual weights and weight percents are provided.

Daily Quality Control Standard

Without Internal Standard

M-GRA-QC-10ML

\$ 125 / 1 x 10 mL

M-GRA-QC-10ML-PAK

SAVE 20% \$ 500 / 5 x 10 mL

13 comps.

Wt. Ratio	Compound	Wt. Ratio	
<i>n</i> -Hexane	12	Toluene	9
<i>n</i> -Heptane	17	Ethylbenzene	3
<i>n</i> -Octane	17	<i>m</i> -Xylene	3
<i>n</i> -Decane	12	<i>o</i> -Xylene	3
<i>n</i> -Dodecane	5	1,2,4-Trimethylbenzene	3
Isooctane	12	1,2,4,5-Tetramethylbenzene	3
Benzene	1		

Daily Quality Control Standard

With Internal Standard

M-GRA-QC/IS-5ML

\$ 100 / 1 x 5 mL

M-GRA-QC/IS-5ML-PAK

SAVE 20% \$ 400 / 5 x 5 mL

16 comps.

Wt. Ratio	Compound	Wt. Ratio	
<i>n</i> -Hexane	12	Toluene	9
<i>n</i> -Heptane	17	Ethylbenzene	3
<i>n</i> -Octane	17	<i>m</i> -Xylene	3
<i>n</i> -Decane	12	<i>o</i> -Xylene	3
<i>n</i> -Dodecane	5	1,2,4-Trimethylbenzene	3
Isooctane	12	1,2,4,5-Tetramethylbenzene	3
Benzene	1		
	13 comp. Core Mix		100

Technical Note

Use with any M-GRA Calibration Curve.

Includes M-GRA-IS (3 comp. Internal Standards mix) combined with the above 13 comp. Core Mix in a 5 to 100 weight ratio.

ASTM/EPA Sensitivity Test Solution

M-GRA-ST

\$ 10 / 1 x 1 mL

M-GRA-ST-PAK

SAVE 20% \$ 40 / 5 x 1 mL

100 µg/mL in Isooctane

1,4-Diethylbenzene

3 Comp. Deuterated Internal Std. Mix

M-GRA-IS-5ML

\$ 158 / 1 x 5 mL

M-GRA-IS-5ML-PAK

SAVE 20% \$ 632 / 5 x 5 mL

3 comps.

Mix Ratio	Compound	Mix Ratio	
Benzene-d ₆	2 mL	Naphthalene-d ₈	1 gm
Ethylbenzene-d ₁₀	2 mL		

ASTM D5769 continued on Next Pages

ASTM D5769 Benzene, Toluene & Total Aromatics in Finished Gasoline by GC/MS

Calibration Curve with 4 Component Deuterated Internal Standard Added

Aromatics Calibration Standards Kit

With Internal Standard

M-GRA-CAL-R/IS-R-SET

\$ 425 / set of 5 x 1 mL

Core Calibr. Mix 24 comps.	Std. 1 Target Wt. %	Std. 2 Wt. %	Std. 3 Wt. %	Std. 4 Wt. %	Std. 5 Wt. %
Benzene	3.13	1.78	0.95	0.490	0.2490
Toluene	19.65	11.11	5.90	3.058	1.5547
Ethylbenzene	5.12	2.92	1.55	0.805	0.4090
<i>m</i> -Xylene	6.27	3.50	1.86	0.962	0.4891
<i>p</i> -Xylene	6.33	3.50	1.86	0.962	0.4891
<i>o</i> -Xylene	6.51	3.56	1.89	0.980	0.4981
Isopropylbenzene	3.06	1.74	0.93	0.480	0.2439
<i>n</i> -Propylbenzene	3.04	1.74	0.93	0.480	0.2440
3-Ethyltoluene	3.08	1.75	0.93	0.481	0.2446
4-Ethyltoluene	3.05	1.74	0.93	0.479	0.2437
1,3,5-Trimethylbenzene	3.07	1.75	0.93	0.481	0.2448
2-Ethyltoluene	3.14	1.78	0.95	0.490	0.2492
1,2,4-Trimethylbenzene	5.18	2.95	1.57	0.812	0.4130
1,2,3-Trimethylbenzene	3.19	1.81	0.96	0.498	0.2530
Indan	3.46	1.95	1.04	0.536	0.2726
1,4-Diethylbenzene	3.04	1.74	0.93	0.480	0.2439
<i>n</i> -Butylbenzene	3.05	1.74	0.92	0.479	0.2434
1,2-Diethylbenzene	3.22	1.78	0.95	0.490	0.2489
1,2,4,5-Tetramethylbenzene	2.10	1.20	0.64	0.329	0.1674
1,2,3,5-Tetramethylbenzene	2.09	1.20	0.64	0.330	0.1679
Naphthalene	2.35	1.34	0.71	0.369	0.1877
Pentamethylbenzene	2.16	1.23	0.66	0.340	0.1727
1-Methylnaphthalene	2.32	1.34	0.71	0.369	0.1877
2-Methylnaphthalene	2.41	1.37	0.73	0.378	0.1922
Isooctane	-----	43.47	69.96	84.441	92.0905

Optional Sixth Standard

With Internal Standard

M-GRA-ADD/IS-R

\$ 100 / 1 x 1 mL

Core Calibr. Mix 24 comps.	Optional Std. 6 Target Wt. %
Benzene	2.48
Toluene	16.29
Ethylbenzene	4.07
<i>m</i> -Xylene	4.87
<i>p</i> -Xylene	4.87
<i>o</i> -Xylene	4.96
Isopropylbenzene	2.43
<i>n</i> -Propylbenzene	2.43
3-Ethyltoluene	2.44
4-Ethyltoluene	2.43
1,3,5-Trimethylbenzene	2.44
2-Ethyltoluene	2.48
1,2,4-Trimethylbenzene	4.11
1,2,3-Trimethylbenzene	2.52
Indan	2.71
1,4-Diethylbenzene	2.43
<i>n</i> -Butylbenzene	2.42
1,2-Diethylbenzene	2.48
1,2,4,5-Tetramethylbenzene	4.44
1,2,3,5-Tetramethylbenzene	1.67
Naphthalene	1.87
Pentamethylbenzene	1.72
1-Methylnaphthalene	1.87
2-Methylnaphthalene	1.91
Isooctane	17.67

Technical Note

A sixth standard has been formulated to improve the linearity at the high end of the calibration curve. This can be especially helpful in the quantification of gasoline containing high levels of toluene.

Technical Note

This set of calibration solutions was formulated to improve quantification for Toluene by using Toluene-d₈ as an additional Internal Standard.

Internal Standard

(M-GRA-IS-R) Mix Ratio

	(2 mL)	16.57	16.57	16.57	16.57	16.57
Benzene-d ₈	(2 mL)	16.57	16.76	16.76	16.76	16.76
Ethylbenzene-d ₁₀	(2 mL)	8.78	8.78	8.78	8.78	8.78
Naphthalene-d ₈	(1 gm)	57.88	57.88	57.88	57.88	57.88
Toluene-d ₈	(7 mL)					

Internal Standard

(M-GRA-IS-R) Mix Ratio

	(2 mL)	16.57
Benzene-d ₈	(2 mL)	16.76
Ethylbenzene-d ₁₀	(2 mL)	8.78
Naphthalene-d ₈	(1 mL)	57.88
Toluene-d ₈	(7 mL)	

The 4 component internal standard mix (M-GRA-IS-R) is combined with the 25 component core calibration curve mixtures in a 12 to 100 weight ratio to formulate a complete calibration solution containing 29 components.

Daily Quality Control Standard

Without Internal Standard

M-GRA-QC-10ML

\$ 125 / 1 x 10 mL

M-GRA-QC-10ML-PAK **SAVE 20%** \$ 500 / 5 x 10 mL
13 comps.

Wt. Ratio	Wt. Ratio
<i>n</i> -Hexane 12	Toluene 9
<i>n</i> -Heptane 17	Ethylbenzene 3
<i>n</i> -Octane 17	<i>m</i> -Xylene 3
<i>n</i> -Decane 12	<i>o</i> -Xylene 3
<i>n</i> -Dodecane 5	1,2,4-Trimethylbenzene 3
Isooctane 12	1,2,4,5-Tetramethylbenzene 3
Benzene 1	

Daily Quality Control Standard

With Internal Standard

M-GRA-QC/IS-R-5ML

\$ 125 / 1 x 5 mL

M-GRA-QC/IS-R-5ML-PAK **SAVE 20%** \$ 500 / 5 x 5 mL
17 comps.

Wt. Ratio	Wt. Ratio
<i>n</i> -Hexane 12	Toluene 9
<i>n</i> -Heptane 17	Ethylbenzene 3
<i>n</i> -Octane 17	<i>m</i> -Xylene 3
<i>n</i> -Decane 12	<i>o</i> -Xylene 3
<i>n</i> -Dodecane 5	1,2,4-Trimethylbenzene 3
Isooctane 12	1,2,4,5-Tetramethylbenzene 3
Benzene 1	13 comp. Core Mix 100

Includes M-GRA-IS-R (4 comp. Internal Standard Mix) combined with the above 13 comp. Core Mix in a 12 to 100 weight ratio.

4 comp. Deuterated Internal Std. Mix

M-GRA-IS-R-10ML

\$ 225 / 1 x 10 mL

M-GRA-IS-R-10ML-PAK **SAVE 20%** \$ 900 / 5 x 10 mL
4 comps.

Mix Ratio	Mix Ratio
Benzene-d ₈ 2 mL	Naphthalene-d ₈ 1 gm
Ethylbenzene-d ₁₀ 2 mL	Toluene-d ₈ 7 mL

ASTM/EPA Sensitivity Test Solution

M-GRA-ST

\$ 10 / 1 x 1 mL

M-GRA-ST-PAK

SAVE 20% \$ 40 / 5 x 1 mL

100 µg/mL in Isooctane

1,4-Diethylbenzene

ASTM D5769 Benzene, Toluene & Total Aromatics in Finished Gasoline by GC/MS

Calibration Curve with No Internal Standard

Calibration Curve

Without Internal Standard

D-5769-CAL-5ML-SET
D-5769-CAL-10ML-SET

\$ 1500 / set of 5 x 5 mL
\$ 2750 / set of 5 x 10 mL

Core Calibr. Mix 23 Comps.	Std. 1 Target Wt. %	Std. 2 Wt. %	Std. 3 Wt. %	Std. 4 Wt. %	Std. 5 Wt. %
Benzene	5.25	2.95	1.575	0.8144	0.4143
Toluene	19.67	11.06	5.898	3.0505	1.5519
Ethylbenzene	5.18	2.91	1.552	0.8026	0.4083
<i>m</i> -Xylene	6.19	3.48	1.856	0.9598	0.4883
<i>p</i> -Xylene	6.19	3.48	1.856	0.9598	0.4883
<i>o</i> -Xylene	6.30	3.54	1.890	0.9776	0.4973
Isopropylbenzene	3.09	1.74	0.925	0.4786	0.2435
<i>n</i> -Propylbenzene	3.09	1.74	0.926	0.4787	0.2435
3-Ethyltoluene	3.10	1.74	0.928	0.4801	0.2442
4-Ethyltoluene	3.08	1.73	0.925	0.4782	0.2433
1,3,5-Trimethylbenzene	3.10	1.74	0.929	0.4804	0.2444
2-Ethyltoluene	3.15	1.77	0.945	0.4890	0.2488
1,2,4-Trimethylbenzene	5.23	2.94	1.567	0.8104	0.4123
1,2,3-Trimethylbenzene	3.20	1.80	0.960	0.4965	0.2526
Indan	3.45	1.94	1.034	0.5350	0.2722
1,4-Diethylbenzene	3.09	1.74	0.925	0.4786	0.2435
<i>n</i> -Butylbenzene	3.08	1.73	0.923	0.4776	0.2430
1,2-Diethylbenzene	3.15	1.77	0.945	0.4885	0.2485
1,2,4,5-Tetramethylbenzene	2.12	1.19	0.635	0.3284	0.1671
1,2,3,5-Tetramethylbenzene	2.12	1.19	0.637	0.3295	0.1676
Naphthalene	2.37	1.34	0.712	0.3683	0.1874
1-Methylnaphthalene	2.37	1.34	0.712	0.3683	0.1874
2-Methylnaphthalene	2.43	1.37	0.730	0.3773	0.1919
Isooctane	-----	43.77	70.015	84.4922	92.1105

Optional Sixth Standard

Without Internal Standard

D-5769-ADD-5ML \$ 150 / 1 x 5 mL
D-5769-ADD-10ML \$ 300 / 1 x 10 mL

Core Calibration Mix 23 Comps.	Target Wt. %
Benzene	4.16
Toluene	16.41
Ethylbenzene	4.10
<i>m</i> -Xylene	4.91
<i>p</i> -Xylene	4.91
<i>o</i> -Xylene	5.00
Isopropylbenzene	2.45
<i>n</i> -Propylbenzene	2.45
3-Ethyltoluene	2.45
4-Ethyltoluene	2.44
1,3,5-Trimethylbenzene	2.46
2-Ethyltoluene	2.50
1,2,4-Trimethylbenzene	4.14
1,2,3-Trimethylbenzene	2.54
Indan	2.73
1,4-Diethylbenzene	2.45
<i>n</i> -Butylbenzene	2.44
1,2-Diethylbenzene	2.50
1,2,4,5-Tetramethylbenzene	1.68
1,2,3,5-Tetramethylbenzene	1.68
Naphthalene	1.88
1-Methylnaphthalene	1.88
2-Methylnaphthalene	1.93
Isooctane	19.92

Disk Deliverable (At no additional charge)

CALAMTS™

(Disk containing "Calibration Amounts")
Eliminates hand keyed-in data.

Each analyte in each standard is individually weighed. Actual weights and weight percents are provided.

Daily Quality Control Standard

Without Internal Standard

D-5769-QC-10ML \$ 125 / 1 x 10 mL
D-5769-QC-10ML-PAK **SAVE 20%** \$ 500 / 5 x 10 mL
14 comps.

Wt. Ratio		Wt. Ratio	
<i>n</i> -Hexane	12	Toluene	9
<i>n</i> -Heptane	17	Ethylbenzene	3
<i>n</i> -Octane	17	<i>m</i> -Xylene	3
<i>n</i> -Decane	12	<i>o</i> -Xylene	3
<i>n</i> -Dodecane	5	1,2,4-Trimethylbenzene	3
Isooctane	12	1,2,4,5-Tetramethylbenzene	2
Benzene	1	Naphthalene	1

4 comp. Deuterated Internal Std. Mix

M-GRA-IS-R-10ML \$ 225 / 1 x 10 mL
M-GRA-IS-R-10ML-PAK **SAVE 20%** \$ 900 / 5 x 10 mL
4 comps.

Mix Ratio		Mix Ratio	
Benzene-d ₆	2 mL	Naphthalene-d ₈	1 gm
Ethylbenzene-d ₁₀	2 mL	Toluene-d ₈	7 mL

3 comp. Deuterated Internal Std. Mix

M-GRA-IS-5ML \$ 158 / 1 x 5 mL
M-GRA-IS-5ML-PAK **SAVE 20%** \$ 632 / 5 x 5 mL
3 comps.

Mix Ratio		Mix Ratio	
Benzene-d ₆	2 mL	Naphthalene-d ₈	1 gm
Ethylbenzene-d ₁₀	2 mL		

ASTM D5769 Benzene, Toluene & Total Aromatics in Finished Gasoline by GC/MS

With 3 Component Internal Standard

Calibration Curve

With Internal Standard

D-5769-CAL/IS-SET

\$ 375 / 5 x 1 mL

Core Calibr. Mix 24 Comps.	Std. 1 Target Wt. %	Std. 2 Wt. %	Std. 3 Wt. %	Std. 4 Wt. %	Std. 5 Wt. %
Benzene	5.25	2.95	1.575	0.8144	0.4143
Toluene	19.67	11.06	5.898	3.0505	1.5519
Ethylbenzene	5.18	2.91	1.552	0.8026	0.4083
<i>m</i> -Xylene	6.19	3.48	1.856	0.9598	0.4883
<i>p</i> -Xylene	6.19	3.48	1.856	0.9598	0.4883
<i>o</i> -Xylene	6.30	3.54	1.890	0.9776	0.4973
Isopropylbenzene	3.09	1.74	0.925	0.4786	0.2435
<i>n</i> -Propylbenzene	3.09	1.74	0.926	0.4787	0.2435
3-Ethyltoluene	3.10	1.74	0.928	0.4801	0.2442
4-Ethyltoluene	3.08	1.73	0.925	0.4782	0.2433
1,3,5-Trimethylbenzene	3.10	1.74	0.929	0.4804	0.2444
2-Ethyltoluene	3.15	1.77	0.945	0.4890	0.2488
1,2,4-Trimethylbenzene	5.23	2.94	1.567	0.8104	0.4123
1,2,3-Trimethylbenzene	3.20	1.80	0.960	0.4965	0.2526
Indan	3.45	1.94	1.034	0.5350	0.2722
1,4-Diethylbenzene	3.09	1.74	0.925	0.4786	0.2435
<i>n</i> -Butylbenzene	3.08	1.73	0.923	0.4776	0.2430
1,2-Diethylbenzene	3.15	1.77	0.945	0.4885	0.2485
1,2,4,5-Tetramethylbenzene	2.12	1.19	0.635	0.3284	0.1671
1,2,3,5-Tetramethylbenzene	2.12	1.19	0.637	0.3295	0.1676
Naphthalene	2.37	1.34	0.712	0.3683	0.1874
1-Methylnaphthalene	2.37	1.34	0.712	0.3683	0.1874
2-Methylnaphthalene	2.43	1.37	0.730	0.3773	0.1919
Isooctane	-----	43.77	70.015	84.4922	92.1105

Optional Sixth Standard

With Internal Standard

D-5769-ADD/IS

\$ 100 / 1 x 1 mL

Core Calibration Mix 24 Comps.	Target Wt. %
Benzene	4.16
Toluene	16.41
Ethylbenzene	4.10
<i>m</i> -Xylene	4.91
<i>p</i> -Xylene	4.91
<i>o</i> -Xylene	5.00
Isopropylbenzene	2.45
<i>n</i> -Propylbenzene	2.45
3-Ethyltoluene	2.45
4-Ethyltoluene	2.44
1,3,5-Trimethylbenzene	2.46
2-Ethyltoluene	2.50
1,2,4-Trimethylbenzene	4.14
1,2,3-Trimethylbenzene	2.54
Indan	2.73
1,4-Diethylbenzene	2.45
<i>n</i> -Butylbenzene	2.44
1,2-Diethylbenzene	2.50
1,2,4,5-Tetramethylbenzene	1.68
1,2,3,5-Tetramethylbenzene	1.68
Naphthalene	1.88
1-Methylnaphthalene	1.88
2-Methylnaphthalene	1.93
Isooctane	19.92

Technical Note

A sixth standard has been formulated to improve the linearity at the high end of the calibration curve. This can be especially helpful in the quantification of gasoline containing high levels of toluene.

Internal Standard

M-GRA-IS

Mix ratio

Benzene-d ₆	2 mL
Ethylbenzene-d ₁₀	2 mL
Naphthalene-d ₈	1 gm

The 3 comp. Internal Standard Mix (M-GRA-IS) is combined with the 24 component Core Calibration Curve Mixes above in a 5 to 100 weight ratio to formulate these 27 comp. calibration solutions.

Daily Quality Control Standard

With Internal Standard

D-5769-QC/IS-5ML

\$ 100 / 1 x 5 mL

D-5769-QC/IS-5ML-PAK

SAVE 20% \$ 400 / 5 x 5 mL

17 comps.

Wt. Ratio		Wt. Ratio	
<i>n</i> -Hexane	12		
<i>n</i> -Heptane	17	Toluene	9
<i>n</i> -Octane	17	Ethylbenzene	3
<i>n</i> -Decane	12	<i>m</i> -Xylene	3
<i>n</i> -Dodecane	5	<i>o</i> -Xylene	3
Isooctane	12	1,2,4-Trimethylbenzene	3
Benzene	1	1,2,4,5-Tetramethylbenzene	2
		Naphthalene	1

Includes M-GRA-IS (3 comp. mix) added in 5 to 100 weight ratio

Resolution Standard

M-GRA-RES

\$ 30 / 1 x 1 mL

M-GRA-RES-PAK

SAVE 20% \$ 120 / 5 x 1 mL

3 comps.

	Wt. %
1,3,5-Trimethylbenzene	3.0
1-Methyl-2-ethylbenzene	3.0
Isooctane	94.0

3 comp. Deuterated Internal Std. Mix

M-GRA-IS-5ML

\$ 158 / 1 x 5 mL

M-GRA-IS-5ML-PAK

SAVE 20% \$ 632 / 5 x 5 mL

3 comps.

Mix Ratio

Benzene-d ₆	2 mL
Ethylbenzene-d ₁₀	2 mL
Naphthalene-d ₈	1 gm

Sensitivity Test Solution

M-GRA-ST

\$ 10 / 1 x 1 mL

M-GRA-ST-PAK

SAVE 20% \$ 40 / 5 x 1 mL

100 µg/mL in Isooctane

1,4-Diethyl benzene

Fragmentation Pattern Standard

M-GRA-FP

\$ 20 / 1 x 1 mL

M-GRA-FP-PAK

SAVE 20% \$ 80 / 5 x 1 mL

3.0% w/w in Isooctane

1,2,3-Trimethylbenzene

Mass Scan Range Standard

M-GRA-MSR

\$ 20 / 1 x 1 mL

M-GRA-MSR-PAK

SAVE 20% \$ 80 / 5 x 1 mL

3.0% w/w in Isooctane

Toluene

ASTM D5769 Benzene, Toluene & Total Aromatics in Finished Gasoline by GC/MS

With 4 Component Internal Standard (includes Toluene-d₈)

Calibration Curve with Deuterated Toluene

With Internal Standard

D-5769-CAL/IS-R-SET

\$ 375 / 5 x 1 mL

Core Calibr. Mix 24 Comps.	Std. 1 Target Wt. %	Std. 2 Wt. %	Std. 3 Wt. %	Std. 4 Wt. %	Std. 5 Wt. %
Benzene	5.25	2.95	1.575	0.8144	0.4143
Toluene	19.67	11.06	5.898	3.0505	1.5519
Ethylbenzene	5.18	2.91	1.552	0.8026	0.4083
<i>m</i> -Xylene	6.19	3.48	1.856	0.9598	0.4883
<i>p</i> -Xylene	6.19	3.48	1.856	0.9598	0.4883
<i>o</i> -Xylene	6.30	3.54	1.890	0.9776	0.4973
Isopropylbenzene	3.09	1.74	0.925	0.4786	0.2435
<i>n</i> -Propylbenzene	3.09	1.74	0.926	0.4787	0.2435
3-Ethyltoluene	3.10	1.74	0.928	0.4801	0.2442
4-Ethyltoluene	3.08	1.73	0.925	0.4782	0.2433
1,3,5-Trimethylbenzene	3.10	1.74	0.929	0.4804	0.2444
2-Ethyltoluene	3.15	1.77	0.945	0.4890	0.2488
1,2,4-Trimethylbenzene	5.23	2.94	1.567	0.8104	0.4123
1,2,3-Trimethylbenzene	3.20	1.80	0.960	0.4965	0.2526
Indan	3.45	1.94	1.034	0.5350	0.2722
1,4-Diethylbenzene	3.09	1.74	0.925	0.4786	0.2435
<i>n</i> -Butylbenzene	3.08	1.73	0.923	0.4776	0.2430
1,2-Diethylbenzene	3.15	1.77	0.945	0.4885	0.2485
1,2,4,5-Tetramethylbenzene	2.12	1.19	0.635	0.3284	0.1671
1,2,3,5-Tetramethylbenzene	2.12	1.19	0.637	0.3295	0.1676
Naphthalene	2.37	1.34	0.712	0.3683	0.1874
1-Methylnaphthalene	2.37	1.34	0.712	0.3683	0.1874
2-Methylnaphthalene	2.43	1.37	0.730	0.3773	0.1919
Isooctane	----	43.77	70.015	84.4922	92.1105

Optional Sixth Standard

With Internal Standard

D-5769-ADD/IS-R

\$ 100 / 1 x 1 mL

Core Calibration Mix 24 Comp.	Target Wt. %
Benzene	4.16
Toluene	16.41
Ethylbenzene	4.10
<i>m</i> -Xylene	4.91
<i>p</i> -Xylene	4.91
<i>o</i> -Xylene	5.00
Isopropylbenzene	2.45
<i>n</i> -Propylbenzene	2.45
3-Ethyltoluene	2.45
4-Ethyltoluene	2.44
1,3,5-Trimethylbenzene	2.46
2-Ethyltoluene	2.50
1,2,4-Trimethylbenzene	4.14
1,2,3-Trimethylbenzene	2.54
Indan	2.73
1,4-Diethylbenzene	2.45
<i>n</i> -Butylbenzene	2.44
1,2-Diethylbenzene	2.50
1,2,4,5-Tetramethylbenzene	1.68
1,2,3,5-Tetramethylbenzene	1.68
Naphthalene	1.88
1-Methylnaphthalene	1.88
2-Methylnaphthalene	1.93
Isooctane	19.92

Internal Standard

M-GRA-IS-R

Mix ratio

Benzene-d ₆	2 mL
Ethylbenzene-d ₁₀	2 mL
Naphthalene-d ₈	1 gm
Toluene-d ₈	7 mL

The 4 comp. Internal Standard Mix (M-GRA-IS-R) is combined with the 24 component core calibration curve mixtures above in a 12 to 100 weight ratio to formulate these 28 component calibration solutions.

Daily Quality Control Standard

With Internal Standard

D-5769-QC/IS-R-5ML

\$ 100 / 1 x 5 mL

D-5769-QC/IS-R-5ML-PAK

SAVE 20% \$ 400 / 5 x 5 mL

18 comps.

Wt. Ratio		Wt. Ratio	
<i>n</i> -Hexane	12	Toluene	9
<i>n</i> -Heptane	17	Ethylbenzene	3
<i>n</i> -Octane	17	<i>m</i> -Xylene	3
<i>n</i> -Decane	12	<i>o</i> -Xylene	3
<i>n</i> -Dodecane	5	1,2,4-Trimethylbenzene	3
Isooctane	12	1,2,4,5-Tetramethylbenzene	2
Benzene	1	Naphthalene	1

Includes M-GRA-IS-R (4 comp. mix) added in 12 to 100 weight ratio

Sensitivity Test Solution

M-GRA-ST

\$ 10 / 1 x 1 mL

M-GRA-ST-PAK

SAVE 20% \$ 40 / 5 x 1 mL

100 µg/mL in Isooctane

1,4-Diethyl benzene

Resolution Standard

M-GRA-RES

\$ 30 / 1 x 1 mL

M-GRA-RES-PAK

SAVE 20% \$ 120 / 5 x 1 mL

3 comps.

	Wt. %
1,3,5-Trimethylbenzene	3.0
1-Methyl-2-ethylbenzene	3.0
Isooctane	94.0

4 comp. Deuterated Internal Std. Mix

M-GRA-IS-R-10ML

\$ 225 / 1 x 10 mL

M-GRA-IS-R-10ML-PAK

SAVE 20% \$ 900 / 5 x 10 mL

Mix Ratio		Mix Ratio	
Benzene-d ₆	2 mL	Naphthalene-d ₈	1 gm
Ethylbenzene-d ₁₀	2 mL	Toluene-d ₈	7 mL

Fragmentation Pattern Standard

M-GRA-FP

\$ 20 / 1 x 1 mL

M-GRA-FP-PAK

SAVE 20% \$ 80 / 5 x 1 mL

3.0 w/w in Isooctane

1,2,3-Trimethylbenzene

ASTM D5769 Benzene, Toluene & Total Aromatics in Finished Gasoline by GC/MS

Proposed / Promulgated Method Modifications

Calibration Curve

With Chlorinated Internal Standard

D-5769-CAL/IS-R2-SET

\$ 375 / 5 x 1 mL

Core Calibr. Mix 24 Comps.	Std. 1 Target Wt. %	Std. 2 Wt. %	Std. 3 Wt. %	Std. 4 Wt. %	Std. 5 Wt. %
Benzene	5.25	2.95	1.575	0.8144	0.4143
Toluene	19.67	11.06	5.898	3.0505	1.5519
Ethylbenzene	5.18	2.91	1.552	0.8026	0.4083
<i>m</i> -Xylene	6.19	3.48	1.856	0.9598	0.4883
<i>p</i> -Xylene	6.19	3.48	1.856	0.9598	0.4883
<i>o</i> -Xylene	6.30	3.54	1.890	0.9776	0.4973
Isopropylbenzene	3.09	1.74	0.925	0.4786	0.2435
<i>n</i> -Propylbenzene	3.09	1.74	0.926	0.4787	0.2435
3-Ethyltoluene	3.10	1.74	0.928	0.4801	0.2442
4-Ethyltoluene	3.08	1.73	0.925	0.4782	0.2433
1,3,5-Trimethylbenzene	3.10	1.74	0.929	0.4804	0.2444
2-Ethyltoluene	3.15	1.77	0.945	0.4890	0.2488
1,2,4-Trimethylbenzene	5.23	2.94	1.567	0.8104	0.4123
1,2,3-Trimethylbenzene	3.20	1.80	0.960	0.4965	0.2526
Indan	3.45	1.94	1.034	0.5350	0.2722
1,4-Diethylbenzene	3.09	1.74	0.925	0.4786	0.2435
<i>n</i> -Butylbenzene	3.08	1.73	0.923	0.4776	0.2430
1,2-Diethylbenzene	3.15	1.77	0.945	0.4885	0.2485
1,2,4,5-Tetramethylbenzene	2.12	1.19	0.635	0.3284	0.1671
1,2,3,5-Tetramethylbenzene	2.12	1.19	0.637	0.3295	0.1676
Naphthalene	2.37	1.34	0.712	0.3683	0.1874
1-Methylnaphthalene	2.37	1.34	0.712	0.3683	0.1874
2-Methylnaphthalene	2.43	1.37	0.730	0.3773	0.1919
Isooctane	-----	43.77	70.015	84.4922	92.1105

Optional Sixth Standard

With Internal Standard

D-5769-ADD/IS-R2

\$ 100 / 1 x 1 mL

Core Calibration Mix 24 Components	Target Wt. %
Benzene	4.16
Toluene	16.41
Ethylbenzene	4.10
<i>m</i> -Xylene	4.91
<i>p</i> -Xylene	4.91
<i>o</i> -Xylene	5.00
Isopropylbenzene	2.45
<i>n</i> -Propylbenzene	2.45
3-Ethyltoluene	2.45
4-Ethyltoluene	2.44
1,3,5-Trimethylbenzene	2.46
2-Ethyltoluene	2.50
1,2,4-Trimethylbenzene	4.14
1,2,3-Trimethylbenzene	2.54
Indan	2.73
1,4-Diethylbenzene	2.45
<i>n</i> -Butylbenzene	2.44
1,2-Diethylbenzene	2.50
1,2,4,5-Tetramethylbenzene	1.68
1,2,3,5-Tetramethylbenzene	1.68
Naphthalene	1.88
1-Methylnaphthalene	1.88
2-Methylnaphthalene	1.93
Isooctane	19.92

Disk Deliverable (At no additional charge)

CALAMTS™
(Disk containing "Calibration Amounts")
Eliminates hand keyed-in data.

Each analyte in each standard is individually weighed. Actual weights and weight percents are provided.

Internal Standard

M-GRA-IS-R2

	Mix ratio
Chlorobenzene	2 mL
1,2-Dichlorobenzene	2 mL
1,2,4-Trichlorobenzene	1 mL

The 3 comp. Internal Standard Mix (M-GRA-IS-R2) is combined with the 24 Comp. Core Calibration Curve mixtures above in a 5 to 100 weight ratio to formulate these 27 Comp. calibration solutions.

Daily QC Standard

With Internal Standard

D-5769-QC/IS-R2-5ML

\$ 100 / 1 x 5 mL

D-5769-QC/IS-R2-5ML-PAK **SAVE 20%** \$ 400 / 5 x 5 mL

17 comps.

	Wt. Ratio		Wt. Ratio
<i>n</i> -Hexane	12	Toluene	9
<i>n</i> -Heptane	17	Ethylbenzene	3
<i>n</i> -Octane	17	<i>m</i> -Xylene	3
<i>n</i> -Decane	12	<i>o</i> -Xylene	3
<i>n</i> -Dodecane	5	1,2,4-Trimethylbenzene	3
Isooctane	12	1,2,4,5-Tetramethylbenzene	2
Benzene	1	Naphthalene	1

Includes M-GRA-IS-R2 added in 5 to 100 weight ratio.

Sensitivity Test Solution

M-GRA-ST

\$ 10 / 1 x 1 mL

M-GRA-ST-PAK

SAVE 20% \$ 40 / 5 x 1 mL

100 µg/mL in Isooctane

1,4-Diethyl benzene

Fragmentation Pattern Standard

M-GRA-FP

\$ 20 / 1 x 1 mL

M-GRA-FP-PAK

SAVE 20% \$ 80 / 5 x 1 mL

3.0 w/w in Isooctane

1,2,3-Trimethylbenzene

3 comp. Chlorinated Internal Std. Mix

M-GRA-IS-R2-VAP

\$ 125 / set of 25 x 1 mL

M-GRA-IS-R2-25ML

\$ 100 / 1 x 25 mL

3 comps.

	Mix Ratio
Chlorobenzene	2 mL
1,2-Dichlorobenzene	2 mL
1,2,4-Trichlorobenzene	1 mL

Resolution Standard

M-GRA-RES

\$ 30 / 1 x 1 mL

M-GRA-RES-PAK

SAVE 20% \$ 120 / 5 x 1 mL

3 comps.

	Wt. %
1,3,5-Trimethylbenzene	3.0
1-Methyl-2-ethylbenzene	3.0
Isooctane	94

ASTM D5769 Benzene, Toluene & Total Aromatics in Finished Gasoline by GC/MS

Special QA/QC Formulations

Daily QC Standard

Without Internal Standard

M-GRA-QC-R-10ML \$ 125 / 1 x 10 mL
 M-GRA-QC-R-10ML-PAK **SAVE 20%** \$ 500 / 5 x 10 mL
 15 comps.

Wt. Ratio		Wt. Ratio	
<i>n</i> -Hexane	12	Ethylbenzene	3
<i>n</i> -Heptane	17	<i>m</i> -Xylene	3
<i>n</i> -Octane	17	<i>o</i> -Xylene	3
<i>n</i> -Decane	12	1,2,4-Trimethylbenzene	3
<i>n</i> -Dodecane	5	1,2,4,5-Tetramethylbenzene	1
Isooctane	12	Pentamethylbenzene	1
Benzene	1	1-Methylnaphthalene	1
Toluene	9		

For use with any M-GRA Calibration Curve

Daily QC Standard

With Internal Standard M-GRA-IS

M-GRA-QC-R/IS-5ML \$ 100 / 1 x 5 mL
 M-GRA-QC-R/IS-5ML-PAK **SAVE 20%** \$ 400 / 5 x 5 mL
 18 comps.

Wt. Ratio		Wt. Ratio	
<i>n</i> -Hexane	12	Ethylbenzene	3
<i>n</i> -Heptane	17	<i>m</i> -Xylene	3
<i>n</i> -Octane	17	<i>o</i> -Xylene	3
<i>n</i> -Decane	12	1,2,4-Trimethylbenzene	3
<i>n</i> -Dodecane	5	1,2,4,5-Tetramethylbenzene	1
Isooctane	12	Pentamethylbenzene	1
Benzene	1	1-Methylnaphthalene	1
Toluene	9		

Includes M-GRA-IS combined with the above 15 comp. Core Mix in a 5 to 100 weight ratio.

3 comp. Deuterated Internal Std. Mix

M-GRA-IS-5ML \$ 158 / 1 x 5 mL
 M-GRA-IS-5ML-PAK **SAVE 20%** \$ 632 / 5 x 5 mL
 3 comps.

Mix Ratio	
Benzene-d ₆	2 mL
Ethylbenzene-d ₁₀	2 mL
Naphthalene-d ₈	1 gm

4 comp. Deuterated Internal Std. Mix

M-GRA-IS-R-10ML \$ 225 / 1 x 10 mL
 M-GRA-IS-R-10ML-PAK **SAVE 20%** \$ 900 / 5 x 10 mL
 4 comps.

Mix Ratio	
Benzene-d ₆	2 mL
Ethylbenzene-d ₁₀	2 mL
Naphthalene-d ₈	1 gm
Toluene-d ₈	7 mL

Daily QC Standard

With Internal Standard M-GRA-IS-R

M-GRA-QCR/IS-R-5ML \$ 125 / 1 x 5 mL
 M-GRA-QCR/IS-R-5ML-PAK **SAVE 20%** \$ 500 / 5 x 5 mL
 19 comps.

Wt. Ratio		Wt. Ratio	
<i>n</i> -Hexane	12	Ethylbenzene	3
<i>n</i> -Heptane	17	<i>m</i> -Xylene	3
<i>n</i> -Octane	17	<i>o</i> -Xylene	3
<i>n</i> -Decane	12	1,2,4-Trimethylbenzene	3
<i>n</i> -Dodecane	5	1,2,4,5-Tetramethylbenzene	1
Isooctane	12	Pentamethylbenzene	1
Benzene	1	1-Methylnaphthalene	1
Toluene	9		

Includes M-GRA-IS-R combined with the above 15 comp. Core Mix in a 12 to 100 weight ratio.

Aromatics for Analysis by GC/MS (Daily QC Standards) Set

Original Formulations

M-GRA-K1-SET \$ 600 / Set

Set includes:	Units	Function
M-GRA-CAL/IS-SET	5 x 1 mL	5 Point Curve with 3 Internal Standards
M-GRA-QC/IS-5ML	1 x 5 mL	Daily QC with 3 Internal Standards
M-GRA-IS-5ML	1 x 5 mL	3 Component Internal Standard
M-GRA-ST	1 x 1 mL	Sensitivity Test Solution

Revision 5 F

M-GRA-K2-SET \$ 700 / Set

Set includes:	Units	Function
M-GRA-CAL/IS-SET	5 x 1 mL	5 Point Curve with 3 Internal Standards
M-GRA-ADD/IS	1 x 1 mL	6th Standard for Revision 5 F
M-GRA-QC/IS-5ML	1 x 5 mL	Daily QC with 3 Internal Standards
M-GRA-IS-5ML	1 x 5 mL	3 Component Internal Standard
M-GRA-ST	1 x 1 mL	Sensitivity Test Solution

4 Component Internal Standard Formulations

M-GRA-K4-SET \$ 850 / Set

Set includes:	Units	Function
M-GRA-CAL-R/IS-R-SET	5 x 1 mL	5 Point Curve with 4 Internal Standards
M-GRA-ADD/IS-R	1 x 1 mL	6th Standard for Revision 5 F
M-GRA-QC-R/IS-R-5ML	1 x 5 mL	Daily QC with 4 Internal Standards
M-GRA-IS-R-10ML	1 x 10 mL	4 Component Internal Standard
M-GRA-ST	1 x 1 mL	Sensitivity Test Solution

Technical Note

Used to meet the Toluene-d₈ internal standard version recommended by a network of major petroleum refineries.



ASTM D5769 Additional Internal, Deuterated and Quality Control Standards

4 comp. Deuterated Internal Std. Mix

ASTM-P-0140-IS \$ 75 / 1 x 10 mL
 ASTM-P-0140-IS-PAK **SAVE 20%** \$ 300 / 5 x 10 mL
 4 comps.

	Vol. %	Compound	Vol. %
Benzene-d ₆	2	Naphthalene-d ₈	1
Ethylbenzene-d ₁₀	2	Isooctane *	balance

4 comp. Deuterated Internal Std. Mix

ASTM-P-0140-IS2 \$ 75 / 1 x 10 mL
 ASTM-P-0140-IS2-PAK **SAVE 20%** \$ 300 / 5 x 10 mL
 5 comps.

	Vol. %		Vol. %
Benzene-d ₆	2	Toluene-d ₈	7
Ethylbenzene-d ₁₀	2	Isooctane *	balance
Naphthalene-d ₈	1		

Performance Evaluation Standard

ASTM-P-0140-PES \$ 55 / 1 x 1 mL
 ASTM-P-0140-PES-PAK **SAVE 20%** \$ 220 / 5 x 1 mL
 11 comps.

	Target Vol. %
Benzene	1
1,2-Diethylbenzene	0.005
1,3,5-Trimethylbenzene	1
1-Methyl-2-ethylbenzene	1
Styrene	0.1
Indene	0.1
Biphenyl	0.1
1,2,4,5-Tetramethylbenzene	1
1,2,3,5-Tetramethylbenzene	1
Hexadecane	1
Isooctane:Toluene(1:1) *	balance

Composition of Daily QC Standard

ASTM-P-0140-QC \$ 125 / 1 x 10 mL
 ASTM-P-0140-QC-PAK **SAVE 20%** \$ 500 / 5 x 10 mL
 9 comps.

	Target Vol. %
Benzene	1
Toluene	10
Ethylbenzene	3
1,3-Dimethylbenzene	6
1,2-Dimethylbenzene	3
1,2,4-Trimethylbenzene	3
1,2-Diethylbenzene	0.02
Naphthalene	1
Isooctane (solvent) *	balance

[^] This component is a solid at room temperature

* The isooctane balance is the amount of material to make up a 100 mL calibration standard. Certificate will reflect actual weight of each component in the 100 mL batch including the isooctane.

ASTM D5771 Cloud Point of Petroleum Products

see page 275

ASTM D5772 Cloud Point of Petroleum Products (Linear Cooling Rate Method)

see page 275

ASTM D5773 Cloud Point of Petroleum Products (Constant Cooling Rate Method)

see page 275

ASTM D5836 Determination of Diisocyanates (1,2-PP Method)

Diisocyanate Sets

D-5836-SET \$ 175 / 9 x 1 mL
 D-5836-01N, D-5836-02N, D-5836-03N, D-5836-04N,
 D-5836-01-DER, D-5836-02-DER, D-5836-03-DER, D-5836-04-DER, D-5836-DER-5ML-VAP

Underivatized Diisocyanates

Compound	Unit	Cat. No.	Price	Diisocyanate Storage - Refrig 0-5° C
2,4-Toluene diisocyanate	100 mg	D-5836-01N	\$ 25	
2,6-Toluene diisocyanate	100 mg	D-5836-02N	25	
Hexamethylene diisocyanate	100 mg	D-5836-03N	25	
4,4'-Methylenebis(phenyl isocyanate)	100 mg	D-5836-04N	25	

Derivatized Diisocyanates (Weight Compensated to 1000 µg/mL of each Diisocyanate)

Compound	Cat. No.	Price / 1 mL
N,N'-(4-Methyl-1,3-phenylene)bis[4-(2-pyridinyl)-1-piperazinecarboxamide] 72375-21-4 (2,4-TDIP)	D-5836-01-DER 2840 µg/mL in DMSO	\$ 25
N,N'-(2-Methyl-1,3-phenylene)bis[4-(2-pyridinyl)-1-piperazinecarboxamide] (2,6-TDIP)	D-5836-02-DER 2840 µg/mL in DMSO	25
N,N'-1,6-Hexanediybis[4-(2-pyridinyl)-1-piperazinecarboxamide] 72375-27-0 (1,6-HDIP)	D-5836-03-DER 2900 µg/mL in DMSO	25
N,N'-(Methylenediphenylene)bis[4-(2-pyridinyl)-1-piperazinecarboxamide] 72375-24-7 (4,4'-MDIP)	D-5836-04-DER 2280 µg/mL in DMSO	25

Derivatizing Agents

1-(2-Pyridyl)piperazine
34803-66-2 D-5836-DER-5ML-VAP \$ 25 /
2 mg/mL in CH₂Cl₂ 4 x 5 mL

Individual Derivatized Diisocyanates

N,N'-(4-Methyl-1,3-phenylene)bis[4-(2-pyridinyl)-1-piperazinecarboxamide] 72375-21-4 (2,4-TDIP)	D-5836-01A-DER 1000 µg/mL in DMSO	\$ 25
N,N'-(2-Methyl-1,3-phenylene)bis[4-(2-pyridinyl)-1-piperazinecarboxamide] (2,6-TDIP)	D-5836-02A-DER 1000 µg/mL in DMSO	\$ 25
N,N'-1,6-Hexanediybis[4-(2-pyridinyl)-1-piperazinecarboxamide] 72375-27-0 (1,6-HDIP)	D-5836-03A-DER 1000 µg/mL in DMSO	\$ 25
N,N'-(Methylenediphenylene)bis[4-(2-pyridinyl)-1-piperazinecarboxamide] 72375-24-7 (4,4'-MDIP)	D-5836-04A-DER 1000 µg/mL in DMSO	\$ 25

ASTM D5863 Ni, V, Fe, & Na in Crude Oils & Residual Fuels by Flame AA Spectrometry

see

ASTM D5901 Freezing Point Aviation Fuels (Automated Optical Method)

see pages 274-275

ASTM D5972 Freezing Point Aviation Fuels (Automated Phase Transition Method)

see pages 274-275

ASTM D5986 Oxygenates, Benzene, Toluene, C8-C12, Aromatics & Total Aromatics in Finished Gasolines by GC/FTIR

Daily QC Standard

Without Internal Standard

M-GRA-QC-10ML \$ 125 / 1 x 10 mL
 M-GRA-QC-10ML-PAK SAVE 20% \$ 500 / 5 x 10 mL

	Wt. Ratio		Wt. Ratio
n-Hexane	12	Toluene	9
n-Heptane	17	Ethylbenzene	3
n-Octane	17	m-Xylene	3
n-Decane	12	o-Xylene	3
n-Dodecane	5	1,2,4-Trimethylbenzene	3
Isooctane	12	1,2,4,5-Tetramethylbenzene	3
Benzene	1	13 Comp. Core Mix	100

Technical Note

This quality control standard was formulated to meet Section 11 of ASTM D-5986 specifications stipulating to "analyze the quality control reference material before every batch of samples. Bracket the samples with the reference materials".

ASTM D6160 Polychlorinated Biphenyls (PCBs in Waste Materials by GC)

Aroclor Standards

Aroclor #	35 µg/mL in Isooctane		35 µg/mL in MeOH		1000 µg/mL in Hexane	
	Cat. No.	1 mL Price	Cat. No.	1 mL Price	Cat. No.	1 mL Price
Aroclor 1016	C-216S	\$ 15	C-216S-M	\$ 15	C-216S-H-10X	\$ 20
Aroclor 1221	C-221S	15	C-221S-M	15	C-221S-H-10X	20
Aroclor 1232	C-232S	15	C-232S-M	15	C-232S-H-10X	20
Aroclor 1242	C-242S	15	C-242S-M	15	C-242S-H-10X	20
Aroclor 1248	C-248S	15	C-248S-M	15	C-248S-H-10X	20
Aroclor 1254	C-254S	15	C-254S-M	15	C-254S-H-10X	20
Aroclor 1260	C-260S	15	C-260S-M	15	C-260S-H-10X	20
Aroclor 1262	C-262S	15	C-262S-M	15	C-262S-H-10X	20
Aroclor 1268	C-268S	15	C-268S-M	15	C-268S-H-10X	20

ASTM D6258 Solvent Red 164 Dye Concentration in Diesel Fuels

Stock Solvent Red 26 Standard

D-6258-CONC-5ML

\$ 45 / 1 x 5 mL

Solvent Red 26 @ 300 µg/mL in Xylene

D-6258 Calibration Curve

D-6258-5ML-SET

\$ 125 / 6 x 5 mL

Set includes the following Cat. No.'s

Description	Cat. No.	Unit
Xylene Blank	D-6258-BL	1 x 5 mL
Solvent Red 26 Dye @ 3 µg/mL in Xylene	D-6258-01	1 x 5 mL
Solvent Red 26 Dye @ 6 µg/mL in Xylene	D-6258-02	1 x 5 mL
Solvent Red 26 Dye @ 9 µg/mL in Xylene	D-6258-03	1 x 5 mL
Solvent Red 26 Dye @ 12 µg/mL in Xylene	D-6258-04	1 x 5 mL
Solvent Red 26 Dye @ 15 µg/mL in Xylene	D-6258-05	1 x 5 mL

Technical Note

Solvent Red 26 is the azo dye standard against which the concentration of Solvent Red 164 is measured. The visible spectrum of Solvent Red 164 is virtually identical to the spectrum of Solvent Red 26.

ASTM D6293 Oxygenates & Paraffin, Olefin, Naphthene, Aromatics (O-PONA) Hydrocarbon types in Low-Olefin Spark-Ignition Engine Fuels by GC

O-PONA System Validation Mixture

ASTM-P-0080

\$ 135 / 1 x 1 mL

ASTM-P-0080-PAK

SAVE 20% \$ 540 / 5 x 1 mL

33 comps.

	Wt./Wt. %		Wt./Wt. %
Cyclopentane	1.5	Benzene	2.5
<i>n</i> -Pentane	1.5	Toluene	2.5
Cyclohexane	2.0	<i>trans</i> -Decahydronaphthelene	3.5
2,3-Dimethylbutane	2.0	<i>n</i> -Tetradecane	2.0
<i>n</i> -Hexane	2.0	Ethylbenzene	3.5
1-Hexene	1.5	<i>o</i> -Xylene	3.0
Methylcyclohexane	3.5	<i>n</i> -Propylbenzene	3.5
4-Methyl-1-hexene	1.5	1,2,4-Trimethylbenzene	3.0
<i>n</i> -Heptane	3.0	1,2,3-Trimethylbenzene	2.0
<i>cis</i> -1,2-Dimethylcyclohexane	4.5	1,2,4,5-Tetramethylbenzene	2.0
Isooctane	4.0	Pentamethylbenzene	2.5
<i>n</i> -Octane	4.0	Ethanol	5.0
1,2,4-Trimethylcyclohexane	3.5	<i>t</i> -Butanol	4.0
<i>n</i> -Nonane	3.0	MtBE	8.0
<i>n</i> -Decane	3.5	ETBE	3.0
<i>n</i> -Undecane	2.0	TAME	5.0
<i>n</i> -Dodecane	2.0		

O-PONA Olefin Mix

ASTM-P-0081

\$ 45 / 1 x 1 mL

ASTM-P-0081-PAK

\$ 180 / 5 x 1 mL

At stated conc. in Hexane:Heptane (1:1)
5 comps.

	Wt./Wt. %
1-Pentene	5.0
1-Hexene	2.0
1-Heptene	2.0
1-Octene	2.0
1-Nonene	3.0

O-PONA Paraffin Mixes

ASTM-P-0082

\$ 25 / 1 x 1 mL

ASTM-P-0082-PAK

\$ 100 / 5 x 1 mL

At stated conc. in Hexane:Heptane (1:1)
2 comps.

	Wt./Wt. %
<i>n</i> -Nonane	5.0
<i>n</i> -Decane	2.0

ASTM-P-0082-R1

\$ 25 / 1 x 1 mL

ASTM-P-0082-R1-PAK \$ 100 / 5 x 1 mL

At stated conc. in Hexane:Heptane (1:1)
2 comps.

	Wt./Wt. %
<i>n</i> -Nonane	3.0
<i>n</i> -Decane	3.0

ASTM D6296 Total Olefins in Spark-Ignition Engine Fuels by Multidimensional GC

System Setup & Verification Standard Set

D-6296-VER-SET

\$ 40 / 2 x 1 mL

(D-6296-VER1, D-6296-VER2)

SAVE 20% \$ 160 / 5 x (2 x 1 mL)

D-6296-VER-SET-PAK

Set of 5 each (D-6296-VER1, D-6296-VER2)

System Setup & Verification 1

D-6296-VER1

1 x 1 mL

2 comps.

	Wt. %		Wt. %
MTBE	5%	Isooctane	95%

System Setup & Verification 2

D-6296-VER2

1 x 1 mL

2 comps.

	Wt. %		Wt. %
ETBE	5%	Isooctane	95%

Calibration Standard with MTBE

D-6296-CAL1

\$ 65 / 1 x 1 mL

D-6296-CAL1-PAK

SAVE 20% \$ 260 / 5 x 1 mL

10 comps.

	Wt. %		Wt. %
Pentene	1.0	Decene	1.0
Hexene	1.0	Undecane	1.0
Heptene	1.0	Dodecane	1.0
Octene	1.0	Isooctane	87.0
Nonene	1.0	MTBE	5.0

Calibration Standard with ETBE

D-6296-CAL2

\$ 65 / 1 x 1 mL

D-6296-CAL2-PAK

SAVE 20% \$ 260 / 5 x 1 mL

11 comps.

	Wt. %		Wt. %
Pentene	1.0	Decane	1.0
Hexene	1.0	Undecane	1.0
Heptene	1.0	Dodecane	1.0
Octene	1.0	Isooctane	86.0
Nonene	1.0	ETBE	5.0
Decene	1.0		

Isooctane Blank Compensation Standard

D-6296-BL

\$ 15 / 1 x 5 mL

Isooctane (Neat)

ASTM D6304 Determination of Water in Petroleum Products Lubricating oil, and additives by Coulometric Karl Fischer Titration

see pages 275, 312

ASTM D6334 Sulfur in Gasoline by Wavelength Dispersive X-Ray Fluorescence

see pages 276-279

ASTM D6352 Boiling Range Distribution of Petroleum Distillates from 174 to 700°C by GC

Polywax 500®

ASTM-P-0051N-2G

\$ 20 / 2 grams

Polywax 500

Polywax 850®

ASTM-P-0137N-2G

\$ 20 / 2 grams

Polywax 850

Polywax 655®

ASTM-P-0053N-2G

\$ 20 / 2 grams

Polywax 655

Polywax 1000®

ASTM-P-0138N-2G

\$ 20 / 2 grams

Polywax 1000

Hydrocarbon Window Defining Standard

DRH-008S-R2

\$ 65 / 1 x 1 mL

DRH-008S-R2-PAK

SAVE 20% \$ 260 / 5 x 1 mL

500 µg/mL each in Chloroform

35 comps.

Octane	Nonadecane	Triacontane
Nonane	Phytane	<i>n</i> -Hentriacontane
Decane	Eicosane	Dotriacontane
Undecane	Heneicosane	Tritriacontane
Dodecane	Docosane	Tetraatriacontane
Tridecane	Tricosane	Pentatriacontane
Tetradecane	Tetracosane	Hexatriacontane
Pentadecane	Pentacosane	Heptatriacontane
Hexadecane	Hexacosane	Octatriacontane
Heptadecane	Heptacosane	Nonatriacontane
Octadecane	Octacosane	Tetracontane
Pristane	Nonacosane	

Calibration Mix

DRH-002N

\$ 30 / 100 mg

DRH-002N-10X

\$ 40 / 1 gm

17 comps.

	Wt. %		Wt. %
<i>n</i> -Hexane	6	<i>n</i> -Octadecane	5
<i>n</i> -Heptane	6	<i>n</i> -Eicosane	2
<i>n</i> -Octane	8	<i>n</i> -Tetracosane	2
<i>n</i> -Nonane	8	<i>n</i> -Octacosane	1
<i>n</i> -Decane	12	<i>n</i> -Dotriacontane	1
<i>n</i> -Undecane	12	<i>n</i> -Hexatriacontane	1
<i>n</i> -Dodecane	12	<i>n</i> -Tetracontane	1
<i>n</i> -Tetradecane	12	<i>n</i> -Tetraetracontane	1
<i>n</i> -Hexadecane	10		

Column Test Mixture

D-2887

\$ 10 / 1 x 1 mL

1% wt./v in *n*-Octane

2 comps.

n-Hexadecane *n*-Octadecane



ASTM D6378 Vapor Pressure (VPx) of Petroleum Products, Hydrocarbons, & Hydrocarbon-Oxygenate Mixtures (Triple Expansion Method)

see page 289

ASTM D6379 Aromatic Hydrocarbon Types in Aviation Fuels & Petroleum Distillates - HPLC method with Refractive Index

System Resolution Standards

D-6379-SRS \$ 40 / 1 x 1 mL

D-6379-SRS-PAK **SAVE 20%** \$ 160 / 5 x 1 mL

At stated conc. (mg/mL) in n-Heptane 3 comps.

Cyclohexane	10
o-Xylene	0.5
1-Methyl naphthalene	0.05

D-6379-SRS-R1 \$ 40 / 1 x 1 mL

D-6379-SRS-R1-PAK **SAVE 20%** \$ 160 / 5 x 1 mL

At stated conc. (mg/mL) in n-Heptane 3 comps.

Cyclohexane	10
o-Xylene	5
1-Methyl naphthalene	0.5

Calibration Curves

D-6379-SET \$ 100 / 4 x 1 mL

D-6379-SET-PAK **SAVE 20%** \$ 400 / 5 x (4 x 1 mL)

At stated conc. (mg/mL) in n-Heptane

Analyte	Std. 1	Std. 2	Std. 3	Std. 4
Cyclohexane	5	2	0.5	0.1
o-Xylene	15	5	1.0	0.1
1-Methyl naphthalene	5	1.0	0.2	0.05

D-6379-10X-SET \$ 100 / 4 x 1 mL

D-6379-10X-SET-PAK **SAVE 20%** \$ 400 / 5 x (4 x 1 mL)

At stated conc. (mg/mL) in n-Heptane

Analyte	Std. 1	Std. 2	Std. 3	Std. 4
Cyclohexane	50	20	5	1
o-Xylene	150	50	10	1
1-Methyl naphthalene	50	10	2	0.5

ASTM D6417 Estimation of Engine Oil Volatility by Capillary GC

see page 309

ASTM D6428 Sulfur by Combustion and Electrochemical Detection

D-6428-R1-100ML-SET

\$ 300 / 7 x 100 mL

D-6428-R1-SET

\$ 65 / 7 x 1 mL

In Isooctane

Description	D-6428-R1-100ML-SET 7 x 100 mL	D-6428-R1-SET 7 x 1 mL
Sulfur Blank	D-6428-BL-100ML	D-6428-BL
Sulfur @ 0.1 µg/g	D-6428-0.1X-100ML	D-6428-0.1X
Sulfur @ 0.5 µg/g	D-6428-0.5X-100ML	D-6428-0.5X
Sulfur @ 1.0 µg/g	D-6428-1X-100ML	D-6428-1X
Sulfur @ 2.5 µg/g	D-6428-2.5X-100ML	D-6428-2.5X
Sulfur @ 5.0 µg/g	D-6428-5X-100ML	D-6428-5X
Sulfur @ 10 µg/g	D-6428-10X-100ML	D-6428-10X

D-6428-R2-100ML-SET

\$ 275 / 6 x 100 mL

D-6428-R2-SET

\$ 65 / 6 x 1 mL

In Isooctane

Description	D-6428-R2-100ML-SET 6 x 100 mL	D-6428-R2-SET 6 x 1 mL
Sulfur Blank	D-6428-BL-100ML	D-6428-BL
Sulfur @ 10 µg/g	D-6428-10X-100ML	D-6428-10X
Sulfur @ 25 µg/g	D-6428-25X-100ML	D-6428-25X
Sulfur @ 50 µg/g	D-6428-50X-100ML	D-6428-50X
Sulfur @ 75 µg/g	D-6428-75X-100ML	D-6428-75X
Sulfur @ 100 µg/g	D-6428-100X-100ML	D-6428-100X

Technical Note

Sulfur introduced using di-n-butyl sulfide

ASTM D6443 Ca, Cl, Cu, Mg, P, S, Zn in Unused Lubricating Oils & Additives by Wave-length Dispersive X-ray Fluorescence & Spectrometry

see pages 403-404

ASTM D6445 Sulfur in Gasoline by ED - XRF

see pages 276-279

ASTM D6481 P, S, Ca and Zn in Lube Oils by ED-XRF

see pages 402-403

ASTM D6550 Olefin Content of Gasolines by SFC

Stock Olefin Calibration Standard

D-6550-CONC

\$ 80 / 1 x 1 mL

D-6550-CONC-5ML

\$ 350 / 1 x 5 mL

At stated Conc. by Wt. %

15 comps.

	Wt. %		Wt. %		Wt. %
1-Nonene	2.5	2-Methyl-1,3-butadiene	5	2-Methyl-2-pentene	10
Cyclohexene	5	4-Methyl-1-pentene	5	1-Heptene	10
1-Hexene	5	1,5-Hexadiene	3	2-Methyl-1-octene	2.5
1-Octene	5	3-Methyl-1,3-pentadiene	2	2-Methyl-1-heptene	5
1-Decene	5	2-Methyl-1-butene	25	5-Methyl-1-hexene	10

ASTM D6584 / EN 14105 Free and Total Glycerin in Biodiesel by GC

Compound	Conc.	Matrix	Cat. No.	Price / Unit
Glycerin	0.5 mg/mL	Pyridine	BF-D-6584-01	\$ 25 / 2 mL
Monoolein	5 mg/mL	Pyridine	BF-D-6584-02	25 / 2 mL
1,3-Diolein	5 mg/mL	Pyridine	BF-D-6584-03	25 / 2 mL
Triolein	5 mg/mL	Pyridine	BF-D-6584-04	25 / 2 mL
(S)-(-)-1,2,4-Butanetriol	1 mg/mL	Pyridine	BF-D-6584-05-IS	145 / 5 mL
Tricaprin	8 mg/mL	Pyridine	BF-D-6584-06	145 / 5 mL
MSTFA	5 mL	Neat	BF-D-6584-07N	145 / 5 mL
Set of 7 above compounds			BF-D-6584-SET	450 / 7 units

ASTM D6584 Mixture

BF-D-6584-MIX \$ 225 / 1 x 5 mL
At stated conc. in Pyridine 6 comps.

Glycerol	0.5 mg/mL
Monoolein	5 mg/mL
1,3-Diolein	5 mg/mL
Trioctadecenoin (Olein)	5 mg/mL
(S)-(-)-1,2,4-Butanetriol	1 mg/mL
Tricaprin	8 mg/mL

Note: MSTFA (BF-D-6584-07N) can be ordered separately.

Mix of above compounds, on right (MSTFA separate)

Biofuel 20	0.5 mg/mL	CH ₂ Cl ₂	BF-FU-030-D	10 / 2 mL
	20 mg/mL	CH ₂ Cl ₂	BF-FU-030-D-40X	20 / 2 mL
Biofuel 100 Consumer grade	0.5 mg/mL	CH ₂ Cl ₂	BF-FU-029-D	20 / 2 mL
	20 mg/mL	CH ₂ Cl ₂	BF-FU-029-40X	45 / 2 mL
Biofuel 100	0.5 mg/mL	CH ₂ Cl ₂	BF-FU-032-D	20 / 2 mL
	20 mg/mL	CH ₂ Cl ₂	BF-FU-032-D-40X	45 / 2 mL

ASTM D6591 (IP 391) Aromatic Hydrocarbon Types in Middle Distillates - HPLC method with Refractive Index Detection

System Performance Standard

ASTM-P-0135 \$ 75 / 1 x 5 mL

ASTM-P-0135-PAK **SAVE 20%** \$ 300 / 5 x 5 mL

At stated conc. (mg/mL) in *n*-Heptane 4 comps.

Cyclohexane	10
<i>o</i> -Xylene	5.0
Dibenzothiophene	0.5
9-Methylanthracene	0.5

IP 391-95 Calibration Curve

ASTM-P-0136-SET \$ 145 / 4 x 1 mL

At stated conc. (mg/mL) in *n*-Heptane

Analyte	Std. 1	Std. 2	Std. 3	Std. 4
Cyclohexane	50	20	5	1
<i>o</i> -Xylene	40	10	2.5	0.5
1-Methyl naphthalene	40	10	2.5	0.2
Phenanthrene	4	2	0.5	0.1



ASTM D6751 & ASTM D5453 Sulfur as Di-n-butyl sulfide in Biodiesel

Sulfur in Biodiesel 5%

ppm (µg/g)	% Wt.	Cat. No.	Price / 100 mL
0	0	BF-5453-B5-BL	\$ 65
5	0.0005	BF-5453-B5-5X-SET	80 / 2 x 100 mL
10	0.001	BF-5453-B5-10X-SET	80 / 2 x 100 mL
15	0.0015	BF-5453-B5-15X-SET	80 / 2 x 100 mL
30	0.003	BF-5453-B5-30X	65
50	0.005	BF-5453-B5-50X	65
75	0.0075	BF-5453-B5-75X	65
100	0.01	BF-5453-B5-100X	65
200	0.02	BF-5453-B5-200X	65
500	0.05	BF-5453-B5-500X	65

Sulfur in Biodiesel 100%

ppm (µg/g)	% Wt.	Cat. No.	Price / 100 mL
0	0	BF-5453-B100-BL	\$ 65
5	0.0005	BF-5453-B100-5X-SET	80 / 2 x 100 mL
10	0.001	BF-5453-B100-10X-SET	80 / 2 x 100 mL
15	0.0015	BF-5453-B100-15X-SET	80 / 2 x 100 mL
30	0.003	BF-5453-B100-30X	65
50	0.005	BF-5453-B100-50X	65
75	0.0075	BF-5453-B100-75X	65
100	0.01	BF-5453-B100-100X	65
200	0.02	BF-5453-B100-200X	65
500	0.05	BF-5453-B100-500X	65

Sulfur in Biodiesel 20%

ppm (µg/g)	% Wt.	Cat. No.	Price / 100 mL
0	0	BF-5453-B20-BL	\$ 65
5	0.0005	BF-5453-B20-5X-SET	80 / 2 x 100 mL
10	0.001	BF-5453-B20-10X-SET	80 / 2 x 100 mL
15	0.0015	BF-5453-B20-15X-SET	80 / 2 x 100 mL
30	0.003	BF-5453-B20-30X	65
50	0.005	BF-5453-B20-50X	65
75	0.0075	BF-5453-B20-75X	65
100	0.01	BF-5453-B20-100X	65
200	0.02	BF-5453-B20-200X	65
500	0.05	BF-5453-B20-500X	65

Technical Note

The 5, 10 and 15 ppm sulfurs are supplied as a set including a blank. We suggest using the blank for analysis to compensate for matrix interferences, such as low levels of native sulfur.

Technical Note

All products are refinery grade stock, unless specifically marked consumer grade.

Note: 10,000 ppm = 1% Wt.

As the matrix may contain some native sulfur, AccuStandard encourages purchasing sulfur blanks for calibration analysis

Physical Standards

Compound	Conc.	Matrix	Cat. No.	Unit	Price
ASTM D2500					
Cloud Point	-16 °C *	B5	BF-D-2500-B5	200 mL	\$ 120
	-14 °C *	B20	BF-D-2500-B20	200 mL	120
	-1 °C *	B100	BF-D-2500-B100	200 mL	120
ASTM D93 / EN-ISO 3679					
Flash Point	60 °C *		BF-D-93-60C	200 mL	140
	65 °C *		BF-D-93-65C	200 mL	140
	140 °C *		BF-D-93-140C	200 mL	140
ASTM D4951 / EN 14107					
Phosphorus Content	0.001 % Wt.	B100	BF-D-4951-B100	100 g	200
ASTM D6304 / EN ISO 12937					
(KF) Water Content	60 µg/g		BF-KF-0.6X-5ML-VAP	10 x 5 mL	70
	100 µg/g		BF-KF-1X-5ML-VAP	10 x 5 mL	50
	1000 µg/g		BF-KF-10X-5ML-VAP	10 x 5 mL	50
	5000 µg/g		BF-KF-50X-5ML-VAP	10 x 5 mL	50
ASTM D6751 / UOP 391 / EN 14108 / EN 14109					
Sodium / Potassium	100 ppm	B100	BF-UOP-391-B100	100 g	225
EN 14538					
Calcium / Magnesium	100 ppm	B100	BF-14538-B100	100 g	225

* These are nominal values and the actual value will be recorded on the certificate.



AccuStandard stands for accuracy in Cloud Points.

UOP (Universal Oil Products) methods were developed to facilitate the refining industry in analyzing refinery feeds, products and process streams for composition, purity and physical and chemical properties. In addition to the products listed below, AccuStandard can custom formulate products to fit your exact needs. Please contact our Technical Service Department for additional information.

UOP Method 543 Standard

Non-Aromatic Hydrocarbons in High-Purity Aromatics by GC.

UOP-M-543-PAK \$ 50 / 5 x 1 mL
At stated Wt./Wt.% 2 comps.

	Wt./Wt.%
n-Dodecane	70
Toluene	30

UOP Method 551 Standard

Hexanes and Lower-Boiling Hydrocarbons in Olefin-Free Gasolines by GC. May also be used for UOP Method 690 - Octanes and Lower Boiling Hydrocarbons in Olefin-Free Gasolines by GC.

UOP-M-551-PAK \$ 50 / 5 x 1 mL
Equal Mass % 7 comps.

n-Hexane	o-Xylene
Benzene	m-Xylene
Toluene	p-Xylene
Ethylbenzene	

UOP Method 660 Standard

UOP-M-660-PAK \$ 50 / 5 x 1 mL

1% in Water

UOP-M-660-10X-PAK \$ 50 / 5 x 1 mL

10% in Water

UOP-M-660-0.1X-PAK \$ 50 / 5 x 1 mL

1000 ppm in Water

Tetramethylene sulfone

UOP Method 720 Standard

Impurities in High Purity p-Xylene by GC.

UOP-M-720-PAK \$ 50 / 5 x 1 mL
At stated Mass % 5 comps.

	Mass %
o-Xylene	0.1
m-Xylene	0.1
Ethylbenzene	0.1
n-Undecane	1.0
p-Xylene	98.7

UOP Method 744 Standard

Aromatics in Hydrocarbons by GC.

UOP-M-744-PAK \$ 50 / 5 x 1 mL
At stated Wt./Wt.% 8 comps.

	Wt./Wt.%
n-Heptane	25
Benzene	15
Toluene	20
m-Xylene	6.7
o-Xylene	6.6
p-Xylene	6.7
o-Ethyltoluene	10
1,2,3,4-Tetramethylbenzene	10

UOP Method 831 Standard

UOP-M-831-PAK \$ 50 / 5 x 1 mL
10 µg/g each in Sulfolane 5 comps.

Benzene	Isopropylbenzene
Toluene	n-Nonane
Ethylbenzene	

UOP Method 868 Standard

Trace Saturates in High Purity Aromatics by GC.

UOP-M-868-PAK \$ 50 / 5 x 1 mL
Stated conc. in Toluene 10 comps.

	µg/g
n-Butylcyclohexane	500
n-Propylcyclohexane	400
n-Decane	500
n-Nonane	500
n-Octane	300
n-Hexane	100
Ethylcyclohexane	300
Cyclohexane	100
n-Heptane	200
Methylcyclohexane	200

UOP Method 931 Standard

Trace Impurities in Mixed Xylenes by GC.

UOP-M-931-PAK \$ 50 / 5 x 1 mL
At stated Wt./Wt.% 5 comps.

	Wt./Wt.%
Benzene	2.0
Toluene	2.0
o-Ethyltoluene	2.0
n-Undecane	2.0
n-Heptane	92.0

Miscellaneous Petroleum

Skinner List for Refinery Waste

Semi-Volatiles

Base/Neutral Extractables

M-005B	\$ 150 / 1 x 1 mL
M-005B-PAK	SAVE 20% \$ 600 / 5 x 1 mL
<i>0.2 mg/mL each in CH₂Cl₂</i>	
M-005B-10X	\$ 200 / 1 x 1 mL
M-005B-10X-PAK	SAVE 20% \$ 800 / 5 x 1 mL
<i>2.0 mg/mL each in CH₂Cl₂</i>	
	27 comps.

Anthracene	7,12-Dimethylbenz[a]anthracene
Benzo[a]anthracene	Dimethyl phthalate
Benzo[b]fluoranthene	Di- <i>n</i> -butyl phthalate
Benzo[k]fluoranthene	Di- <i>n</i> -octyl phthalate
Benzo[a]pyrene	Indene
bis(2-Ethylhexyl)phthalate	Fluoranthene
Butyl benzyl phthalate	6-Methylchrysene
Chrysene	1-Methylnaphthalene
Dibenz[a,h]acridine	Naphthalene
Dibenz[a,h]anthracene	Phenanthrene
<i>o</i> -Dichlorobenzene	Pyrene
<i>m</i> -Dichlorobenzene	Pyridine
<i>p</i> -Dichlorobenzene	Quinoline
Diethyl phthalate	

Acid Extractables

M-005A	\$ 35 / 1 x 1 mL
M-005A-PAK	SAVE 20% \$ 140 / 5 x 1 mL
<i>0.2 mg/mL each in CH₂Cl₂</i>	
M-005A-10X	\$ 40 / 1 x 1 mL
M-005A-10X-PAK	SAVE 20% \$ 160 / 5 x 1 mL
<i>2.0 mg/mL each in CH₂Cl₂</i>	
<i>o</i> -Cresol	2,4-Dinitrophenol
<i>m</i> -Cresol	4-Nitrophenol
<i>p</i> -Cresol	Phenol
2,4-Dimethylphenol	Thiophenol

Volatiles

M-005V	\$ 35 / 1 x 1 mL
M-005V-PAK	SAVE 20% \$ 140 / 5 x 1 mL
<i>0.2 mg/mL each in MeOH</i>	
M-005V-10X	\$ 40 / 1 x 1 mL
M-005V-10X-PAK	SAVE 20% \$ 160 / 5 x 1 mL
<i>2.0 mg/mL each in MeOH</i>	
Benzene	Ethylene dibromide
Carbon disulfide	Methyl ethyl ketone
Chlorobenzene	Styrene
Chloroform	Toluene
1,2-Dichloroethane	<i>o</i> -Xylene
1,4-Dioxane	<i>m</i> -Xylene
Ethyl benzene	<i>p</i> -Xylene

Resolution Check for Fire Debris Analysis

ASTM E1387 Resolution Check Mix

ASTM-E1387	\$ 30 / 1 x 1 mL
ASTM-E1387-PAK	SAVE 20% \$ 120 / 5 x 1 mL
<i>2.0 mg/mL each in CH₂Cl₂</i>	
	13 comps.

Decane	Hexadecane	Tetradecane
Dodecane	Hexane	Toluene
Eicosane	Octadecane	1,2,4-Trimethylbenzene
2-Ethyltoluene	Octane	<i>p</i> -Xylene
3-Ethyltoluene		

ASTM E1618 Test Mix for Fire Debris Analysis

ASTM-E1618	\$ 35 / 1 x 1 mL
ASTM-E1618-PAK	SAVE 20% \$ 140 / 5 x 1 mL
<i>0.05% v/v (0.50 µL/mL) each in CH₂Cl₂</i>	
	13 comps.

<i>n</i> -Decane	<i>n</i> -Hexadecane	<i>n</i> -Tetradecane
<i>n</i> -Dodecane	<i>n</i> -Hexane	Toluene
<i>n</i> -Eicosane	<i>n</i> -Octadecane	1,2,4-Trimethylbenzene
<i>o</i> -Ethyltoluene	<i>n</i> -Octane	<i>p</i> -Xylene
<i>m</i> -Ethyltoluene		



ASTM, EN and other test methods have been developed to monitor the properties (physical and chemical), constituent distribution, impurities and suitability of use.

The source materials that are used to produce these fuels vary from plant oils, ethyl alcohol (usually from corn) and even waste products.

Biodiesel refineries have opened all over the world.

- The Minister for the Environment and Heritage of Australia has signed the Fuel Standard (Biodiesel) in 2006 which sets out the physical and chemical parameters with the associated test methods to determine compliance.
- In Germany the sale of biodiesel in gas stations is over 2 million cubic meters.
- In the USA, some state legislatures have mandated 2% biodiesel content in all diesels sold in those states.

ASTM D6584 / EN 14105 Free and Total Glycerin in Biodiesel by GC

Compound	Qty. /	Conc.	Matrix	Cat. No.	Price / Unit
Glycerin	0.5	mg/mL	Pyridine	BF-D-6584-01	\$ 25 / 2 mL
Monoolein	5	mg/mL	Pyridine	BF-D-6584-02	25 / 2 mL
1,3-Diolein	5	mg/mL	Pyridine	BF-D-6584-03	25 / 2 mL
Triolein	5	mg/mL	Pyridine	BF-D-6584-04	25 / 2 mL
(S)-(-)-1,2,4-Butanetriol	1	mg/mL	Pyridine	BF-D-6584-05-IS	145 / 5 mL
Tricaprin	8	mg/mL	Pyridine	BF-D-6584-06	145 / 5 mL
MSTFA	5	mL	Neat	BF-D-6584-07N	145 / 5 mL
Set of 7 above compounds				BF-D-6584-SET	450 / 7 units
Mix of above compounds, on right (MSTFA separate)					
Biofuel 20	0.5	mg/mL	CH ₂ Cl ₂	BF-FU-030-D	10 / 2 mL
	20	mg/mL	CH ₂ Cl ₂	BF-FU-030-D-40X	20 / 2 mL
Biofuel 100 Consumer grade	0.5	mg/mL	CH ₂ Cl ₂	BF-FU-029-D	20 / 2 mL
	20	mg/mL	CH ₂ Cl ₂	BF-FU-029-40X	45 / 2 mL
Biofuel 100	0.5	mg/mL	CH ₂ Cl ₂	BF-FU-032-D	20 / 2 mL
	20	mg/mL	CH ₂ Cl ₂	BF-FU-032-D-40X	45 / 2 mL

ASTM D6584 Mixture

BF-D-6584-MIX \$ 225 / 1 x 5 mL
At stated conc. in Pyridine 6 comps.

Glycerol	0.5 mg/mL
Monoolein	5 mg/mL
1,3-Diolein	5 mg/mL
Trioctadecenoin (Olein)	5 mg/mL
(S)-(-)-1,2,4-Butanetriol	1 mg/mL
Tricaprin	8 mg/mL

Note: MSTFA (BF-D-6584-07N) can be ordered separately.

EN 14103 Fatty Acid Methyl Esters (FAMES)

The methyl esters in the mixture are those derived from typical glycerides present in biomass sources.

Soy & Corn

BF-SOY-ME	\$ 145 / 100 mg
16:0 Palmitate	6% Wt.
18:0 Stearate	3% Wt.
20:0 Arachidate	3% Wt.
18:1 Oleate	35% Wt.
18:2 Linoleate	50% Wt.
18:3 Linolenate	3% Wt.

Palm Kernel

BF-PALM-ME	\$ 200 / 100 mg
8:0 Caprylate	7% Wt.
10:0 Caprate	5% Wt.
12:0 Laurate	48% Wt.
14:0 Myristate	15% Wt.
16:0 Palmitate	7% Wt.
18:0 Stearate	3% Wt.
18:1 Oleate	12% Wt.
18:2 Linoleate	3% Wt.

Percent Methanol Calibration Standard Set (EN 14110)

BF-MEOH-SET	\$ 65 / 5 x 1 mL
BF-MEOH-1X (100 µg/g)	BF-MEOH-25X (2500 µg/g)
BF-MEOH-5X (500 µg/g)	BF-MEOH-50X (5000 µg/g)
BF-MEOH-10X (1000 µg/g)	
Methanol in Water	

Rapeseed Oil

BF-RAP-ME	\$ 200 / 100 mg
14:0 Myristate	1% Wt.
16:0 Palmitate	4% Wt.
18:0 Stearate	3% Wt.
20:0 Arachidate	3% Wt.
22:0 Behenate	3% Wt.
24:0 Lignocerate	3% Wt.
18:1 Oleate	60% Wt.
22:1 Erucate	5% Wt.
18:2 Linoleate	12% Wt.
18:3 Linolenate	5% Wt.
20:1 Eicosenoate	1% Wt.

Beef Tallow & Palm Oil

BF-BT-ME	\$ 175 / 100 mg
14:0 Myristate	2% Wt.
16:0 Palmitate	30% Wt.
16:1 Palmitoleate	3% Wt.
18:0 Stearate	14% Wt.
18:1 Oleate	41% Wt.
18:2 Linoleate	7% Wt.
18:3 Linolenate	3% Wt.

Technical Note

All products are refinery grade stock, unless specifically marked consumer grade.

Technical Note

Individual Mixes packaged under Nitrogen for stability.



Fatty Acid Ethyl Esters (FAEEs)

Ethyl Esters in Soy & Corn

BF-SOY-EE	\$ 185 / 100 mg
16:0 Ethyl palmitate	6% Wt.
18:0 Ethyl stearate	3% Wt.
20:0 Ethyl arachidate	3% Wt.
18:1 Ethyl oleate	35% Wt.
18:2 Ethyl linoleate	50% Wt.
18:3 Ethyl linolenate	3% Wt.

Ethyl Esters in Palm Kernel Oil

BF-PALM-EE	\$ 250 / 100 mg
8:0 Ethyl caprylate	7% Wt.
10:0 Ethyl caprate	5% Wt.
12:0 Ethyl laurate	48% Wt.
14:0 Ethyl myristate	15% Wt.
16:0 Ethyl palmitate	7% Wt.
18:0 Ethyl stearate	3% Wt.
18:1 Ethyl oleate	12% Wt.
18:2 Ethyl linoleate	3% Wt.

Ethyl Esters in Rapeseed Oil

BF-RAP-EE	\$ 250 / 100 mg
14:0 Ethyl myristate	1% Wt.
16:0 Ethyl palmitate	4% Wt.
18:0 Ethyl stearate	3% Wt.
20:0 Ethyl arachidate	3% Wt.
22:0 Ethyl behenate	3% Wt.
24:0 Ethyl lignocerate	3% Wt.
18:1 Ethyl oleate	60% Wt.
22:1 Ethyl erucate	5% Wt.
18:2 Ethyl linoleate	12% Wt.
18:3 Ethyl linolenate	5% Wt.
20:1 Ethyl eicosenoate	1% Wt.

Ethyl Esters in Beef Tallow

BF-BT-EE	\$ 225 / 100 mg
14:0 Ethyl myristate	2% Wt.
16:0 Ethyl palmitate	30% Wt.
16:1 Ethyl palmitoleate	3% Wt.
18:0 Ethyl stearate	14% Wt.
18:1 Ethyl oleate	41% Wt.
18:2 Ethyl linoleate	7% Wt.
18:3 Ethyl linolenate	3% Wt.

Compound	Neat (100 mg)		Solution (10 mg/mL in Hexane)	
	Cat. No.	Price	Cat. No.	Price / 1 mL
Ethyl palmitate (16:0)	FAEE-006N	\$ 15	FAEE-006S	\$ 15
Ethyl stearate (18:0)	FAEE-007N	15	FAEE-007S	15
Ethyl arachidate (20:0)	FAEE-008N	15	FAEE-008S	15
Ethyl oleate (18:1)	FAEE-014N	15	FAEE-014S	15
Ethyl linoleate (18:2)	FAEE-012N	15	FAEE-012S	15
Ethyl linolenate (18:3)	FAEE-016N	15	FAEE-016S	15
Ethyl myristate (14:0)	FAEE-005N	15	FAEE-005S	15
Ethyl behenate (22:0)	FAEE-009N	15	FAEE-009S	15
Ethyl lignocerate (24:0)	FAEE-010N	25	FAEE-010S	25
Ethyl erucate (22:1)	FAEE-011N	15	FAEE-011S	15
Ethyl caprylate (8:0)	FAEE-002N	15	FAEE-002S	15
Ethyl caprate (10:0)	FAEE-003N	15	FAEE-003S	15
Ethyl laurate (12:0)	FAEE-004N	15	FAEE-004S	15
Ethyl palmitoleate (16:1)	FAEE-001N	15	FAEE-001S	15
Ethyl nervonate (24:1)	FAEE-013N	25	FAEE-013S	25
Ethyl heptadecanoate (17:0)	FAEE-015N	15	FAEE-015S	15
Ethyl linolenate (gamma) (18:3)	FAEE-020N	35	FAEE-020S	35

ASTM D6751 & ASTM D5453 Sulfur as Di-n-butyl sulfide in Biodiesel

Sulfur in Biodiesel 5%

ppm (µg/g)	% Wt.	Cat. No.	Price / 100 mL
0	0	BF-5453-B5-BL	\$ 65
5	0.0005	BF-5453-B5-5X-SET	80 / 2 x 100 mL
10	0.001	BF-5453-B5-10X-SET	80 / 2 x 100 mL
15	0.0015	BF-5453-B5-15X-SET	80 / 2 x 100 mL
30	0.003	BF-5453-B5-30X	65
50	0.005	BF-5453-B5-50X	65
75	0.0075	BF-5453-B5-75X	65
100	0.01	BF-5453-B5-100X	65
200	0.02	BF-5453-B5-200X	65
500	0.05	BF-5453-B5-500X	65

Sulfur in Biodiesel 100%

ppm (µg/g)	% Wt.	Cat. No.	Price / 100 mL
0	0	BF-5453-B100-BL	\$ 65
5	0.0005	BF-5453-B100-5X-SET	80 / 2 x 100 mL
10	0.001	BF-5453-B100-10X-SET	80 / 2 x 100 mL
15	0.0015	BF-5453-B100-15X-SET	80 / 2 x 100 mL
30	0.003	BF-5453-B100-30X	65
50	0.005	BF-5453-B100-50X	65
75	0.0075	BF-5453-B100-75X	65
100	0.01	BF-5453-B100-100X	65
200	0.02	BF-5453-B100-200X	65
500	0.05	BF-5453-B100-500X	65

Sulfur in Biodiesel 20%

ppm (µg/g)	% Wt.	Cat. No.	Price / 100 mL
0	0	BF-5453-B20-BL	\$ 65
5	0.0005	BF-5453-B20-5X-SET	80 / 2 x 100 mL
10	0.001	BF-5453-B20-10X-SET	80 / 2 x 100 mL
15	0.0015	BF-5453-B20-15X-SET	80 / 2 x 100 mL
30	0.003	BF-5453-B20-30X	65
50	0.005	BF-5453-B20-50X	65
75	0.0075	BF-5453-B20-75X	65
100	0.01	BF-5453-B20-100X	65
200	0.02	BF-5453-B20-200X	65
500	0.05	BF-5453-B20-500X	65

Technical Note

The 5, 10 and 15 ppm sulfurs are supplied as a set including a blank. We suggest using the blank for analysis to compensate for matrix interferences, such as low levels of native sulfur.

Technical Note

All products are refinery grade stock, unless specifically marked consumer grade.

Note: 10,000 ppm = 1% Wt.



Physical Standards

Compound	Conc.	Matrix	Cat. No.	Unit	Price
ASTM D2500					
Cloud Point	-16 °C *	B5	BF-D-2500-B5	200 mL	\$ 120
	-14 °C *	B20	BF-D-2500-B20	200 mL	120
	-1 °C *	B100	BF-D-2500-B100	200 mL	120
ASTM D93 / EN-ISO 3679					
Flash Point	60 °C *		BF-D-93-60C	200 mL	140
	65 °C *		BF-D-93-65C	200 mL	140
	140 °C *		BF-D-93-140C	200 mL	140
ASTM D4951 / EN 14107					
Phosphorus Content	0.001 % Wt.	B100	BF-D-4951-B100	100 g	200
ASTM D6304 / EN ISO 12937					
(KF) Water Content	60 µg/g		BF-KF-0.6X-5ML-VAP	10 x 5 mL	70
	100 µg/g		BF-KF-1X-5ML-VAP	10 x 5 mL	50
	1000 µg/g		BF-KF-10X-5ML-VAP	10 x 5 mL	50
	5000 µg/g		BF-KF-50X-5ML-VAP	10 x 5 mL	50
ASTM D6751 / UOP 391 / EN 14108 / EN 14109					
Sodium / Potassium	100 ppm	B100	BF-UOP-391-B100	100 g	225
EN 14538					
Calcium / Magnesium	100 ppm	B100	BF-14538-B100	100 g	225

* These are nominal values and the actual value will be recorded on the certificate.



AccuStandard stands for accuracy in Cloud Points.

EN 14214 Wear Metals

Each is 100 grams at 500 µg/g concentration.

Compound	Matrix	Cat. No.	Price / 100 grams
Aluminum	B100	BF-WM-B100-01-0.5X	200
Calcium	B100	BF-WM-B100-09-0.5X	200
Chromium	B100	BF-WM-B100-13-0.5X	200
Copper	B100	BF-WM-B100-15-0.5X	200
Iron	B100	BF-WM-B100-27-0.5X	200
Lead	B100	BF-WM-B100-29-0.5X	200
Magnesium	B100	BF-WM-B100-32-0.5X	200
Phosphorus	B100	BF-WM-B100-41-0.5X	200
Potassium	B100	BF-WM-B100-43-0.5X	200
Sodium	B100	BF-WM-B100-54-0.5X	200
Zinc	B100	BF-WM-B100-70-0.5X	200

Technical Note

Formulations for EN 12916, other methods and custom formulations are available.

Biofuel Blank

B100

BF-WM-B100-BL-1	\$ 85 / 100 g
BF-WM-B100-BL-5	\$ 125 / 500 g

Biofuel Metals Mix

Multi-Element Biofuel Standard

BF-WM-B100-MIX1	\$ 275 / 100 g
200 µg/g each in B100	5 comps.

Ca (Calcium)	Na (Sodium)
K (Potassium)	P (Phosphorus)
Mg (Magnesium)	

Technical Note

Algae, as a biofuel feedstock, yields energy balances higher than even soybeans. (source: "Widescale Biodiesel Production from Algae", Briggs, Michael, University of New Hampshire Biodiesel Group, UNH (revised August 2004) page 8.

Technical Note

"Liquid biofuels have been used since the early days of the car industry. Nikolaus August Otto, the German inventor of the combustion engine, conceived his invention to run on ethanol. Rudolf Diesel, the German inventor of the Diesel engine, designed it to run on peanut oil. Henry Ford originally designed the Ford Model T, a car produced from 1903 to 1926, to run completely on ethanol." (source: <http://en.wikipedia.org/wiki/Biofuel> Retrieved 8/31/2007).



TPH & Fuel & Hydrocarbons

Petroleum is a broadly defined class of liquid hydrocarbon mixtures that are used in a large variety of products for many different uses. In general, they are oil-based products that can be obtained by distillation and are normally used outside the refining industry. Petroleum products include aviation gasoline, motor gasoline, jet fuels, kerosene, gas/diesel oil, heavy fuel oil, naphtha, and lubricants among others.

Most analytical methods for petroleum products focus on the level of benzene, toluene, ethyl benzene and xylene (BTEX), the total petroleum hydrocarbon number (TPH) and the finger print of the petroleum product.

Individual Fuel and Hydrocarbons

Compound	Conc.	Matrix	Cat. No.	Price / 1 mL	Compound	Conc.	Matrix	Cat. No.	Price / 1 mL				
5-alpha Androstane	1 mg/mL	CH ₂ Cl ₂	GRH-IS	\$ 15	#6 Fuel Oil 68553-00-4	0.5 mg/mL	Hexane	FU-008	\$ 10				
438-22-2	10 mg/mL	CH ₂ Cl ₂	GRH-IS-10X	30		20 mg/mL	Hexane	FU-008-40X	20				
Arctic Diesel	0.5 mg/mL	MeOH	FU-023	10		20 mg/mL	CH ₂ Cl ₂	FU-008-D-40X	20				
	20 mg/mL	MeOH	FU-023-40X	20	Gasoline Regular, unleaded	0.5 mg/mL	MeOH	GA-001	10				
Aviation (gas) (grade 100-LL)	20 mg/mL	CH ₂ Cl ₂	FU-023-D-40X	20		5 mg/mL	MeOH	GA-001-10X	20				
	0.5 mg/mL	MeOH	GA-004	10		20 mg/mL	MeOH	GA-001-40X	22				
	20 mg/mL	MeOH	GA-004-40X	20		20 mg/mL	CH ₂ Cl ₂	GA-001-D-40X	20				
Biodiesel 20	20 mg/mL	CH ₂ Cl ₂	GA-004-D-40X	20	Gasoline Premium	0.5 mg/mL	MeOH	GA-003	10				
	0.5 mg/mL	CH ₂ Cl ₂	FU-030-D	10		20 mg/mL	MeOH	GA-003-40X	20				
Biodiesel 100	20 mg/mL	CH ₂ Cl ₂	FU-030-D-40X	25	20 mg/mL	CH ₂ Cl ₂	GA-003-D-40X	20					
	0.5 mg/mL	CH ₂ Cl ₂	FU-029-D	20	Hydraulic Fluid 64742-54-7	0.5 mg/mL	Hexane	FU-020-H	10				
Biodiesel 100 (refinery grade)	20 mg/mL	CH ₂ Cl ₂	FU-029-D-40X	45		20 mg/mL	Hexane	FU-020-H-40X	20				
	0.5 mg/mL	CH ₂ Cl ₂	FU-032-D	20		20 mg/mL	CH ₂ Cl ₂	FU-020-D-40X	20				
p-Bromofluorobenzene 460-00-4	20 mg/mL	CH ₂ Cl ₂	FU-032-D-40X	45	Jet Reference Fuel Type I	0.5 mg/mL	MeOH	FU-011	10				
	2.5 mg/mL	Acetone	GARH-SS	20		20 mg/mL	MeOH	FU-011-40X	20				
1-Chloro-4-fluorobenzene 352-33-0	20 mg/mL	CH ₂ Cl ₂	FU-011-D-40X	20		JP-4 Jet Fuel (weathered)	0.5 mg/mL	MeOH	FU-010	10			
	1 mg/mL	MeOH	AK-101.0-IS-10X	20	20 mg/mL		MeOH	FU-010-40X	20				
1-Chlorooctadecane 3386-33-2	20 mg/mL	CH ₂ Cl ₂	FU-010-D-40X	20	JP-5 Fuel		0.5 mg/mL	MeOH	FU-012	10			
	1 mg/mL	Hexane	DRH-007-SS	15		20 mg/mL	MeOH	FU-012-40X	20				
1-Chloro-4-fluorobenzene 352-33-0	20 mg/mL	CH ₂ Cl ₂	GARH-IS	15		20 mg/mL	CH ₂ Cl ₂	FU-012-D-40X	20				
	2,5-Dibromotoluene 615-59-8	50 µg/mL	MeOH	GRH-004-SS	10	JP-7 Fuel	0.5 mg/mL	MeOH	FU-014	10			
		500 µg/mL	MeOH	GRH-004-SS-10X	20		20 mg/mL	MeOH	FU-014-40X	20			
5 mg/mL		MeOH	GRH-004-SS-100X	20	20 mg/mL		CH ₂ Cl ₂	FU-014-D-40X	20				
Diesel	0.5 mg/mL	MeOH	FU-009	10	JP-8 Fuel	0.5 mg/mL	MeOH	FU-015	10				
	5 mg/mL	CH ₂ Cl ₂	FU-009-D-10X	20		20 mg/mL	MeOH	FU-015-40X	20				
	20 mg/mL	MeOH	FU-009-40X	20		20 mg/mL	CH ₂ Cl ₂	FU-015-D-40X	20				
	20 mg/mL	CH ₂ Cl ₂	FU-009-D-40X	20	JP-TS Aviation Fuel 64742-47-8	0.5 mg/mL	MeOH	FU-016	10				
#1 Diesel - Low Sulfur	0.5 mg/mL	MeOH	FU-013	10		20 mg/mL	MeOH	FU-016-40X	20				
	20 mg/mL	MeOH	FU-013-40X	20		20 mg/mL	CH ₂ Cl ₂	FU-016-D-40X	20				
	20 mg/mL	CH ₂ Cl ₂	FU-013-D-40X	20	JP-10 Aviation Fuel 2825-82-3	0.5 mg/mL	MeOH	FU-022	10				
#2 Diesel 68334-30-5	50 mg/mL	Acetone	AK-102-LCS-R1-10X	20		20 mg/mL	MeOH	FU-022-40X	20				
	0.5 mg/mL	MeOH	FU-017	10		20 mg/mL	CH ₂ Cl ₂	FU-022-D-40X	20				
#2 Diesel (Extra Low Sulfur) 68476-43-6	5 mg/mL	CH ₂ Cl ₂	FU-017-D-10X	20	5 mg/mL	CH ₂ Cl ₂	FK-W25-10X	25					
	5 mg/mL	Acetone	AK-102.0-LCS	10	Kerosene 25% Weathered	5 mg/mL	CH ₂ Cl ₂	FK-W50-10X	25				
	50 mg/mL	Acetone	AK-102.0-LCS-10X	20									
	20 mg/mL	MeOH	FU-017-40X	20									
#2 Diesel (Low Sulfur) 25% Weathered	20 mg/mL	CH ₂ Cl ₂	FU-017-D-40X	20	Kerosene 50% Weathered	5 mg/mL	CH ₂ Cl ₂	FK-W75-10X	25				
	20 mg/mL	CH ₂ Cl ₂	FU-017-D-40X	20									
	5 mg/mL	CH ₂ Cl ₂	FD2-W25-10X	25									
#2 Diesel (Low Sulfur) 50% Weathered	5 mg/mL	CH ₂ Cl ₂	FD2-W50-10X	25	Kerosene 75% Weathered	0.5 mg/mL	MeOH	FU-005	10				
	#2 Diesel (Low Sulfur) 75% Weathered	5 mg/mL	CH ₂ Cl ₂	FD2-W75-10X						25	20 mg/mL	MeOH	FU-005-40X
#2 Diesel 25% Weathered		5 mg/mL	CH ₂ Cl ₂	FD2-W25-R1-10X						25	5 mg/mL	CH ₂ Cl ₂	FU-005-D-10X
	#2 Diesel 50% Weathered	5 mg/mL	CH ₂ Cl ₂	FD2-W50-R1-10X	25	20 mg/mL	CH ₂ Cl ₂	FU-005-D-40X	20				
#2 Diesel 75% Weathered		5 mg/mL	CH ₂ Cl ₂	FD2-W75-R1-10X	25	Lacquer Thinner	1 gram	Neat	HS-001N	20			
	Docosane 629-97-0	50 % w/w	Toluene	D-5186-91-PM	20		0.5 mg/mL	MeOH	HS-001S	10			
n-Dodecane 112-40-3		5 mg/mL	MeOH	AS-E0238	32		20 mg/mL	MeOH	HS-001S-40X	20			
	1.5 % w/w	Isooctane	M-GRA-SCS-AS	10	20 mg/mL	CH ₂ Cl ₂	HS-001S-D-40X	20					
#1 Fuel oil 70892-10-3	0.5 mg/mL	MeOH	FU-001	10	Mineral Spirits 8030-30-6	1 gram	Neat	HS-002N	20				
	20 mg/mL	MeOH	FU-001-40X	20		0.5 mg/mL	MeOH	HS-002S	10				
	20 mg/mL	CH ₂ Cl ₂	FU-001-D-40X	20		20 mg/mL	MeOH	HS-002S-40X	20				
#2 Fuel oil 68476-30-2	20 mg/mL	CH ₂ Cl ₂	FU-001-D-40X	20	20 mg/mL	CH ₂ Cl ₂	HS-002S-D-40X	20					
	0.5 mg/mL	MeOH	FU-002	10	Naphtha 64742-89-8	1 gram	Neat	HS-003N	20				
	20 mg/mL	MeOH	FU-002-40X	20		0.5 mg/mL	MeOH	HS-003S	10				
20 mg/mL	CH ₂ Cl ₂	FU-002-D-40X	20	20 mg/mL		MeOH	HS-003S-40X	20					
#3 Fuel oil	20 mg/mL	CH ₂ Cl ₂	FU-002-D-40X	20	20 mg/mL	CH ₂ Cl ₂	HS-003S-D-40X	20					
	0.5 mg/mL	Hexane	FU-003	10	Nonatriacontane 7194-86-7	750 µg/mL	Chloroform	DRH-FL-SS-R1	60				
	20 mg/mL	Hexane	FU-003-40X	20		1 mg/mL	CS ₂	DRH-FL-SS	20				
20 mg/mL	CH ₂ Cl ₂	FU-003-D-40X	20	3 mg/mL		CS ₂	DRH-FL-SS-3X	27					
#4 Fuel oil 68476-31-3	0.5 mg/mL	Hexane	FU-004	10	n-Pentadecane 629-62-9	5 mg/mL	MeOH	AS-E0241	32				
	20 mg/mL	Hexane	FU-004-40X	20		RFA Gasoline (oxygenate-free)	0.5 mg/mL	MeOH	GA-005	10			
	20 mg/mL	CH ₂ Cl ₂	FU-004-D-40X	20	20 mg/mL		MeOH	GA-005-40X	20				
Regular Leaded Gasoline	0.5 mg/mL	MeOH	GA-002	10	20 mg/mL		CH ₂ Cl ₂	GA-005-D-40X	20				
	20 mg/mL	MeOH	GA-002-40X	20	0.5 mg/mL	MeOH	GA-002	10					
	20 mg/mL	CH ₂ Cl ₂	GA-002-D-40X	20	20 mg/mL	MeOH	GA-002-40X	20					

TPH & Fuel & Hydrocarbons



Individual Fuel and Hydrocarbons

Compound	Conc.	Matrix	Cat. No.	Price / 1 mL	Compound	Conc.	Matrix	Cat. No.	Price / 1 mL	
SAE 5W30 Motor oil	0.5 mg/mL	Hexane	FU-025-H	\$ 10	o-Terphenyl 84-15-1	200 µg/mL	Acetone	AK-102.0-SS	\$ 10	
	20 mg/mL	Hexane	FU-025-H-40X	20		1 mg/mL	CH ₂ Cl ₂	DRH-006-SS	15	
	20 mg/mL	CH ₂ Cl ₂	FU-025-D-40X	20		2 mg/mL	Acetone	AK-102.0-SS-10X	15	
20 mg/mL	Hexane	FU-026-H	10	2 mg/mL		Acetone	GRH-SS	17		
SAE 10W30 Motor oil	0.5 mg/mL	Hexane	FU-026-H	10	n-Tetradecane 629-59-4	5 mg/mL	MeOH	AS-E0240	32	
	20 mg/mL	Hexane	FU-026-H-40X	20		Tetracosane (5 mL) 646-31-1	500 µg/mL	CS ₂	D-5480-C40-5ML	15
	20 mg/mL	CH ₂ Cl ₂	FU-026-D-40X	20			500 µg/mL	Chloroform	D-5480-C40-R1-5ML	20
SAE 10W40 Motor oil	0.5 mg/mL	Hexane	FU-027-H	10	n-Tridecane 629-50-5	5 mg/mL	MeOH	AS-E0239	32	
	20 mg/mL	Hexane	FU-027-H-40X	20		1,2,3-Trimethylbenzene 526-73-8	1 mg/mL	CH ₂ Cl ₂	V-028S-D-10X	20
	20 mg/mL	CH ₂ Cl ₂	FU-027-D-40X	20	n-Triacontane-d ₆₂ 93952-07-9		500 µg/mL	Acetone	AK-103.0-SS	20
SAE 20W50 Motor oil	0.5 mg/mL	Hexane	FU-028-H	10		5 mg/mL	Acetone:THF	AK-103.0-SS-10X	30	
	20 mg/mL	Hexane	FU-028-H-40X	20		5 mg/mL	THF	DRH-SS	30	
	20 mg/mL	CH ₂ Cl ₂	FU-028-D-40X	20	Turbine (Jet) fuel	0.5 mg/mL	MeOH	FU-006	10	
SAE 30W Motor oil	0.5 mg/mL	Hexane	FU-018-H	10		20 mg/mL	MeOH	FU-006-40X	20	
	20 mg/mL	Hexane	FU-018-H-40X	20		20 mg/mL	CH ₂ Cl ₂	FU-006-D-40X	20	
	20 mg/mL	CH ₂ Cl ₂	FU-018-D-40X	20		Turpentine 8006-64-2	1 gram	Neat	HS-004N	20
SAE 40W Motor oil	0.5 mg/mL	Hexane	FU-019-H	10			0.5 mg/mL	MeOH	HS-004S	10
	5 mg/mL	Acetone	AK-103.0-LCS	10	20 mg/mL		MeOH	HS-004S-40X	20	
	20 mg/mL	Hexane	FU-019-H-40X	20	20 mg/mL		CH ₂ Cl ₂	HS-004S-D-40X	20	
SAE 50W Motor oil	20 mg/mL	Acetone:CH ₂ Cl ₂	AK-103.0-LCS-5X	20	Unleaded Gasoline 25% Weathered		5 mg/mL	MeOH	GA-W25-10X	25
	20 mg/mL	CH ₂ Cl ₂	FU-021-D-40X	20		Unleaded Gasoline 50% Weathered	5 mg/mL	MeOH	GA-W50-10X	25
	Stoddard solvent 8052-41-3	1 gram	Neat	HS-005N	20		Unleaded Gasoline 75% Weathered	5 mg/mL	MeOH	GA-W75-10X
0.5 mg/mL		MeOH	HS-005S	10						
5 mg/mL		MeOH	HS-005S-10X	20						
20 mg/mL		MeOH	HS-005S-40X	20						
20 mg/mL		CH ₂ Cl ₂	HS-005S-D-40X	20						

Complete Set of Total Petroleum Hydrocarbon (TPH) Pattern Recognition Standards

AccuStandard has assembled the following sets to identify specific petroleum product types found during LUFT/LUST investigations. The sets can be purchased using one convenient Cat. No. or as individuals. **Other concentrations are listed on the next page.**

TPH-R2-SET

\$ 585 / 34 x 1 mL (includes TPH-001-R1-SET, TPH-002-R1-SET, TPH-003-SET, TPH-004-SET)

Motor Fuels & Lubricating Oils Set

TPH-001-R1-SET

\$ 235 / 13 x 1 mL

	mg/mL	Solv.	Cat. No.	Price
Gasoline, regular unleaded	20	MeOH	GA-001-40X	\$ 20
Gasoline, regular leaded	20	MeOH	GA-002-40X	20
Gasoline, premium	20	MeOH	GA-003-40X	20
RFA Gasoline (oxygenate free)	20	MeOH	GA-005-40X	20
#2 Diesel (conventional)	20	CH ₂ Cl ₂	FU-009-D-40X	20
#1 Diesel (low sulfur)	20	CH ₂ Cl ₂	FU-013-D-40X	20
#2 Diesel (extra low sulfur)	20	CH ₂ Cl ₂	FU-017-D-40X	20
Arctic Diesel	20	CH ₂ Cl ₂	FU-023-D-40X	20
SAE 30W Motor oil	20	CH ₂ Cl ₂	FU-018-D-40X	20
SAE 40W Motor oil	20	CH ₂ Cl ₂	FU-019-D-40X	20
SAE 50W Motor oil	20	CH ₂ Cl ₂	FU-021-D-40X	20
Biodiesel 20	20	CH ₂ Cl ₂	FU-030-D-40X	20
Biodiesel 100 (consumer grade)	20	CH ₂ Cl ₂	FU-029-D-40X	45

Heating Fuel Oils Set

TPH-002-R1-SET

\$ 100 / 6 x 1 mL

	mg/mL	Solv.	Cat. No.	Price
#1 Fuel oil	20	CH ₂ Cl ₂	FU-001-D-40X	\$ 20
#2 Fuel oil	20	CH ₂ Cl ₂	FU-002-D-40X	20
#3 Fuel oil	20	CH ₂ Cl ₂	FU-003-D-40X	20
#4 Fuel oil	20	CH ₂ Cl ₂	FU-004-D-40X	20
#6 Fuel oil	20	CH ₂ Cl ₂	FU-008-D-40X	20
Kerosene	20	CH ₂ Cl ₂	FU-005-D-40X	20

Aviation Fuels & Oils Set

TPH-003-SET

\$ 160 / 10 x 1 mL

	mg/mL	Solv.	Cat. No.	Price
Aviation gasoline Grade 100 LL	20	CH ₂ Cl ₂	GA-004-D-40X	\$ 20
JP-4 Fuel (weathered)	20	CH ₂ Cl ₂	FU-010-D-40X	20
JP-5 Fuel	20	CH ₂ Cl ₂	FU-012-D-40X	20
JP-7 Fuel	20	CH ₂ Cl ₂	FU-014-D-40X	20
JP-8 Fuel	20	CH ₂ Cl ₂	FU-015-D-40X	20
JP-10 Fuel (Cruise Missile)	20	CH ₂ Cl ₂	FU-022-D-40X	20
JP-TS	20	CH ₂ Cl ₂	FU-016-D-40X	20
Jet Fuel (type 1)	20	CH ₂ Cl ₂	FU-011-D-40X	20
Turbine (Jet A) Fuel	20	CH ₂ Cl ₂	FU-006-D-40X	20
Hydraulic oil	20	CH ₂ Cl ₂	FU-020-D-40X	20

Household & Industrial Solvent Set

TPH-004-SET

\$ 80 / 5 x 1 mL

	mg/mL	Solv.	Cat. No.	Price
Lacquer thinner	20	CH ₂ Cl ₂	HS-001S-D-40X	\$ 20
Mineral spirits	20	CH ₂ Cl ₂	HS-002S-D-40X	20
Naphtha	20	CH ₂ Cl ₂	HS-003S-D-40X	20
Turpentine	20	CH ₂ Cl ₂	HS-004S-D-40X	20
Stoddard solvent	20	CH ₂ Cl ₂	HS-005S-D-40X	20

Motor Oil Standards

	mg/mL	Solv.	Cat. No.	Price		mg/mL	Solv.	Cat. No.	Price
SAE 5W30 Motor oil	0.5	Hexane	FU-025-H	\$ 10	SAE 20W50 Motor oil	0.5	Hexane	FU-028-H	\$ 10
	20.0	Hexane	FU-025-H-40X	20		20.0	Hexane	FU-028-H-40X	20
	20.0	CH ₂ Cl ₂	FU-025-D-40X	20		20.0	CH ₂ Cl ₂	FU-028-D-40X	20
SAE 10W30 Motor oil	0.5	Hexane	FU-026-H	10	Composite Standard	20.0	CH ₂ Cl ₂	MO-COMP-D-40X	30
	20.0	Hexane	FU-026-H-40X	20					
	20.0	CH ₂ Cl ₂	FU-026-D-40X	20					
SAE 10W40 Motor oil	0.5	Hexane	FU-027-H	10					
	20.0	Hexane	FU-027-H-40X	20					
	20.0	CH ₂ Cl ₂	FU-027-D-40X	20					

Individual Fuels and Hydrocarbons continued on next page



TPH & Fuel & Hydrocarbons

AccuStandard designed the weathered fuel line to mimic the weathering, evaporation, and migration process. Use of these standards can help in the identification of the fuel type if it has been present in the ground for some time, in a sandy type soil with possible evaporation loss, or has migrated from the plume point of origin.

Weathered LUFT/LUST Fuel Sets

Weathered Gasoline Set

WGA-SET	Each in 5.0 mg/mL in MeOH	Cat. No.	\$ 85 / 4 x 1 mL
Gasoline, regular unleaded		GA-001-10X	20 / 1 mL
Gasoline, regular unleaded (25% Weathered)		GA-W25-10X	25 / 1 mL
Gasoline, regular unleaded (50% Weathered)		GA-W5-10X	25 / 1 mL
Gasoline, regular unleaded (75% Weathered)		GA-W75-10X	25 / 1 mL

Weathered Kerosene Set

WFK-SET	Each in 5.0 mg/mL in CH ₂ Cl ₂		\$ 85 / 4 x 1 mL
Kerosene		FU-005-D-10X	20 / 1 mL
Kerosene (25% Weathered)		FK-W25-10X	25 / 1 mL
Kerosene (50% Weathered)		FK-W50-10X	25 / 1 mL
Kerosene (75% Weathered)		FK-W75-10X	25 / 1 mL

Weathered #2 Diesel (extra Low Sulfur Content) Set

WFD2-SET	Each in 5.0 mg/mL in CH ₂ Cl ₂		\$ 85 / 4 x 1 mL
#2 Diesel (extra Low Sulfur)		FU-017-D-10X	20 / 1 mL
#2 Diesel (extra Low Sulfur) (25% Weathered)		FD2-W25-10X	25 / 1 mL
#2 Diesel (extra Low Sulfur) (50% Weathered)		FD2-W50-10X	25 / 1 mL
#2 Diesel (extra Low Sulfur) (75% Weathered)		FD2-W75-10X	25 / 1 mL

Weathered #2 Diesel (Conventional) Set

WFD2-R1-SET	Each in 5.0 mg/mL in CH ₂ Cl ₂		\$ 85 / 4 x 1 mL
#2 Diesel (Conventional)		FU-009-D-10X	20 / 1 mL
#2 Diesel (Conventional) (25% Weathered)		FD2-W25-R1-10X	25 / 1 mL
#2 Diesel (Conventional) (50% Weathered)		FD2-W50-R1-10X	25 / 1 mL
#2 Diesel (Conventional) (75% Weathered)		FD2-W75-R1-10X	25 / 1 mL

Technical Note

Petroleum Products contain many different chemicals, plus synthetic product additives. Typically, these petroleum products are subdivided into two groups based on their volatility: [a] gasoline related products (more volatile) and [b] fuel related products (less volatile such as kerosene, aviation fuels, diesel fuels and heating oils).

Most analytical methods for petroleum products focus on several items: the level of BTEX, the total petroleum hydrocarbon number (TPH), and the fingerprint of the petroleum product. Depending on the volatility of the petroleum product spilled, the nature of the contaminated soil, and the age of the spill, analysis becomes even more difficult. Weathering, evaporation, and the migration of the lighter volatiles at the contamination site can affect the fingerprint identification portion of the fuel products analysis.

TPH & Fuel & Hydrocarbons

TOTAL PETROLEUM HYDROCARBON



PATTERN RECOGNITION STANDARDS

AccuStandard, Inc.

Total Petroleum Hydrocarbon Pattern Recognition Standards

This book contains chromatography for the various petroleum products typically found during LUFT/LUST site investigations. The chromatography shows each fuel pattern in a 25 minute analytical run for early eluting petroleum products like gasoline to late eluting products like motor oil. In addition, an n-alkane standard (DRH-008S) analyzed under identical conditions has been overlaid on each petroleum product chromatogram. Use of the book will assist the chemist's identification of the fuel for pattern recognition.

The n-alkane standard (DRH-008S) overlay provides n-alkane reference points between the standard and the unknown sample. These beginning and ending n-alkane reference points can be used to establish gross hydrocarbon concentrations. By comparing the specific n-alkane range of the closest identified petroleum standard to that of the unknown sample, a reproducible gross hydrocarbon number can be achieved.

To Order,

BOOK-TPH-001 \$ 35



TPH & Fuel & Hydrocarbons

Brownfield Regulation & ISO/DIS 9337



Petroleum Brownfield Regulation

Brownfield Regulation that has been approved by the Canadian Ministry of the Environment as of October 1, 2004.

Light Petroleum Fraction

CCME-LPF-SET

At stated conc. ($\mu\text{g/mL}$) in MeOH

	CCME-LPF-0.05X	CCME-LPF-0.1X	CCME-LPF-0.2X	CCME-LPF-0.5X	CCME-LPF
n-Decane	12.5	25	50	125	250
n-Hexane	12.5	25	50	125	250
Toluene	12.5	25	50	125	250
Benzene	12.5	25	50	125	250
o-Xylene	12.5	25	50	125	250
m-Xylene	6.25	12.5	25	62.5	125
p-Xylene	6.25	12.5	25	62.5	125
Ethylbenzene	12.5	25	50	125	250

\$ 95 / 5 x 1 mL
8 comps.

Medium & Heavy Petroleum Fraction

CCME-MHPF-SET

At stated conc. ($\mu\text{g/mL}$) in n-Hexane

	CCME-MHPF-0.1X	CCME-MHPF-0.5X	CCME-MHPF
n-Decane	40	200	400
n-Hexadecane	40	200	400
n-Tetracontane	40	200	400

\$ 75 / 3 x 1 mL
3 comps.

Performance Check Standard

CCME-QC

\$ 45 / 1 x 1 mL

CCME-QC-PAK

SAVE 20% \$ 180 / 5 x 1 mL

At 40 $\mu\text{g/mL}$ each in n-Hexane:Cyclohexane

2 comps.

n-Pentacontane
n-Tetracontane

Hydrocarbon Standard

D-5442-R1

\$ 60 / 1 x 1 mL

100 $\mu\text{g/mL}$ each in Cyclohexane

18 comps.

n-Decane
n-Dodecane
n-Tetradecane
n-Hexadecane
n-Octadecane
n-Eicosane
n-Docosane
n-Tetracosane
n-Hexacosane
n-Octacosane
n-Triacontane
n-Dotriacontane
n-Tetracontane
n-Hexatriacontane
n-Octatriacontane
n-Tetracontane
n-Tetracontane
n-Pentacontane

Canadian Atlantic RBCA EPH Mix

CCME-EPH

\$ 35 / 1 x 1 mL

1000 $\mu\text{g/mL}$ each in Hexane:CH₂Cl₂ 85:15

11 comps.

Acenaphthene
Anthracene
Benzo[a]pyrene
Chrysene
n-Decane
n-Dodecane
n-Dotriacontane
n-Heneicosane
n-Hexadecane
n-Octacosane
Naphthalene

Surrogate Standard

CCME-EPH/SS

\$ 20 / 1 x 1 mL

1000 $\mu\text{g/mL}$ each in CH₂Cl₂

2 comps.

n-Dotriacontane
Isobutylbenzene

Canadian Atlantic RBCA VPH Mix

CCME-VPH

\$ 30 / 1 x 1 mL

1000 $\mu\text{g/mL}$ each in MeOH

12 comps.

Benzene
n-Decane
Ethylbenzene
n-Heptane
n-Hexane
1-Methyl-3-ethylbenzene
n-Octane
Toluene
1,2,4-Trimethylbenzene
1,3,5-Trimethylbenzene
o-Xylene
p-Xylene

Surrogate Standard

CCME-VPH/SS

\$ 15 / 1 x 1 mL

1000 $\mu\text{g/mL}$ in MeOH

Isobutylbenzene

Spike Standard

CCME-SPIKE

\$ 30 / 1 x 1 mL

At 2500 $\mu\text{g/mL}$ each in n-Hexane

2 comps.

SAE 30W Motor Oil - Non-Detergent Formula
#2 Diesel - 50% Weathered

ISO/DIS 9377 Hydrocarbon Oil Index

Diesel #2/Mineral Oil Standard

ENISO9377-2-1

\$ 25 / 1 x 1 mL

10000 $\mu\text{g/mL}$ total hydrocarbons in Hexane

2 comps.

#2 Diesel (5000 $\mu\text{g/mL}$)
Mineral Oil (5000 $\mu\text{g/mL}$)

Extraction Solvent Stock Soln.

ENISO9377-2-3

\$ 25 / 1 x 5 mL

At stated conc. in Hexane

2 comps.

n-Decane (20 μL)
n-Tetracontane (20 mg/L)

Quality Control Standard Mix

ISO/DIS9377-4-1

\$ 25 / 1 x 1 mL

1000 $\mu\text{g/mL}$ total hydrocarbons in Acetone

2 comps.

#2 Diesel (500 $\mu\text{g/mL}$)
Mineral Oil (500 $\mu\text{g/mL}$)

Stearyl Stearate Test Solution

ISO/DIS9377-4-2

\$ 45 / 1 x 10 mL

2000 $\mu\text{g/mL}$ in Cyclohexane

Stearyl stearate

Florisil Cartridge QC Std. Mix

ENISO9377-2-4

\$ 40 / 1 x 10 mL

2000 $\mu\text{g/mL}$ total hydrocarbons in Hexane

2 comps.

#2 Diesel (1000 $\mu\text{g/mL}$)
Mineral Oil (1000 $\mu\text{g/mL}$)

System Performance Standard of n-alkanes

ENISO9377-2-2

\$ 45 / 1 x 1 mL

50 $\mu\text{g/mL}$ each in Hexane

16 comps.

n-Decane
n-Dodecane
n-Tetradecane
n-Hexadecane
n-Octadecane
n-Eicosane
n-Docosane
n-Tetracosane
n-Hexacosane
n-Octacosane
n-Triacontane
n-Dotriacontane
n-Tetracontane
n-Hexatriacontane
n-Octatriacontane
n-Tetracontane

ISO/DIS 9377-4 Standard Mixture Stock Solution

TPH-006-10X

\$ 35 / 1 x 1 mL

TPH-006-10X-PAK

SAVE 20% \$ 140 / 5 x 1 mL

5000 $\mu\text{g/mL}$ each in Cyclohexane

2 comps.

#2 Diesel
Mineral oil



LUFT/LUST Standards

Multi-State

There are approximately 625,000 underground storage tanks nationwide that store petroleum or hazardous substances that can harm the environment and human health if their contents are released. Until the mid-1980s, most tanks were made of bare steel. Over time, these tanks would corrode and their contents would leak into the environment. Leaking could also occur due to faulty installation or inadequate maintenance procedures. The greatest potential hazard from a leaking underground storage tank is contaminated groundwater, the source of drinking water for nearly half of all Americans. Other health and environmental risks, including the potential for fire and explosion also exist.

From 1988 through March of 2008 there have been 478,457 confirmed releases reported, 453,065 cleanups have been initiated, and 371,880 cleanups have been completed.

The standards listed in this section are designed to meet federal and state monitoring and testing regulations for underground storage tanks.


Multi-State Hydrocarbon Window Defining	326
Alaska GRO, DRO Hydrocarbons, RRO, DRO Hydrocarbons (Fuel) DRO Hydrocarbons (Standards)	327-329
Arizona Diesel Range	330
California Gasoline	330
Connecticut Extractable TPH	331
Florida FTRPH	331
Massachusetts EPH, VPH	332-333
Mississippi DRO	334
Pennsylvania Storage Tank Monitoring Standards	334
Tennessee DRO	334
Texas Method 1005 (PST)	335
Washington VPH, EPH	336-337
Wisconsin Gasoline Range Hydrocarbons	337

LUFT/LUST (UST) Standards



**Leaking
Underground
Fuel
Tank**

**Leaking
Underground
Storage
Tank**

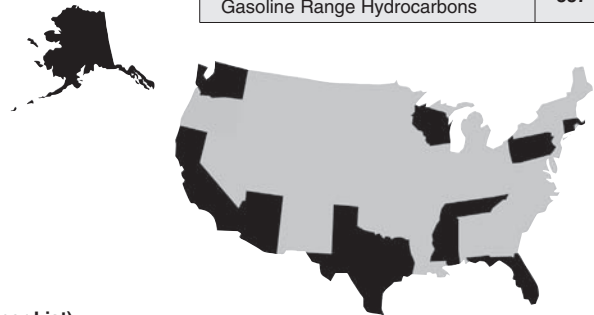

Additional LUFT/LUST

GRH
DRH, Oil, Grease & TPH (Method 1664, 413.2/418.1 & 8440)
Automotive Engine Exhaust, Refinery Waste (Method 1004, ASTM E1387, E1618, Skinner List)

Multi-State Method Hydrocarbon Window Defining

DRH-008S-R2
DRH-008S-R2-PAK
500 µg/mL each in Chloroform

\$ 65 / 1 x 1 mL
SAVE 20% \$ 260 / 5 x 1 mL
35 comps.

Octane	Heptadecane	Tetracosane	Tritriacontane
Nonane	Pristane	Pentacosane	Tetatriacontane
Decane	Octadecane	Hexacosane	Pentatriacontane
Undecane	Phytane	Heptacosane	Hexatriacontane
Dodecane	Nonadecane	Octacosane	Heptatriacontane
Tridecane	Eicosane	Nonacosane	Octatriacontane
Tetradecane	Heneicosane	Triacosane	Nonatriacontane
Pentadecane	Docosane	<i>n</i> -Hentriacontane	Tetracontane
Hexadecane	Tricosane	Dotriacontane	

Technical Note

We offer a hydrocarbon window defining standard with the C₉ to C₄₀ odd and even alkanes. Use of this one standard should meet the numerous state-to-state variations for hydrocarbon validation and reporting. As an added benefit, AccuStandard has included Pristane and Phytane in the formulation. Again, use of this one standard can meet numerous LUFT/LUST programs requiring that the C₁₇ (Pristane) and C₁₈ (Phytane) ratio be used to estimate subsurface degradation of fuel oil spills.

LUFT/LUST Standards

Alaska GRO Methods



Alaska Method 101 Determination of Gasoline Range Organic (GRO) Hydrocarbons

Normal Alkane Standard - GRO Defining Mix

GRO-AK-101-NAS-10X \$ 20 / 1 x 1 mL
 GRO-AK-101-NAS-10X-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 2.0 mg/mL each in MeOH 5 comps.

n-Hexane
n-Heptane
n-Octane

n-Nonane
n-Decane

Laboratory Control Standard

GRO-AK-101-LCS \$ 20 / 1 x 1 mL
 GRO-AK-101-LCS-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 5.0 mg/mL in MeOH

Gasoline, regular unleaded

Internal Standard

GRO-AK-101-IS-10X \$ 20 / 1 x 1 mL
 GRO-AK-101-IS-10X-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 2.0 mg/mL in MeOH

1-Chloro-4-fluorobenzene

Surrogate Control Standard

GRO-AK-101-SS \$ 10 / 1 x 1 mL
 GRO-AK-101-SS-PAK **SAVE 20%** \$ 40 / 5 x 1 mL
 50 µg/mL each in MeOH

GRO-AK-101-SS-10X \$ 20 / 1 x 1 mL
 GRO-AK-101-SS-10X-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 500 µg/mL each in MeOH

GRO-AK-101-SS-100X \$ 20 / 1 x 1 mL
 GRO-AK-101-SS-100X-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 5,000 µg/mL each in MeOH 2 comps.

p-Bromofluorobenzene

a,a,a-Trifluorotoluene

Alaska Method Determination of Aromatic & Aliphatic Hydrocarbons in GRO

AK101AA Aromatics Mix

GRO-AK-101AA-ARO \$ 30 / 1 x 1 mL
 GRO-AK-101AA-ARO-PAK **SAVE 20%** \$ 120 / 5 x 1 mL
 2000 µg/mL each in MeOH 14 comps.

Benzene
 Toluene
 Ethylbenzene
m-Xylene
p-Xylene
o-Xylene
 1,2,3-Trimethylbenzene

1,2,4-Trimethylbenzene
 1,3,5-Trimethylbenzene
 Isopropylbenzene
m-Ethyltoluene
p-Ethyltoluene
o-Ethyltoluene
n-Propylbenzene

Certified BTEX in Gasoline (Single Source)

GA-001-20X-BTEX \$ 55 / 1 x 1 mL
 10.0 mg/mL in MeOH

Gasoline, regular unleaded

Technical Note

Laboratory Control Standard

The gasoline laboratory control standard was taken from an ASTM selected fuel set and a source independent of what is being used in the Gasoline Composite Mix.

Simultaneous BTEX / Gasoline QA/QC

Our QC Department has certified the benzene, toluene, ethyl benzene and xylene concentrations in the unleaded gasoline standard (GA-001-20X-BTEX and GRO-AK-101-GCS-BTEX). This allows the use of a single injection to verify that the QA/QC requirements are being met for the BTEX analytes as well as for the gasoline.

We have added a multi source certified BTEX in gasoline composite mix (GRO-AK-101-GCS-BTEX). The BTEX values for this multi-source calibration standard have been determined through in-house analysis against a BTEX multi-level calibration curve listed on the certificate.

Certified BTEX in Gasoline Composite (Multi Source)

GRO-AK-101-GCS-BTEX \$ 55 / 1 x 1 mL
 5 mg/mL total in MeOH 3 comps.

	Wt. Vol.
Gasoline, premium	1.66 mg/mL
Gasoline, regular leaded	1.67 mg/mL
Gasoline, regular unleaded	1.67 mg/mL

Gasoline Calibration Composite Mix

GRO-AK-101-GCS \$ 25 / 1 x 1 mL
 GRO-AK-101-GCS-PAK **SAVE 20%** \$ 100 / 5 x 1 mL
 Total 5.0 mg/mL in MeOH 3 comps.

	Wt. Vol.
Gasoline, premium	1.66 mg/mL
Gasoline, regular leaded	1.67 mg/mL
Gasoline, regular unleaded	1.67 mg/mL

Gasoline Calibration Mix Version

GRO-AK-101-GSC-R1 \$ 25 / 1 x 1 mL
 GRO-AK-101-GSC-R1-PAK **SAVE 20%** \$ 100 / 5 x 1 mL
 Equal parts by weight of each

Gasoline, regular unleaded
 Gasoline, plus unleaded
 Gasoline, premium unleaded



LUFT/LUST Standards

Alaska DRO Methods

Alaska Method 102 Determination of Diesel Range Organic (DRO) Hydrocarbons

Diesel Calibration Composite Mixture (low sulfur)

DRO-AK-102-DCS	\$ 25 / 1 x 1 mL
DRO-AK-102-DCS-PAK	SAVE 20% \$ 100 / 5 x 1 mL
<i>Total 5.0 mg/mL in CH₂Cl₂</i>	
DRO-AK-102-DCS-10X	\$ 40 / 1 x 1 mL
DRO-AK-102-DCS-10X-PAK	SAVE 20% \$ 160 / 5 x 1 mL
<i>Total 50.0 mg/mL in CH₂Cl₂</i>	
3 comps.	

	DRO-AK-102-DCS	DRO-AK-102-DCS-10X
Diesel Fuel (Arctic)	1.66 mg/mL	16.6 mg/mL
#1 Diesel (Low Sulfur)	1.67 mg/mL	16.6 mg/mL
#2 Diesel (extra Low Sulfur)	1.67 mg/mL	16.6 mg/mL

Stock Concentrate Diesel Calibration Composite Mix

DRO-AK-102-DCS-10X-R1	\$ 40 / 1 x 1 mL
DRO-AK-102-DCS-10X-R1-PAK	SAVE 20% \$ 160 / 5 x 1 mL
<i>Total 50.0 mg/mL in CH₂Cl₂</i>	
3 comps.	

	Wt. Vol.
Diesel Fuel (Arctic)	16.6 mg/mL
#1 Diesel (Low Sulfur)	16.7 mg/mL
#2 Diesel (Conventional)	16.7 mg/mL

Laboratory Control Standard (low sulfur)

DRO-AK-102-LCS	\$ 10 / 1 x 1 mL
DRO-AK-102-LCS-PAK	SAVE 20% \$ 40 / 5 x 1 mL
<i>5.0 mg/mL in Acetone</i>	
DRO-AK-102-LCS-10X	\$ 20 / 1 x 1 mL
DRO-AK-102-LCS-10X-PAK	SAVE 20% \$ 80 / 5 x 1 mL
<i>50.0 mg/mL in Acetone</i>	

#2 Diesel (extra Low Sulfur)

Laboratory Control Standard

DRO-AK-102-LCS-10X-R1	\$ 20 / 1 x 1 mL
DRO-AK-102-LCS-10X-R1-PAK	SAVE 20% \$ 80 / 5 x 1 mL
<i>50.0 mg/mL in Acetone</i>	

#2 Diesel (Conventional)

Technical Note

Laboratory Control Standards are prepared from an independent source.

Technical Note

AccuStandard formulated the Diesel Calibration Composite Mix and Laboratory Control Standard using two independent sources of #2 Diesel as required by the Alaskan method. Unfortunately, the chromatographic patterns for the #2 diesel sources (conventional & extra low sulfur) are different. We have obtained independent sources of each type of #2 diesel to insure similar chromatographic patterns and recommend that when a customer is analyzing the Diesel Calibration Composite and Laboratory Control standard that the client orders DRO-AK-102-DCS and DRO-AK-102-LCS products together to obtain similar chromatographic patterns for #2 diesel extra low sulfur patterns and DRO-AK-102-DCS-10X-R1 and DRO-AK-102-LCS-10X-R1 products to obtain similar chromatographic patterns for #2 Diesel conventional patterns. Laboratories performing the Alaskan DRO analysis will find the #2 Diesel conventional chromatographic pattern more closely resembles typical Diesel samples drawn from environmental sites.

Normal Alkane Standard - DRO Defining Mix

DRO-AK-102-NAS-10X	\$ 40 / 1 x 1 mL
DRO-AK-102-NAS-10X-PAK	SAVE 20% \$ 160 / 5 x 1 mL
<i>2.0 mg/mL each in CH₂Cl₂</i>	
16 comps.	

<i>n</i> -Decane	<i>n</i> -Hexadecane	<i>n</i> -Heneicosane
<i>n</i> -Undecane	<i>n</i> -Heptadecane	<i>n</i> -Docosane
<i>n</i> -Dodecane	<i>n</i> -Octadecane	<i>n</i> -Tricosane
<i>n</i> -Tridecane	<i>n</i> -Nonadecane	<i>n</i> -Tetracosane
<i>n</i> -Tetradecane	<i>n</i> -Eicosane	<i>n</i> -Pentacosane
<i>n</i> -Pentadecane		

Surrogate Standards

DRO-AK-102-SS	\$ 10 / 1 x 1 mL
DRO-AK-102-SS-PAK	SAVE 20% \$ 40 / 5 x 1 mL
<i>200 µg/mL in Acetone</i>	
DRO-AK-102-SS-10X	\$ 15 / 1 x 1 mL
DRO-AK-102-SS-10X-PAK	SAVE 20% \$ 60 / 5 x 1 mL
<i>2.0 mg/mL in Acetone</i>	
<i>o</i> -Terphenyl	

Internal Standard

DRO-AK-102-IS	\$ 15 / 1 x 1 mL
DRO-AK-102-IS-PAK	SAVE 20% \$ 60 / 5 x 1 mL
<i>1.0 mg/mL in CH₂Cl₂</i>	
5- α Androstane	

Alaska Method 102/103AA Determination of Aromatic & Aliphatic Hydrocarbons in Diesel Range Organic (DRO)

Diesel Range Standard

DRO-AK-102AA	\$ 40 / 1 x 1 mL
DRO-AK-102AA-PAK	SAVE 20% \$ 160 / 5 x 1 mL
<i>2000 µg/mL each in CH₂Cl₂</i>	
10 comps.	

<i>n</i> -Undecane	<i>n</i> -Tetracosane	Fluorene
<i>n</i> -Pentadecane	Naphthalene	Pyrene
<i>n</i> -Heptadecane	Acenaphthene	Anthracene
<i>n</i> -Octadecane		

Surrogate Standard

DRO-AK-102/103AA-SS	\$ 35 / 1 x 1 mL
DRO-AK-102/103AA-SS-PAK	SAVE 20% \$ 140 / 5 x 1 mL
<i>1000 µg/mL each in CH₂Cl₂</i>	
3 comps.	

Squalane
o-Terphenyl
5,6,7,8-Tetrahydro-1-naphthol

Retention Time Marker Standard

DRO-AK-102/103AA-RT	\$ 25 / 1 x 1 mL
DRO-AK-102/103AA-RT-PAK	SAVE 20% \$ 100 / 5 x 1 mL
<i>50 µg/mL each in CH₂Cl₂</i>	
3 comps.	

<i>n</i> -Decane	<i>n</i> -Hexatriacontane
<i>n</i> -Pentacosane	

LUFT/LUST Standards

Alaska Methods



Alaska Method 103 Determination of Residual Range Organic (RRO) Hydrocarbons

Residual Composite Mixtures

RRO-AK-103-RCS \$ 40 / 1 x 1 mL
 RRO-AK-103-RCS-PAK **SAVE 20%** \$ 160 / 5 x 1 mL
 Total 5.0 mg/mL in CH₂Cl₂ 3 comps.

SAE 30W Motor oil (1.66 mg) SAE 50W Motor Oil (1.67 mg)
 SAE 40W Motor oil (1.67 mg)

RRO-AK-103-RCS-10X \$ 40 / 1 x 1 mL
 RRO-AK-103-RCS-10X-PAK **SAVE 20%** \$ 160 / 5 x 1 mL
 Total 50.0 mg/mL in CH₂Cl₂ 3 comps.

SAE 30W Motor oil (16.6 mg) SAE 50W Motor Oil (16.7 mg)
 SAE 40W Motor oil (16.7 mg)

Laboratory Control Standard

RRO-AK-103-LCS \$ 10 / 1 x 1 mL
 RRO-AK-103-LCS-PAK **SAVE 20%** \$ 40 / 5 x 1 mL
 5.0 mg/mL in Acetone

RRO-AK-103-LCS-5X \$ 20 / 1 x 1 mL
 RRO-AK-103-LCS-5X-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 25.0 mg/mL in Acetone: CH₂Cl₂(1:1)

SAE 40W Motor oil

Surrogate Control Standard

RRO-AK-103-SS \$ 20 / 1 x 1 mL
 RRO-AK-103-SS-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 500 µg/mL in Acetone:THF (9:1)

RRO-AK-103-SS2 \$ 30 / 1 x 1 mL
 RRO-AK-103-SS2-PAK **SAVE 20%** \$ 120 / 5 x 1 mL
 5.0 mg/mL in THF:Acetone (3:1)

n-Triacotane-d₃₂

Alaska Method 103AA Determination of Aromatic & Aliphatic Hydrocarbons in Residual Range Organic

Residual Standard

RRO-AK-103AA \$ 35 / 1 x 1 mL
 RRO-AK-103AA-PAK **SAVE 20%** \$ 140 / 5 x 1 mL
 2000 µg/mL each in CH₂Cl₂ 9 comps.

n-Hexacosane
n-Octacosane
n-Triacotane
n-Dotriacotane
n-Tetraacotane

Benzo[b]fluoranthene
 Benzo[a]pyrene
 Benzo[g,h,i]perylene
 Dibenz[a,h]anthracene

Surrogate Standard

DRO-AK-102/103AA-SS \$ 35 / 1 x 1 mL
 DRO-AK-102/103AA-SS-PAK **SAVE 20%** \$ 140 / 5 x 1 mL
 1000 µg/mL each in CH₂Cl₂ 3 comps.

Squalane
o-Terphenyl

5,6,7,8-Tetrahydro-1-naphthol

Retention Time Marker Standard

DRO-AK-102/103AA-RT \$ 25 / 1 x 1 mL
 DRO-AK-102/103AA-RT-PAK **SAVE 20%** \$ 100 / 5 x 1 mL
 50 µg/mL each in CH₂Cl₂ 3 comps.

n-Decane
n-Pentacosane

n-Hexatriacontane

Alaska RRO LUFT/LUST



LUFT/LUST Standards

Arizona, California & Connecticut Methods

Arizona Method 8015 Determination of Diesel Range and Oil Range Organic (DRO & ORO) Hydrocarbons

Diesel & Oil Range Standard

DRO/ORO-AZ-8015 \$ 40 / 1 x 1 mL
 DRO/ORO-AZ-8015-PAK **SAVE 20%** \$ 160 / 5 x 1 mL
 2000 µg/mL each in CH₂Cl₂ 12 comps.

n-Decane	n-Hexadecane
n-Dodecane	n-Octacosane
n-Docosane	n-Octadecane
n-Dotriacontane	n-Tetracosane
n-Eicosane	n-Tetradecane
n-Hexacosane	n-Triacontane

Retention Time Verification Standard

DRO/ORO-AZ-8015-RTV \$ 25 / 1 x 1 mL
 DRO/ORO-AZ-8015-RTV-PAK **SAVE 20%** \$ 100 / 1 x 1 mL
 1000 µg/mL each in CH₂Cl₂ 3 comps.

n-Decane	n-Dotriacontane
n-Docosane	

Surrogate Standards

DRO-AK-102-SS-10X \$ 15 / 1 x 1 mL
 DRO-AK-102-SS-10X-PAK **SAVE 20%** \$ 60 / 5 x 1 mL
 2.0 mg/mL in Acetone

o-Terphenyl

Stock Calibration Standard

DRO/ORO-AZ-8015-SCS \$ 40 / 1 x 1 mL
 DRO/ORO-AZ-8015-SCS-PAK **SAVE 20%** \$ 160 / 1 x 1 mL
 10,000 µg/mL each in CH₂Cl₂ 2 comps.

#2 Diesel	10W 30 Motor Oil
-----------	------------------

California Method (including LA County)

California - Gasoline Range Hydrocarbons

S-603A-10X \$ 25 / 1 x 1 mL
 S-603A-10X-PAK **SAVE 20%** \$ 100 / 5 x 1 mL
 2.0 mg/mL each in MeOH 7 comps.

Benzene	o-Xylene
Ethylbenzene	m-Xylene
Methyl t-butyl ether	p-Xylene
Toluene	

Method 1004 Carbonyl Compounds as DNPH Derivatives by HPLC

M-1004 \$ 25 / 1 x 1 mL
 At stated conc. in AcCN 13 comps.
 M-1004-10X \$ 35 / 1 x 1 mL
 At 10 times the stated conc. in AcCN 13 comps.

Carbonyl Compound	DNPH Derivative
Acetaldehyde (3.0 µg/mL)	(15.3 µg/mL)
Acetone (3.0 µg/mL)	(12.3 µg/mL)
Acrolein (3.0 µg/mL)	(12.7 µg/mL)
Benzaldehyde (3.0 µg/mL)	(8.1 µg/mL)
2-Butanone (MEK) (3.0 µg/mL)	(10.5 µg/mL)
n-Butyraldehyde (3.0 µg/mL)	(10.5 µg/mL)
Crotonaldehyde (3.0 µg/mL)	(10.7 µg/mL)
Formaldehyde (3.0 µg/mL)	(21.0 µg/mL)
Hexanal (3.0 µg/mL)	(8.4 µg/mL)
Methacrolein (3.0 µg/mL)	(10.7 µg/mL)
Propionaldehyde (3.0 µg/mL)	(12.3 µg/mL)
m-Tolualdehyde (3.0 µg/mL)	(7.5 µg/mL)
Valeraldehyde (3.0 µg/mL)	(9.3 µg/mL)

LA County Well Investigation & Monitoring Program

Purgeable Aromatics - Gasoline ID

M-602-GAS-10X \$ 30 / 1 x 1 mL
 2.0 mg/mL each in MeOH 11 comps.

Benzene	Toluene
Chlorobenzene	o-Xylene
1,2-Dichlorobenzene	p-Xylene
1,3-Dichlorobenzene	m-Xylene
1,4-Dichlorobenzene	MtBE
Ethylbenzene	

CAR-DNPH \$ 20 / 1 x 1 mL
 At stated conc. in AcCN as DNPH derivatives 7 comps.

Acetaldehyde (1000 µg/mL)	Butyraldehyde (500 µg/mL)
Acetone (500 µg/mL)	Formaldehyde (1500 µg/mL)
Acrolein (500 µg/mL)	Propionaldehyde (500 µg/mL)
Benzaldehyde (500 µg/mL)	

Oxygenate Gasoline Additive Standard

OGAD-001 \$ 30 / 1 x 1 mL
 OGAD-001-PAK **SAVE 20%** \$ 120 / 5 x 1 mL
 At stated conc. in MeOH 5 comps.

MtBE (2000 µg/mL)	TAME (2000 µg/mL)
ETBE (2000 µg/mL)	t-Butanol (10000 µg/mL)
Isopropyl ether (2000 µg/mL)	

Reference Gas Oil Sample

RGS-001 \$ 20 / 1 x 1 mL

Hydrocarbon Mixture (boiling point range 250-850°F)

Technical Note

Alcohol Oxidation Products in Automotive Engine Exhaust by HPLC of DNPH Derivatives The California Air Resources Board, in conjunction with some of the larger automobile manufacturers, has developed an HPLC method in which the 2,4-Dinitrophenylhydrazine derivatives of the by-products are quantitated.

LUFT/LUST Standards

Florida Methods



Connecticut Method Extractable Total Petroleum Hydrocarbons

CT ETPH Alkane Standard

DRH-009S \$ 35 / 1 x 1 mL
 DRH-009S-PAK **SAVE 20%** \$ 140 / 5 x 1 mL
 1000 µg/mL in CH₂Cl₂ 15 comps.

<i>n</i> -Nonane	<i>n</i> -Tetracosane
<i>n</i> -Decane	<i>n</i> -Hexacosane
<i>n</i> -Dodecane	<i>n</i> -Octacosane
<i>n</i> -Tetradecane	<i>n</i> -Triacontane
<i>n</i> -Hexadecane	<i>n</i> -Dotriacontane
<i>n</i> -Octadecane	<i>n</i> -Tetraatriacontane
<i>n</i> -Eicosane	<i>n</i> -Hexatriacontane
<i>n</i> -Docosane	

Internal Standard

GRH-IS \$ 15 / 1 x 1 mL
 GRH-IS-PAK **SAVE 20%** \$ 60 / 5 x 1 mL
 1.0 mg/mL in CH₂Cl₂

5-alpha Androstane

Surrogate Standard

GRH-SS \$ 17 / 1 x 1 mL
 GRH-SS-PAK **SAVE 20%** \$ 68 / 5 x 1 mL
 2.0 mg/mL in Acetone

o-Terphenyl (OTP)

Florida Method Total Recoverable Petroleum Hydrocarbon (FTRPH) Standard & Surrogates

Calibration/Window Defining Hydrocarbon Standard

DRH-004S-R1-5X \$ 50 / 1 x 1 mL
 DRH-004S-R1-5X-PAK **SAVE 20%** \$ 200 / 5 x 1 mL
 1.0 mg/mL each in Chloroform 17 comps.

Octane C ₈	Eicosane C ₂₀	Dotriacontane C ₃₂
Decane C ₁₀	Docosane C ₂₂	Tetraatriacontane C ₃₄
Dodecane C ₁₂	Tetracosane C ₂₄	Hexatriacontane C ₃₆
Tetradecane C ₁₄	Hexacosane C ₂₆	Octatriacontane C ₃₈
Hexadecane C ₁₆	Octacosane C ₂₈	Tetracontane C ₄₀
Octadecane C ₁₈	Triacontane C ₃₀	

FTRPH Surrogate Standard

DRH-FL-SS-3X \$ 27 / 1 x 1 mL
 DRH-FL-SS-3X-PAK **SAVE 20%** \$ 108 / 5 x 1 mL
 3.0 mg/mL in Carbon disulfide

DRH-FL-SS \$ 20 / 1 x 1 mL
 DRH-FL-SS-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 1.0 mg/mL in Carbon disulfide

Nonatriacontane

FTRPH Combined Surrogate Standard

DRH/GRH-FL-SS \$ 50 / 1 x 1 mL
 DRH/GRH-FL-SS-PAK **SAVE 20%** \$ 200 / 5 x 1 mL
 5.0 mg/mL in Carbon disulfide 2 comps.

Nonatriacontane

o-Terphenyl (OTP)

FTRPH Calibration / Window Defining Standard

DRH-FTRPH \$ 35 / 1 x 1 mL
 DRH-FTRPH-PAK **SAVE 20%** \$ 140 / 5 x 1 mL
 500 µg/mL each in Hexane 17 comps.
 DRH-FTRPH-0.1X \$ 30 / 1 x 1 mL
 50 µg/mL each in Hexane 17 comps.

<i>n</i> -Octane	<i>n</i> -Eicosane	<i>n</i> -Dotriacontane
<i>n</i> -Decane	<i>n</i> -Docosane	<i>n</i> -Tetraatriacontane
<i>n</i> -Dodecane	<i>n</i> -Tetracosane	<i>n</i> -Hexatriacontane
<i>n</i> -Tetradecane	<i>n</i> -Hexacosane	<i>n</i> -Octatriacontane
<i>n</i> -Hexadecane	<i>n</i> -Octacosane	<i>n</i> -Tetracontane
<i>n</i> -Octadecane	<i>n</i> -Triacontane	

Technical Note

FTRPH Calibration/Window Defining Standard was formulated at a lower concentration to insure solubility of the analytes & eliminate the odor caused by the introduction of Carbon disulfide as a cosolvent.

Internal Standard

GRH-IS \$ 15 / 1 x 1 mL
 GRH-IS-PAK **SAVE 20%** \$ 60 / 5 x 1 mL
 1.0 mg/mL in CH₂Cl₂

5-alpha Androstane

Surrogate Standards

DRH-SS \$ 30 / 1 x 1 mL
 DRH-SS-PAK **SAVE 20%** \$ 120 / 5 x 1 mL
 5.0 mg/mL in THF

n-Triacontane-d₆₂

GRH-SS \$ 17 / 1 x 1 mL
 GRH-SS-PAK **SAVE 20%** \$ 68 / 5 x 1 mL
 2.0 mg/mL in Acetone

o-Terphenyl (OTP)

Technical Note

FTRPH Surrogate Standard was formulated at a higher concentration for combined DRH & GRH analysis. This standard has proven useful for those laboratories performing gasoline & diesel analysis simultaneously.

DRH/GRH-FL-SS-R2 \$ 50 / 1 x 1 mL
 DRH/GRH-FL-SS-R2-PAK **SAVE 20%** \$ 200 / 5 x 1 mL
 At stated conc. in Carbon disulfide 2 comps.

Nonatriacontane (6000 µg/mL)

o-Terphenyl (OTP) (1500 µg/mL)



Carbon disulfide can not ship by air. When possible alternate solvents can be used. Please contact our Technical Service Department for other options.



LUFT/LUST Standards

Massachusetts Methods - Ready-to-Inject Working Level EPH Standards

Massachusetts Method Determination of Extractable Petroleum Hydrocarbons (EPH)

Aromatic Hydrocarbons Calibration Set

DRH-006-CAL-SET \$ 125 / 5 x 1 mL
At stated conc. in CH₂Cl₂ 18 comps.

Components (units in µg/mL)	Level 1 (1X)	Level 2 (4X)	Level 3 (10X)	Level 4 (20X)	Level 5 (40X)
Acenaphthene	5	20	50	100	200
Acenaphthylene	5	20	50	100	200
Anthracene	5	20	50	100	200
Benz[a]anthracene	5	20	50	100	200
Benzo[a]pyrene	5	20	50	100	200
Benzo[b]fluoranthene	5	20	50	100	200
Benzo[g,h,i]perylene	5	20	50	100	200
Benzo[k]fluoranthene	5	20	50	100	200
Chrysene	5	20	50	100	200
Dibenz[a,h]anthracene	5	20	50	100	200
Fluoranthene	5	20	50	100	200
Fluorene	5	20	50	100	200
Indeno[1,2,3-cd]pyrene	5	20	50	100	200
2-Methylnaphthalene	5	20	50	100	200
Naphthalene	5	20	50	100	200
Phenanthrene	5	20	50	100	200
Pyrene	5	20	50	100	200
o-Terphenyl (Surrogate)	5	20	50	100	200

Aliphatic Hydrocarbons Calibration Set

DRH-007-CAL-R1-SET \$ 125 / 5 x 1 mL
At stated conc. in CH₂Cl₂ : n-Hexane (1:1) 15 comps.

Components (units in µg/mL)	Level 1 (1X)	Level 2 (4X)	Level 3 (10X)	Level 4 (20X)	Level 5 (40X)
n-Nonane	5	20	50	100	200
n-Decane	5	20	50	100	200
n-Dodecane	5	20	50	100	200
n-Tetradecane	5	20	50	100	200
n-Hexadecane	5	20	50	100	200
n-Octadecane	5	20	50	100	200
n-Nonadecane	5	20	50	100	200
n-Eicosane	5	20	50	100	200
n-Docosane	5	20	50	100	200
n-Tetracosane	5	20	50	100	200
n-Hexacosane	5	20	50	100	200
n-Octacosane	5	20	50	100	200
n-Triacontane	5	20	50	100	200
n-Hexatriacontane	5	20	50	100	200
1-Chlorooctadecane (Surrogate)	5	20	50	100	200

Combined Aromatic/Aliphatic Matrix Spike Standard

DRH-MS-ASL \$ 45 / 1 x 1 mL
DRH-MS-ASL-PAK **SAVE 20%** \$ 180 / 5 x 1 mL
25 µg/mL each in Hexane 31 comps.

Acenaphthene	n-Docosane	Naphthalene
Acenaphthylene	n-Dodecane	n-Nonadecane
Anthracene	n-Eicosane	n-Nonane
Benz[a]anthracene	Fluoranthene	n-Octacosane
Benzo[a]pyrene	Fluorene	n-Octadecane
Benzo[b]fluoranthene	n-Hexacosane	Phenanthrene
Benzo[g,h,i]perylene	n-Hexadecane	Pyrene
Benzo[k]fluoranthene	n-Hexatriacontane	n-Tetracosane
Chrysene	Indeno[1,2,3-cd]pyrene	n-Tetradecane
n-Decane	2-Methylnaphthalene	n-Triacontane
Dibenz[a,h]anthracene		

DEP (MA) - Fractionation Surrogate Spike

DRH-MA-FSS-10ML 40 µg/mL in Hexane \$ 25 / 1 x 10 mL
DRH-MA-FSS-50X 2.0 mg/mL in Hexane \$ 25 / 1 x 1 mL
DRH-MA-FSS-50X-PAK 2.0 mg/mL in Hexane **SAVE 20%** \$ 100 / 5 x 1 mL
2 comps.

2-Fluorobiphenyl	2-Bromonaphthalene
------------------	--------------------

Aromatic Surrogate

DRH-006-SS \$ 15 / 1 x 1 mL
DRH-006-SS-PAK **SAVE 20%** \$ 60 / 5 x 1 mL
1.0 mg/mL in CH₂Cl₂

o-Terphenyl

DEP (MA) - Aromatic Hydrocarbons

DRH-006S \$ 65 / 1 x 1 mL
DRH-006S-PAK **SAVE 20%** \$ 260 / 5 x 1 mL
1.0 mg/mL each in CH₂Cl₂ 17 comps.

Acenaphthene	Dibenz[a,h]anthracene
Acenaphthylene	Fluoranthene
Anthracene	Fluorene
Benz[a]anthracene	Indeno[1,2,3-cd]pyrene
Benzo[a]pyrene	2-Methylnaphthalene
Benzo[b]fluoranthene	Naphthalene
Benzo[g,h,i]perylene	Phenanthrene
Benzo[k]fluoranthene	Pyrene
Chrysene	

Technical Note

Two high concentration EPH stocks for laboratories that prepare in-house working level solutions are available. In addition, Ready-to-Use working level aromatic and aliphatic calibration sets are also available. Larger volumes of daily calibration solutions can be purchased by contacting our Technical Service Department.

DEP (MA) - Aliphatic Hydrocarbons

DRH-007S \$ 40 / 1 x 1 mL
DRH-007S-PAK **SAVE 20%** \$ 160 / 5 x 1 mL
1.0 mg/mL each in CH₂Cl₂ : Hexane (1:1) 14 comps.

n-Nonane	n-Octadecane	n-Hexacosane
n-Decane	n-Nonadecane	n-Octacosane
n-Dodecane	n-Eicosane	n-Triacontane
n-Tetradecane	n-Docosane	n-Hexatriacontane
n-Hexadecane	n-Tetracosane	

Aliphatic Surrogate

DRH-007-SS \$ 15 / 1 x 1 mL
DRH-007-SS-PAK **SAVE 20%** \$ 60 / 5 x 1 mL
1.0 mg/mL in Hexane

1-Chlorooctadecane

EPH Surrogate Spike

DRH-MA-SS 20 µg/mL each in Acetone \$ 10 / 1 x 1 mL
DRH-MA-SS-10X 200 µg/mL each in Acetone \$ 20 / 1 x 1 mL
DRH-MA-SS-100X 2,000 µg/mL each in Acetone \$ 22 / 1 x 1 mL
DRH-MA-SS-100X-PAK 2,000 µg/mL each in Acetone \$ 88 / 5 x 1 mL
2 comps.

1-Chlorooctadecane	o-Terphenyl
--------------------	-------------

EPH Matrix Spike

DRH-MA-MS 25 µg/mL in Acetone \$ 20 / 1 x 1 mL
DRH-MA-MS-PAK 25 µg/mL in Acetone **SAVE 20%** \$ 80 / 5 x 1 mL
DRH-MA-MS-10X 250 µg/mL in Acetone \$ 30 / 1 x 1 mL
DRH-MA-MS-10X-PAK 250 µg/mL in Acetone **SAVE 20%** \$ 120 / 5 x 1 mL
DRH-MA-MS-40X 1,000 µg/mL in Acetone \$ 30 / 1 x 1 mL
DRH-MA-MS-40X-PAK 1,000 µg/mL in Acetone **SAVE 20%** \$ 120 / 5 x 1 mL
10 comps.

Acenaphthene	n-Nonadecane
Anthracene	n-Nonane
Chrysene	n-Octacosane
n-Eicosane	Pyrene
Naphthalene	n-Tetradecane

Internal Standard

GRH-IS 1,000 µg/mL in CH₂Cl₂ \$ 15 / 1 x 1 mL
GRH-IS-PAK 1,000 µg/mL in CH₂Cl₂ **SAVE 20%** \$ 60 / 5 x 1 mL
GRH-IS-10X 10.0 mg/mL in CH₂Cl₂ \$ 30 / 1 x 1 mL

5-alpha Androstane

Massachusetts LUFT/LUST

LUFT/LUST Standards

Massachusetts Methods - Ready-to-Inject Working Level EPH Standards



Massachusetts Method Determination of Volatile Petroleum Hydrocarbons (VPH)

Stock Concentrate

Volatile Petroleum Hydrocarbon Mix

GRH-004S-10X \$ 40 / 1 x 1 mL
 GRH-004S-10X-PAK **SAVE 20%** \$ 160 / 5 x 1 mL
 At stated conc. (mg/mL) in MeOH 13 comps.

Benzene (5.0)	<i>n</i> -Pentane (10.0)
Ethylbenzene (5.0)	Toluene (15.0)
Isooctane (15.0)	1,2,4-Trimethylbenzene (10.0)
2-Methylpentane (15.0)	<i>o</i> -Xylene (10.0)
MtBE (15.0)	<i>m</i> -Xylene (10.0)
Naphthalene (10.0)	<i>p</i> -Xylene (10.0)
<i>n</i> -Nonane (10.0)	

DEP (MA)-VPH Surrogate Standard

GRH-004-SS \$ 10 / 1 x 1 mL
 GRH-004-SS-PAK **SAVE 20%** \$ 40 / 5 x 1 mL
 50 µg/mL in MeOH

GRH-004-SS-10X \$ 20 / 1 x 1 mL
 GRH-004-SS-10X-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 500 µg/mL in MeOH

GRH-004-SS-100X \$ 20 / 1 x 1 mL
 GRH-004-SS-100X-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 5,000 µg/mL in MeOH

2,5-Dibromotoluene

MA VPH Matrix Spike Mix with Surrogate

GRH-004-MS/SS \$ 30 / 1 x 1 mL
 50 µg/mL each in MeOH 14 comps.

Benzene	Naphthalene
<i>n</i> -Butylcyclohexane	<i>n</i> -Nonane
<i>n</i> -Decane	<i>n</i> -Pentane
2,5-dibromotoluene	Toluene
Ethylbenzene	1,2,4-Trimethylbenzene
2-Methylpentane	Isooctane
MtBE	<i>m</i> -Xylene

VPH Matrix Spike

GRH-004-MS \$ 15 / 1 x 1 mL
 GRH-004-MS-PAK **SAVE 20%** \$ 60 / 5 x 1 mL
 50 µg/mL each in MeOH

GRH-004-MS-10X \$ 25 / 1 x 1 mL
 GRH-004-MS-10X-PAK **SAVE 20%** \$ 100 / 5 x 1 mL
 500 µg/mL each in MeOH

GRH-004-MS-100X \$ 25 / 1 x 1 mL
 GRH-004-MS-100X-PAK **SAVE 20%** \$ 100 / 5 x 1 mL
 5,000 µg/mL each in MeOH 8 comps.

Benzene	Toluene
Ethylbenzene	<i>o</i> -Xylene
MtBE	<i>m</i> -Xylene
Naphthalene	<i>p</i> -Xylene

Certified BTEX in Unleaded Gasoline

GA-001-20X-BTEX \$ 55 / 1 x 1 mL
 10.0 mg/mL in MeOH
 Gasoline - Regular, unleaded

Volatile Petroleum Hydrocarbons without Surrogate

GRH-004S-R1-10X \$ 55 / 1 x 1 mL
 At stated conc. (mg/mL) in MeOH 15 comps.

Benzene (5.0)	Toluene (15.0)
Ethylbenzene (5.0)	1,2,4-Trimethylbenzene (10.0)
Isooctane (15.0)	<i>o</i> -Xylene (10.0)
2-Methylpentane (15.0)	<i>m</i> -Xylene (10.0)
MtBE (15.0)	<i>p</i> -Xylene (10.0)
Naphthalene (10.0)	<i>n</i> -Butylcyclohexane (10.0)
<i>n</i> -Nonane (10.0)	<i>n</i> -Decane (10.0)
<i>n</i> -Pentane (10.0)	

GRH-004S-R2 \$ 50 / 1 x 1 mL
 10 mg/mL each in MeOH 15 comps.

Benzene	Toluene
Ethylbenzene	1,2,4-Trimethylbenzene
Isooctane	<i>o</i> -Xylene
2-Methylpentane	<i>m</i> -Xylene
MtBE	<i>p</i> -Xylene
Naphthalene	<i>n</i> -Butylcyclohexane
<i>n</i> -Nonane	<i>n</i> -Decane
<i>n</i> -Pentane	

Volatile Petroleum Hydrocarbons with Surrogate

GRH-004S/SS \$ 30 / 1 x 1 mL
 GRH-004S/SS-PAK **SAVE 20%** \$ 120 / 5 x 1 mL
 At stated conc. (µg/mL) in MeOH 14 comps.

Benzene (500)	<i>n</i> -Nonane (1,000)
2,5-Dibromotoluene (Surrogate)(1,000)	<i>n</i> -Pentane (1,000)
Ethylbenzene (500)	Toluene (1,500)
Isooctane (1,500)	1,2,4-Trimethylbenzene (1,000)
2-Methylpentane (1,500)	<i>o</i> -Xylene (1,000)
MtBE (1,500)	<i>m</i> -Xylene (1,000)
Naphthalene (1,000)	<i>p</i> -Xylene (1,000)

GRH-004S/SS-R1 \$ 45 / 1 x 1 mL
 At stated conc. (µg/mL) in MeOH 16 comps.

Benzene (500)	<i>n</i> -Pentane (1,000)
2,5-Dibromotoluene (Surrogate)(1,000)	Toluene (1,500)
Ethylbenzene (500)	1,2,4-Trimethylbenzene (1,000)
Isooctane (1,500)	<i>o</i> -Xylene (1,000)
2-Methylpentane (1,500)	<i>m</i> -Xylene (1,000)
MtBE (1,500)	<i>p</i> -Xylene (1,000)
Naphthalene (1,000)	<i>n</i> -Butylcyclohexane (1,000)
<i>n</i> -Nonane (1,000)	<i>n</i> -Decane (1,000)

GRH-004S/SS-R2 \$ 50 / 1 x 1 mL
 10.0 mg/mL each in MeOH 16 comps.

Benzene	<i>n</i> -Pentane
2,5-Dibromotoluene (Surrogate)	Toluene
Ethylbenzene	1,2,4-Trimethylbenzene
Isooctane	<i>o</i> -Xylene
2-Methylpentane	<i>m</i> -Xylene
MtBE	<i>p</i> -Xylene
Naphthalene	<i>n</i> -Butylcyclohexane
<i>n</i> -Nonane	<i>n</i> -Decane

Technical Note

Calibration Curve

Analytical chemists can develop the VPH Calibration Curve using one primary dilution standard that includes the surrogate.

Simultaneous BTEX / Gasoline QA/QC

Our QC Dept. has certified the benzene, toluene, ethyl benzene and xylene concentrations in the unleaded gasoline standard (GA-001-20X-BTEX). This allows the use of a single injection to verify that the QA/QC requirements are being met for the BTEX analytes as well as for the gasoline.

Massachusetts LUFT/LUST



LUFT/LUST Standards

Mississippi / Tennessee, New Jersey and Pennsylvania Methods

Mississippi / Tennessee Method

DRO Defining Mix

DRO-AK-102-NAS-10X
DRO-AK-102-NAS-10X-PAK
2.0 mg/mL each in CH₂Cl₂

\$ 40 / 1 x 1 mL
SAVE 20% \$ 160 / 5 x 1 mL
16 comps.

<i>n</i> -Decane	<i>n</i> -Hexadecane	<i>n</i> -Heneicosane
<i>n</i> -Undecane	<i>n</i> -Heptadecane	<i>n</i> -Docosane
<i>n</i> -Dodecane	<i>n</i> -Octadecane	<i>n</i> -Tricosane
<i>n</i> -Tridecane	<i>n</i> -Nonadecane	<i>n</i> -Tetracosane
<i>n</i> -Tetradecane	<i>n</i> -Eicosane	<i>n</i> -Pentacosane
<i>n</i> -Pentadecane		

New Jersey Method

DEP (NJ) Aliphatic Hydrocarbon Standard

DRH-NJ-001S
1.0 mg/mL each in Hexane

NEW \$ 60 / 1 x 1 mL
20 comps.

<i>n</i> -Nonane	<i>n</i> -Heneicosane	<i>n</i> -Tetracontane
<i>n</i> -Decane	<i>n</i> -Docosane	<i>n</i> -Hexatriacontane
<i>n</i> -Dodecane	<i>n</i> -Tetracosane	<i>n</i> -Octatriacontane
<i>n</i> -Tetradecane	<i>n</i> -Hexacosane	<i>n</i> -Tetracontane
<i>n</i> -Hexadecane	<i>n</i> -Octacosane	Naphthalene
<i>n</i> -Octadecane	<i>n</i> -Triacontane	2-Methylnaphthalene
<i>n</i> -Eicosane	<i>n</i> -Dotriacontane	

DEP (NJ) Aromatic Hydrocarbon Standard

DRH-NJ-002S
2.0 mg/mL each in CH₂Cl₂

NEW \$ 80 / 1 x 1 mL
18 comps.

Acenaphthene	Benzo(g,h,i)perylene	Indeno(1,2,3-cd)pyrene
Acenaphthylene	Benzo(k)fluoranthene	2-Methylnaphthalene
Anthracene	Chrysene	Naphthalene
Benzo(a)anthracene	Dibenz(a,h)anthracene	Phenanthrene
Benzo(a)pyrene	Fluoranthene	Pyrene
Benzo(b)fluoranthene	Fluorene	1,2,3-Trimethylbenzene

Pennsylvania Method Storage Tank Site Closure & Monitoring Petroleum Standards

PA Extractable PAH Standard

DRH-PA-001
DRH-PA-001-PAK
2000 µg/mL each in CH₂Cl₂

\$ 25 / 1 x 1 mL
SAVE 20% \$ 100 / 5 x 1 mL
5 comps.

Benz[a]anthracene	Naphthalene
Benzo[a]pyrene	Phenanthrene
Fluorene	

PA Volatile Petroleum Standard

GRH-PA-001
GRH-PA-001-PAK
At stated conc. in MeOH

\$ 25 / 1 x 1 mL
SAVE 20% \$ 100 / 5 x 1 mL
9 comps.

Benzene	(1000 µg/mL)	<i>o</i> -Xylene	(1000 µg/mL)
Ethylbenzene	(1000 µg/mL)	<i>m</i> -Xylene	(1000 µg/mL)
MIBE	(2000 µg/mL)	<i>p</i> -Xylene	(1000 µg/mL)
Naphthalene	(1000 µg/mL)	Isopropylbenzene	(1000 µg/mL)
Toluene	(1000 µg/mL)		





Texas Method 1005 & 1006 Petroleum Storage Tanks (PST)

Stock Hydrocarbon Calibration Standard

DRH-TX-001-10X \$ 25 / 1 x 1 mL
 DRH-TX-001-10X-PAK **SAVE 20%** \$ 100 / 5 x 1 mL
 2000 µg/mL each in *n*-Pentane 12 comps.

<i>n</i> -Hexane	<i>n</i> -Tetradecane	<i>n</i> -Docosane
<i>n</i> -Octane	<i>n</i> -Hexadecane	<i>n</i> -Tetracosane
<i>n</i> -Decane	<i>n</i> -Octadecane	<i>n</i> -Hexacosane
<i>n</i> -Dodecane	<i>n</i> -Eicosane	<i>n</i> -Octacosane

Gasoline & Diesel Calibration Curve Set

DRH-TX-002-D-SET \$ 75 / 8 x 1 mL
 Each at stated conc. in CH₂Cl₂ 2 comps.

Regular Unleaded Gasoline #2 Diesel Fuel

Each set contains 8 concentrations:

5 µg/mL	50 µg/mL	200 µg/mL	1000 µg/mL
20 µg/mL	100 µg/mL	500 µg/mL	5000 µg/mL

Gasoline/Diesel Continuing Calibration Standard

DRH-TX-002-D-0.4X-10ML \$ 50 / 1 x 10 mL
 200 µg/mL each in CH₂Cl₂ 2 comps.

Regular Unleaded Gasoline #2 Diesel Fuel

Gasoline/Diesel Calibration/Matrix Spike Standard

DRH-TX-002-10X \$ 25 / 1 x 1 mL
 DRH-TX-002-10X-PAK **SAVE 20%** \$ 100 / 5 x 1 mL
 5000 µg/mL each in MeOH 2 comps.

Regular Unleaded Gasoline #2 Diesel Fuel

Stock Gasoline/Diesel Calibration Standard

DRH-TX-002-D-40X \$ 25 / 1 x 1 mL
 DRH-TX-002-D-40X-PAK **SAVE 20%** \$ 100 / 5 x 1 mL
 20,000 µg/mL each in CH₂Cl₂ 2 comps.

Regular Unleaded Gasoline #2 Diesel Fuel

Technical Note

TCEQ Methods 1005 and 1006

Texas Commission on Environmental Quality (TCEQ) has developed these methods in response to notifications of leaking petroleum storage tanks that have contaminated ground water. These methods govern the testing of Total Petroleum Hydrocarbon (TPH) concentrations.

Gasoline & Diesel Calibration Curve Set

DRH-TX-003-SET \$ 125 / 8 x 1 mL
 Each at stated conc. in Pentane 2 comps.

Regular Unleaded Gasoline #2 Diesel Fuel

Each set contains 8 concentrations:

20 µg/mL	250 µg/mL	750 µg/mL	5000 µg/mL
100 µg/mL	500 µg/mL	1000 µg/mL	10,000 µg/mL

Gasoline and Diesel Standard

DRH-TX-003-20X \$ 25 / 1 x 5 mL
 DRH-TX-003-20X-PAK **SAVE 20%** \$ 100 / 5 x 5 mL
 10,000 µg/mL each in Pentane 2 comps.

Regular Unleaded Gasoline #2 Diesel Fuel

Surrogate Standard

DRH-TX-003-SS1 \$ 35 / 1 x 5 mL
 DRH-TX-003-SS1-PAK **SAVE 20%** \$ 140 / 5 x 5 mL
 10 mg/mL each in Pentane 2 comps.

1-Chlorooctadecane 1-Chlorooctane

Carbon Number Distribution Maker

DRH-TX-003-CNM \$ 30 / 1 x 1 mL
 DRH-TX-003-CNM-PAK **SAVE 20%** \$ 120 / 5 x 1 mL
 2000 µg/mL each in Pentane 9 comps.

<i>n</i> -Decane	<i>n</i> -Heptane	<i>n</i> -Octacosane
<i>n</i> -Dodecane	<i>n</i> -Hexadecane	<i>n</i> -Octane
<i>n</i> -Heneicosane	<i>n</i> -Hexane	<i>n</i> -Pentatriacontane

Aromatic Fractionation Check Standard

DRH-TX-003-FCS \$ 55 / 1 x 10 mL
 DRH-TX-003-FCS-PAK **SAVE 20%** \$ 220 / 5 x 10 mL
 20 µg/mL each in Pentane 24 comps.

Acenaphthene	Benzo[e]pyrene	Naphthalene
Acenaphthylene	Benzo[g,h,i]perylene	Phenanthrene
Anthracene	Chrysene	Pyrene
Benzene	Dibenz[a,h]anthracene	Toluene
Benz[a]anthracene	Ethylbenzene	1,2,3-Trimethylbenzene
Benzo[b]fluoranthene	Fluoranthene	<i>m</i> -Xylene
Benzo[k]fluoranthene	Fluorene	<i>p</i> -Xylene
Benzo[a]pyrene	Indeno[1,2,3-cd]pyrene	<i>o</i> -Xylene



LUFT/LUST Standards

Washington Methods

Washington Method Determination of Volatile Petroleum Hydrocarbons (VPH)

VPH Standard

VPH-WA \$ 20 / 1 x 1 mL
VPH-WA-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 200 µg/mL each in MeOH 15 comps.

Benzene	<i>p</i> -Xylene	<i>n</i> -Decane
Ethylbenzene	MtBE	<i>n</i> -Dodecane
Toluene	<i>n</i> -Pentane	1-Methylnaphthalene
<i>o</i> -Xylene	<i>n</i> -Hexane	Naphthalene
<i>m</i> -Xylene	<i>n</i> -Octane	1,2,3-Trimethylbenzene

VPH Primary Dilution Standard with Surrogate

VPH-WA-SS-10X \$ 35 / 1 x 1 mL
VPH-WA-SS-10X-PAK **SAVE 20%** \$ 140 / 5 x 1 mL
 2,000 µg/mL each in MeOH 16 comps.

Benzene	MtBE	<i>n</i> -Dodecane
Ethylbenzene	<i>n</i> -Pentane	1-Methylnaphthalene
Toluene	<i>n</i> -Hexane	Naphthalene
<i>o</i> -Xylene	<i>n</i> -Octane	1,2,3-Trimethylbenzene
<i>m</i> -Xylene	<i>n</i> -Decane	2,5-Dibromotoluene (surrogate)
<i>p</i> -Xylene		

Stock Concentrate VPH Standards

VPH-WA-10X \$ 30 / 1 x 1 mL
VPH-WA-10X-PAK **SAVE 20%** \$ 120 / 5 x 1 mL
 2,000 µg/mL each in MeOH 15 comps.
 VPH-WA-100X \$ 40 / 1 x 1 mL
VPH-WA-100X-PAK **SAVE 20%** \$ 160 / 5 x 1 mL
 20.0 mg/mL each in MeOH 15 comps.

Benzene	<i>p</i> -Xylene	<i>n</i> -Decane
Ethylbenzene	MtBE	<i>n</i> -Dodecane
Toluene	<i>n</i> -Pentane	1-Methylnaphthalene
<i>o</i> -Xylene	<i>n</i> -Hexane	Naphthalene
<i>m</i> -Xylene	<i>n</i> -Octane	1,2,3-Trimethylbenzene

Certified BTEX in Unleaded Gasoline (Single Source)

GA-001-20X-BTEX \$ 55 / 1 x 1 mL
 10.0 mg/mL in MeOH
 Regular Unleaded Gasoline

Certified BTEX in Gasoline Composite (Multi Source)

GRO-AK-101-GCS-BTEX \$ 55 / 1 x 1 mL
 5 mg/mL in MeOH 3 comps.

	Wt. Vol.
Gasoline (Premium)	1.66 mg/mL
Gasoline (Regular Leaded)	1.67 mg/mL
Gasoline (Regular Unleaded)	1.67 mg/mL

VPH Matrix Spike

VPH-WA-MS \$ 25 / 1 x 1 mL
VPH-WA-MS-PAK **SAVE 20%** \$ 100 / 5 x 1 mL
 Varied conc. in MeOH 11 comps.

Benzene	(60 µg/mL)	Toluene	(60 µg/mL)
Ethylbenzene	(60 µg/mL)	1,2,3-Trimethylbenzene	(60 µg/mL)
MtBE	(180 µg/mL)	<i>m</i> -Xylene	(60 µg/mL)
Naphthalene	(360 µg/mL)	<i>p</i> -Xylene	(60 µg/mL)
<i>n</i> -Nonane	(200 µg/mL)	<i>o</i> -Xylene	(60 µg/mL)
<i>n</i> -Pentane	(600 µg/mL)		

VPH Surrogate Standard

GRH-004-SS \$ 10 / 1 x 1 mL
GRH-004-SS-PAK **SAVE 20%** \$ 40 / 5 x 1 mL
 50 µg/mL in MeOH
 GRH-004-SS-10X \$ 20 / 1 x 1 mL
GRH-004-SS-10X-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 500 µg/mL in MeOH
 GRH-004-SS-100X \$ 20 / 1 x 1 mL
GRH-004-SS-100X-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 5,000 µg/mL in MeOH
 2,5-Dibromotoluene

VPH Retention Time Marker

VPH-WA-RT \$ 20 / 1 x 1 mL
VPH-WA-RT-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 2,000 µg/mL each in MeOH 6 comps.

<i>n</i> -Pentane	<i>n</i> -Octane	<i>n</i> -Dodecane
<i>n</i> -Hexane	<i>n</i> -Decane	<i>n</i> -Tridecane

1,2,3-Trimethylbenzene Standard

V-028S-D-10X \$ 20 / 1 x 1 mL
V-028S-D-10X-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 1000 µg/mL each in CH₂Cl₂
 1,2,3-Trimethylbenzene

Technical Note

Simultaneous BTEX / Gasoline QA/QC

Our QC Department has certified the benzene, toluene, ethyl benzene and xylene concentrations in the unleaded gasoline standard GA-001-20X-BTEX and GRO-AK-101-GCS-BTEX. This allows the use of a single injection to verify that the QA/QC requirements are being met for the BTEX analytes as well as for the gasoline.

We have added a multi source certified BTEX in gasoline composite mix GRO-AK-101-GCS-BTEX. The BTEX values for this multi-source calibration standard have been determined through in-house analysis against a BTEX multi-level calibration curve listed on the certificate.

LUFT/LUST Standards

Washington, Wisconsin Methods



Washington Method Determination of Extractable Petroleum Hydrocarbons (EPH)

EPH Aromatic/PAH Standard

EPH-WA-10X		\$ 75 / 1 x 1 mL
EPH-WA-10X-PAK	SAVE 20%	\$ 300 / 5 x 1 mL
1.0 mg/mL each in CH ₂ Cl ₂		
Acenaphthene	Benzo[g,h,i]perylene	Indeno[1,2,3-cd]pyrene
Acenaphthylene	Benzo[k]fluoranthene	2-Methylnaphthalene
Anthracene	Chrysene	Naphthalene
Benz[a]anthracene	Dibenz[a,h]anthracene	Phenanthrene
Benzo[a]pyrene	Fluoranthene	Pyrene
Benzo[b]fluoranthene	Fluorene	1,2,3-Trimethylbenzene

Internal Standard

GRH-IS		\$ 15 / 1 x 1 mL
GRH-IS-PAK	SAVE 20%	\$ 60 / 5 x 1 mL
1000 µg/mL in CH ₂ Cl ₂		
GRH-IS-10X		\$ 30 / 1 x 1 mL
10.0 mg/mL in CH ₂ Cl ₂		
5-alpha Androstane		

EPH Surrogate Spike

DRH-MA-SS		\$ 10 / 1 x 1 mL
20 µg/mL each in Acetone		
DRH-MA-SS-10X		\$ 20 / 1 x 1 mL
200 µg/mL each in Acetone		
DRH-MA-SS-100X		\$ 22 / 1 x 1 mL
DRH-MA-SS-100X-PAK	SAVE 20%	\$ 88 / 5 x 1 mL
2,000 µg/mL each in Acetone		
1-Chlorooctadecane	o-Terphenyl	

EPH Matrix Spike

EPH-WA-MS2-20ML		\$ 30 / 1 x 20 mL
EPH-WA-MS2-20ML-PAK	SAVE 20%	\$ 120 / 5 x 20 mL
25 µg/mL each in Acetone		
Acenaphthene	n-Decane	n-Heneicosane
Anthracene	n-Dodecane	Naphthalene
Benzo[g,h,i]perylene	n-Hexadecane	Pyrene
Benzo[a]pyrene		

EPH Aliphatic Check Mix

EPH-WA-ALI		\$ 20 / 1 x 1 mL
EPH-WA-ALI-PAK	SAVE 20%	\$ 80 / 5 x 1 mL
1.0 mg/mL each in CH ₂ Cl ₂		
n-Octane	n-Dodecane	n-Heneicosane
n-Decane	n-Hexadecane	

EPH Aromatic Check Mix

EPH-WA-ARO		\$ 30 / 1 x 1 mL
EPH-WA-ARO-PAK	SAVE 20%	\$ 120 / 5 x 1 mL
1.0 mg/mL each in CH ₂ Cl ₂		
Acenaphthene	Naphthalene	1,2,3-Trimethylbenzene
Benzo[g,h,i]perylene	Pyrene	

Revised EPH Aliphatic Check Mix

EPH-WA-ALI-R1		\$ 20 / 1 x 1 mL
EPH-WA-ALI-R1-PAK	SAVE 20%	\$ 80 / 5 x 1 mL
1.0 mg/mL each in CH ₂ Cl ₂		
n-Octane	n-Dodecane	n-Heneicosane
n-Decane	n-Hexadecane	n-Tetracontane

EPH Fractionation Check Standard

EPH-WA-FCS		\$ 45 / 1 x 1 mL
EPH-WA-FCS-PAK	SAVE 20%	\$ 180 / 5 x 1 mL
25 µg/mL each in Hexane		
Acenaphthene	Chrysene	Pyrene
Acenaphthylene	Dibenz[a,h]anthracene	n-Decane
Anthracene	Fluoranthene	n-Dodecane
Benz[a]anthracene	Fluorene	n-Tetradecane
Benzo[a]pyrene	Indeno[1,2,3-cd]pyrene	n-Hexadecane
Benzo[b]fluoranthene	2-Methylnaphthalene	n-Octadecane
Benzo[g,h,i]perylene	Naphthalene	n-Eicosane
Benzo[k]fluoranthene	Phenanthrene	n-Heneicosane

Revised EPH Fractionation Check Standard

EPH-WA-FCS-R1		\$ 45 / 1 x 1 mL
EPH-WA-FCS-R1-PAK	SAVE 20%	\$ 180 / 5 x 1 mL
25 µg/mL each in Hexane		
Acenaphthene	Chrysene	Pyrene
Acenaphthylene	Dibenz[a,h]anthracene	n-Octane
Anthracene	Fluoranthene	n-Decane
Benz[a]anthracene	Fluorene	n-Dodecane
Benzo[a]pyrene	Indeno[1,2,3-cd]pyrene	n-Hexadecane
Benzo[b]fluoranthene	2-Methylnaphthalene	n-Heneicosane
Benzo[g,h,i]perylene	Naphthalene	n-Tetracontane
Benzo[k]fluoranthene	Phenanthrene	

1,2,3-Trimethylbenzene Standard

V-028S-D-10X		\$ 20 / 1 x 1 mL
V-028S-D-10X-PAK	SAVE 20%	\$ 80 / 5 x 1 mL
1000 µg/mL each in CH ₂ Cl ₂		
1,2,3-Trimethylbenzene		

Revised EPH Aromatic Check Mix

EPH-WA-ARO-R1		\$ 30 / 1 x 1 mL
EPH-WA-ARO-R1-PAK	SAVE 20%	\$ 120 / 5 x 1 mL
1.0 mg/mL each in CH ₂ Cl ₂		
Acenaphthene	Naphthalene	1,2,3-Trimethylbenzene
Benzo[g,h,i]perylene	Pyrene	Toluene

Aliphatic Surrogate

DRH-007-SS		\$ 15 / 1 x 1 mL
DRH-007-SS-PAK	SAVE 20%	\$ 60 / 5 x 1 mL
1.0 mg/mL in Hexane		
1-Chlorooctadecane		

Aromatic Surrogate

DRH-006-SS		\$ 15 / 1 x 1 mL
DRH-006-SS-PAK	SAVE 20%	\$ 60 / 5 x 1 mL
1.0 mg/mL in CH ₂ Cl ₂		
o-Terphenyl		

Wisconsin Method

Wisconsin DNR - Gasoline Range Hydrocarbons

GRH-003S		\$ 35 / 1 x 1 mL
GRH-003S-PAK	SAVE 20%	\$ 140 / 5 x 1 mL
2.0 mg/mL each in MeOH		
Benzene	Toluene	o-Xylene
Ethylbenzene	1,2,4-Trimethylbenzene	m-Xylene
MtBE	1,3,5-Trimethylbenzene	p-Xylene
Naphthalene		

WA, WI LUFT/LUST



LUFT/LUST Standards

Gasoline Range Hydrocarbon (GRH)

Gasoline Range Hydrocarbon Analysis

EPA Method - Gasoline Range Hydrocarbons

Gasoline Standard

GRH-002S \$ 25 / 1 x 1 mL
 GRH-002S-10X \$ 30 / 1 x 1 mL
 At stated conc. in MeOH 10 comps.

	GRH-002S	GRH-002-10X
2-Methylpentane	(1.5 mg/mL)	(15 mg/mL)
2,2,4-Trimethylpentane	(1.5 mg/mL)	(15 mg/mL)
Heptane	(0.5 mg/mL)	(5 mg/mL)
Benzene	(0.5 mg/mL)	(5 mg/mL)
Toluene	(1.5 mg/mL)	(15 mg/mL)
Ethylbenzene	(0.5 mg/mL)	(5 mg/mL)
m-Xylene	(1.0 mg/mL)	(10 mg/mL)
p-Xylene	(1.0 mg/mL)	(10 mg/mL)
o-Xylene	(1.0 mg/mL)	(10 mg/mL)
1,2,4-Trimethylbenzene	(1.0 mg/mL)	(10 mg/mL)

Internal Standard

GARH-IS \$ 15 / 1 x 1 mL
 1.0 mg/mL in CH₂Cl₂
 Chloro-4-fluorobenzene

Surrogate Standard

GARH-SS \$ 20 / 1 x 1 mL
 2.5 mg/mL in Acetone
 4-Bromofluorobenzene

Gasoline Additives

GAD-001 \$ 20 / 1 x 1 mL
 GAD-001-PAK **SAVE 20%** \$ 80 / 5 x 1 mL
 0.2 mg/mL each in MeOH 4 comps.
 Dibromomethane 1,2-Dichloroethane
 1,2-Dibromoethane Methyl t-butyl ethera

Technical Note

Simultaneous BTEX / Gasoline QA/QC

We have certified the benzene, toluene, ethyl benzene and xylene concentrations in the unleaded gasoline standard (GA-001-20X-BTEX). This allows the use of a single injection to verify that the QA/QC requirements are being met for the BTEX analytes as well as for the gasoline.

Certified BTEX in Unleaded Gasoline

GA-001-20X-BTEX \$ 55 / 1 x 1 mL
 10.0 mg/mL in MeOH
 Regular unleaded gasoline

Hexadecane Extraction Volatiles

CLP-BTEX \$ 30 / 1 x 1 mL
 CLP-BTEX-PAK **SAVE 20%** \$ 120 / 5 x 1 mL
 0.2 mg/mL each in MeOH 6 comps.
 CLP-BTEX-10X \$ 30 / 1 x 1 mL
 CLP-BTEX-10X-PAK **SAVE 20%** \$ 120 / 5 x 1 mL
 2.0 mg/mL each in MeOH 6 comps.

Benzene	o-Xylene
Ethyl benzene	m-Xylene
Toluene	p-Xylene

California - Gasoline Range Hydrocarbons

S-603A-10X \$ 25 / 1 x 1 mL
 S-603A-10X-PAK **SAVE 20%** \$ 100 / 5 x 1 mL
 2.0 mg/mL each in MeOH 7 comps.

Benzene	o-Xylene
Ethylbenzene	m-Xylene
Methyl t-butyl ether	p-Xylene
Toluene	

Los Angeles County Well Investigation and Monitoring Program

Purgeable Aromatics - Gasoline ID

M-602-GAS-10X \$ 30 / 1 x 1 mL
 2.0 mg/mL each in MeOH 11 comps.

Benzene	Toluene
Chlorobenzene	o-Xylene
1,2-Dichlorobenzene	p-Xylene
1,3-Dichlorobenzene	m-Xylene
1,4-Dichlorobenzene	MtBE
Ethylbenzene	

Oxygenate Gasoline Additive Standard

OGAD-001 \$ 30 / 1 x 1 mL
 OGAD-001-PAK **SAVE 20%** \$ 120 / 5 x 1 mL
 At stated conc. in MeOH 5 comps.

MtBE (2000 µg/mL)	TAME (2000 µg/mL)
ETBE (2000 µg/mL)	t-Butanol (10000 µg/mL)
Isopropyl ether (2000 µg/mL)	

Ethanol

M-8015B/5031-11 \$ 25 / 1 x 1 mL
 10 mg/mL in Water

Methanol

M-8015B/5031-17 \$ 20 / 1 x 1 mL
 10 mg/mL in Water

Pennsylvania DER - Gasoline Range Hydrocarbons

GRH-001S \$ 25 / 1 x 1 mL
 GRH-001S-PAK **SAVE 20%** \$ 100 / 5 x 1 mL
 1.0 mg/mL each in MeOH 10 comps.

Benzene	1,2,4-Trimethylbenzene
Ethylbenzene	2,2,4-Trimethylpentane
Heptane	o-Xylene
2-Methyl pentane	m-Xylene
Toluene	p-Xylene

Wisconsin DNR - Gasoline Range Hydrocarbons

GRH-003S \$ 35 / 1 x 1 mL
 GRH-003S-PAK **SAVE 20%** \$ 140 / 5 x 1 mL
 2.0 mg/mL each in MeOH 10 comps.

Benzene	1,2,4-Trimethylbenzene
Ethylbenzene	1,3,5-Trimethylbenzene
MtBE	o-Xylene
Naphthalene	m-Xylene
Toluene	p-Xylene

LUFT/LUST Standards

Diesel Range Hydrocarbons (DRH)



Diesel Range Hydrocarbon Analysis

EPA Method - Diesel Range Hydrocarbons

DRH-001S \$ 20 / 1 x 1 mL
0.2 mg/mL each in CH₂Cl₂: Hexane (1:1)
10 comps.

DRH-001S-10X \$ 30 / 1 x 1 mL
2.0 mg/mL each in CH₂Cl₂: Hexane (1:1)
10 comps.

n-Decane C₁₀ *n*-Hexadecane C₁₆ *n*-Docosane C₂₂ *n*-Hexacosane C₂₆
n-Dodecane C₁₂ *n*-Octadecane C₁₈ *n*-Tetracosane C₂₄ *n*-Octacosane C₂₈
n-Tetradecane C₁₄ *n*-Eicosane C₂₀

Surrogate Standard

GRH-SS \$ 17 / 1 x 1 mL
GRH-SS-PAK SAVE 20% \$ 68 / 5 x 1 mL

2.0 mg/mL in Acetone

o-Terphenyl (OTP)

Internal Standard

GRH-IS \$ 15 / 1 x 1 mL
GRH-IS-PAK SAVE 20% \$ 60 / 5 x 1 mL

1.0 mg/mL in CH₂Cl₂

5- α Androstane

Calibration/Window Defining Hydrocarbon Standard

DRH-004S-R1-5X \$ 50 / 1 x 1 mL
DRH-004S-R1-5X-PAK SAVE 20% \$ 200 / 5 x 1 mL

1.0 mg/mL each in Chloroform

17 comps.

Octane C₈ Octadecane C₁₈ Hexacosane C₂₆ Tetratriacontane C₃₄
Decane C₁₀ Eicosane C₂₀ Octacosane C₂₈ Hexatriacontane C₃₆
Dodecane C₁₂ Docosane C₂₂ Triacontane C₃₀ Octatriacontane C₃₈
Tetradecane C₁₄ Tetracosane C₂₄ Dotriacontane C₃₂ Tetracontane C₄₀
Hexadecane C₁₆

Surrogate Standard

DRH-SS \$ 30 / 1 x 1 mL
DRH-SS-PAK SAVE 20% \$ 120 / 5 x 1 mL

5.0 mg/mL in THF

n-Triacontane-d₃₂

D-2887 Calibration Solution

Calibration Solution

DRH-002S \$ 45 / 1 x 1 mL
At stated conc. in CS₂ 17 comps.

Hexane (600 μ g/mL) Dodecane (1,200 μ g/mL) Octacosane (100 μ g/mL)
Heptane (600 μ g/mL) Tetradecane (1,200 μ g/mL) Dotriacontane (100 μ g/mL)
Octane (800 μ g/mL) Hexadecane (1,000 μ g/mL) Hexatriacontane (100 μ g/mL)
Nonane (800 μ g/mL) Octadecane (500 μ g/mL) Tetracontane (100 μ g/mL)
Decane (1,200 μ g/mL) Eicosane (200 μ g/mL) Tetratriacontane (100 μ g/mL)
Undecane (1,200 μ g/mL) Tetracosane (200 μ g/mL)

Column Test Mixture

ASTM-D2887 \$ 10 / 1 x 1 mL
1% v/v in *n*-Octane 2 comps.

n-Hexadecane

n-Octadecane

Wisconsin Diesel Range Hydrocarbons

DRH-003S \$ 20 / 1 x 1 mL
0.2 mg/mL each in Hexane 11 comps.

n-Decane C₁₀ *n*-Tetradecane C₁₄ *n*-Octadecane C₁₈
n-Undecane C₁₁ *n*-Pentadecane C₁₅ *n*-Nonadecane C₁₉
n-Dodecane C₁₂ *n*-Hexadecane C₁₆ *n*-Eicosane C₂₀
n-Tridecane C₁₃ *n*-Heptadecane C₁₇

Complete Hydrocarbon Analysis

Multi-State Hydrocarbon Window Defining Standard

DRH-008S-R2 \$ 65 / 1 x 1 mL
DRH-008S-R2-PAK SAVE 20% \$ 260 / 5 x 1 mL
500 μ g/mL each in Chloroform 35 comps.

Octane	Heptadecane	Tetracosane	Trtriacontane
Nonane	Pristane	Pentacosane	Tetratriacontane
Decane	Octadecane	Hexacosane	Pentatriacontane
Undecane	Phytane	Heptacosane	Hexatriacontane
Dodecane	Nonadecane	Octacosane	Heptatriacontane
Tridecane	Eicosane	Nonacosane	Octatriacontane
Tetradecane	Heneicosane	Triacontane	Nonatriacontane
Pentadecane	Docosane	<i>n</i> -Hentriacontane	Tetracontane
Hexadecane	Tricosane	Dotriacontane	

Technical Note

We offer a hydrocarbon window defining standard with the C₉ to C₃₅ odd and even Alkanes. Use of this one standard should meet the numerous state to state variations for hydrocarbon validation and reporting. As an added benefit pristane and phytane are included in the formulation. This one standard can meet numerous LUFT/LUST programs requiring that the C₁₇/*i*pristane and C₁₈/*i*phytane ratio be used to estimate subsurface degradation of fuel oil spills.

A fuel oil degradation mixture containing just the four required analytes to determine the C₁₇/*i*pristane and C₁₈/*i*phytane ratio (DRH-005S-10X) is also available.

Fuel Oil Degradation/Retention Time Mixture for Quantification of C₁₇/*i*Pristane and C₁₈/*i*Phytane Ratios

DRH-005S-10X \$ 20 / 1 x 1 mL
2.0 mg/mL each in CH₂Cl₂ : CS₂ (1:1) 4 comps.

Heptadecane	Phytane (2,6,10,14-Tetramethylhexadecane)
Octadecane	Pristane (2,6,10,14-Tetramethylpentadecane)

Hydrocarbon Window Defining Standard Set

DRH-FTRPH-SET \$ 80 / 2 x 1 mL
(DRH-FTRPH, DRH-FTRPH2)
DRH-FTRPH-SET-PAK SAVE 20% \$ 320 / 5 (2 x 1 mL)
500 μ g/mL each in Hexane

FTRPH Calibration/Window Defining Standard

DRH-FTRPH \$ 35 / 1 x 1 mL
DRH-FTRPH-PAK SAVE 20% \$ 140 / 5 x 1 mL
500 μ g/mL each in Hexane 17 comps.

<i>n</i> -Octane	<i>n</i> -Octadecane	<i>n</i> -Hexacosane	<i>n</i> -Tetratriacontane
<i>n</i> -Decane	<i>n</i> -Eicosane	<i>n</i> -Octacosane	<i>n</i> -Hexatriacontane
<i>n</i> -Dodecane	<i>n</i> -Docosane	<i>n</i> -Triacontane	<i>n</i> -Octatriacontane
<i>n</i> -Tetradecane	<i>n</i> -Tetracosane	<i>n</i> -Dotriacontane	<i>n</i> -Tetracontane
<i>n</i> -Hexadecane			

Hydrocarbon Window Defining Standard

DRH-FTRPH2 \$ 60 / 1 x 1 mL
DRH-FTRPH2-PAK SAVE 20% \$ 240 / 5 x 1 mL
500 μ g/mL each in Hexane 18 comps.

<i>n</i> -Nonane	Pristane	<i>n</i> -Pentacosane	<i>n</i> -Trtriacontane
<i>n</i> -Undecane	Phytane	<i>n</i> -Heptacosane	<i>n</i> -Pentatriacontane
<i>n</i> -Tridecane	<i>n</i> -Nonadecane	<i>n</i> -Nonacosane	<i>n</i> -Heptatriacontane
<i>n</i> -Pentadecane	<i>n</i> -Heneicosane	<i>n</i> -Hentriacontane	<i>n</i> -Nonatriacontane
<i>n</i> -Heptadecane	<i>n</i> -Tricosane		

DRH LUFT/LUST



LUFT/LUST Standards

Oil, Grease & TPH (Method 1664, 413.2/418.1 & 8440) Weathered Fuel Sets

Method 1664 Oil, Grease & Total Petroleum Hydrocarbon Determination

Precision and Recovery (PAR) Spiking Solution

M-1664-5ML	\$ 15 / 1 x 5 mL
M-1664-5ML-PAK	SAVE 20% \$ 60 / 5 x 5 mL
4.0 mg/mL each in Acetone	
M-1664-20ML	\$ 25 / 1 x 20 mL
M-1664-20ML-PAK	SAVE 20% \$ 100 / 5 x 20 mL
4.0 mg/mL each in Acetone	2 comps.

Hexadecane

Stearic acid

Silica Gel Hexane Extraction Material

SGT-HEM	\$ 15 / 1 x 1 mL
20 µg/mL each in Acetone	2 comps.

Stearic acid

Hexadecane

Technical Note

Precision and Recovery (PAR) Spiking Solution was developed for Method 1664. This performance based method was developed to replace previous gravimetric procedures which incorporated Freon-113 as the extraction solvent for the determination of Oil and Grease and Total Petroleum Hydrocarbons. Each standard is packaged in a flame sealed ampule conveniently sized for quality control of the analytical batch.

Method 413.2 & 418.1 Total Petroleum Hydrocarbon Analysis by IR

Oil, Grease & Petroleum Hydrocarbon Concentrates Mix

M-418-CON	\$ 35 / 1 x 1 mL
% by volume	3 comps.
Chlorobenzene (25.0)	Hexadecane (37.5)
Isooctane (37.5)	

Oil, Grease and Petroleum Hydrocarbon Total Recoverable (IR Method)

M-418	\$ 30 / 1 x 1 mL
M-418-PAK	SAVE 20% \$ 120 / 5 x 1 mL
Total 4.15 mg/mL in Freon 113, (Parts by volume)	3 comps.
Chlorobenzene (10.0)	Isooctane (15.0)
n-Hexadecane (15.0)	

Method 8440 Total Petroleum Hydrocarbon Analysis

Total Recoverable Petroleum Hydrocarbon Mix

M-8440	\$ 20 / 1 x 1 mL
M-8440-PAK	SAVE 20% \$ 80 / 5 x 1 mL
At stated conc. in Tetrachloroethene	3 comps.
Chlorobenzene (0.10 w/w %)	Isooctane (0.15 w/w %)
n-Hexadecane (0.15 w/w %)	

Leaking Underground Storage Tank Retention Time Standard

This product can be used to screen a sample to determine what type of petroleum spill that may have caused the contamination.

Silica Gel Cleanup Calibration Solution

M-8440-SGC	\$ 10 / 1 x 1 mL
M-8440-SGC-PAK	SAVE 20% \$ 40 / 5 x 1 mL
10.0 mg/mL in Tetrachloroethene	
Corn Oil	

Retention Time Standard

DRH-010S	\$ 20 / 1 x 1 mL	
DRH-010S-PAK	SAVE 20% \$ 80 / 5 x 1 mL	
25 µg/mL each in CH ₂ Cl ₂	7 comps.	
n-Hexane	n-Tetracosane	n-Triacontane
n-Decane	n-Octacosane	n-Tetracontane
n-Dodecane		

Total Petroleum Hydrocarbon Concentrate Mix

M-8440-CON	\$ 30 / 1 x 1 mL
M-8440-CON-PAK	SAVE 20% \$ 120 / 5 x 1 mL
	3 comps.
Chlorobenzene (25.0 vol %)	Isooctane (37.5 vol %)
n-Hexadecane (37.5 vol %)	

Technical Note

A sample showing peaks in the C₆-C₁₀ range generally indicates a gasoline spill. Samples with the peaks in the C₁₂-C₂₄ range are indicative of a diesel spill while samples with the higher carbon numbers above C₂₄ are typically oils or lubricants. Once the initial screen is complete, more detailed work can be done to further identify the contaminant.

Standards of Interest

See our Weathered LUFT/LUST Fuel Set in the Fuel and Hydrocarbon Section - pages 318-319

Wear Metals

AA, ICP, DCP & XRF Analysis



These Standards were formulated for the analysis of metals in oils and other organic matrices. The curves generated provide a convenient way to analyze for metals (wear metals, additives and contaminants) in lubricating oils, gasolines, residual oils, crude oils, turbine fuels and environmental samples. All standards undergo rigorous quality assurance checks. Major constituents in the final Standard are typically analyzed by both plasma emission and rotrode techniques. Organometallic Standards listed on this page may contain sulfur which can be introduced by possible sulfonate starting materials used to formulate the actual organometallic standard. We developed a Premium Organometallic line for chemists preferring to have organometallic standards with <1 ppm sulfur or phosphorous (see Table of Contents).

- Single & Multi Element Standards
- Prepared Calibration Curves
- Formulated from Ultra High Purity Organometallic starting materials & matrices
- Certificate of Analysis

Single Element Wear Metals

Organometallic ICP/XRF

Element	1000 µg/g in 75 cSt base oil		5000 µg/g in 75 cSt base oil	
	Cat. No. (50 g)	Price	Cat. No. (50 g)	Price
Al (Aluminum)	WM-75CST-01	\$ 38	WM-75CST-01-5X	\$ 48
Sb (Antimony)	WM-75CST-02	38	WM-75CST-02-5X	48
As (Arsenic)	WM-75CST-03	44	-----	----
Ba (Barium)	WM-75CST-04	38	WM-75CST-04-5X	48
Be (Beryllium)	WM-75CST-05	41	-----	----
Bi (Bismuth)	WM-75CST-06	38	WM-75CST-06-5X	221
B (Boron)	WM-75CST-07	38	WM-75CST-07-5X	48
Cd (Cadmium)	WM-75CST-08	38	WM-75CST-08-5X	48
Ca (Calcium)	WM-75CST-09	38	WM-75CST-09-5X	48
Cr (Chromium)	WM-75CST-13	38	WM-75CST-13-5X	48
Co (Cobalt)	WM-75CST-14	38	WM-75CST-14-5X	48
Cu (Copper)	WM-75CST-15	38	WM-75CST-15-5X	48
Fe (Iron)	WM-75CST-27	38	WM-75CST-27-5X	48
La (Lanthanum)	WM-75CST-28	84	-----	----
Pb (Lead)	WM-75CST-29	38	WM-75CST-29-5X	48
Li (Lithium)	WM-75CST-30	38	WM-75CST-30-5X	48
Mg (Magnesium)	WM-75CST-32	38	WM-75CST-32-5X	48
Mn (Manganese)	WM-75CST-33	38	WM-75CST-33-5X	48
Hg (Mercury)	WM-75CST-34	44	-----	----
Mo (Molybdenum)	WM-75CST-35	38	WM-75CST-35-5X	48
Ni (Nickel)	WM-75CST-37	38	WM-75CST-37-5X	48
P (Phosphorous)	WM-75CST-41	38	WM-75CST-41-5X	48
K (Potassium)	WM-75CST-43	38	WM-75CST-43-5X	48
Sc (Scandium)	WM-75CST-50	65	-----	----
Se (Selenium)	WM-75CST-51	44	-----	----
Si (Silicon)	WM-75CST-52	38	WM-75CST-52-5X	48
Ag (Silver)	WM-75CST-53	38	WM-75CST-53-5X	48
Na (Sodium)	WM-75CST-54	38	WM-75CST-54-5X	48
Sr (Strontium)	WM-75CST-55	38	-----	----
S (Sulfur)	WM-75CST-56	38	WM-75CST-56-5X	48
Tl (Thallium)	WM-75CST-60	44	-----	----
Sn (Tin)	WM-75CST-63	38	WM-75CST-63-5X	48
Ti (Titanium)	WM-75CST-64	38	WM-75CST-64-5X	48
V (Vanadium)	WM-75CST-67	38	WM-75CST-67-5X	48
Y (Yttrium)	WM-75CST-69	44	WM-75CST-69-5X	106
Zn (Zinc)	WM-75CST-70	38	WM-75CST-70-5X	48
Zn (Zirconium)	WM-75CST-71	38	WM-75CST-71-5X	48

Matrix Oil and Stabilizer

75 cSt Oil

MOSOL-75 \$ 23 / 500 mL

Stabilizer

WM-STAB \$ 95 / 1 x 50 g

Technical Note

Used to improve the stability or Organometallic Standards when diluting into solvents such as Kerosene.

Metals Additives

Metals Additives Standard

MA-900-100G	\$ 114 / 100 g
MA-900-200G	\$ 165 / 200 g
900 µg/g each in Hydrocarbon oil	
MA-1000-100G	\$ 149 / 100 g
MA-1000-200G	\$ 251 / 200 g
1000 µg/g each in Hydrocarbon oil	
MA-3000-100G	\$ 295 / 100 g
MA-3000-200G	\$ 471 / 200 g
3000 µg/g each in Hydrocarbon oil	
MA-5000-100G	\$ 424 / 100 g
MA-5000-200G	\$ 685 / 200 g
5000 µg/g each in Hydrocarbon oil	5 comps.

Ba (Barium) P (Phosphorous)
Ca (Calcium) Zn (Zinc)
Mg (Magnesium)





Wear Metals

AA, ICP, DCP & XRF Analysis

12 Wear Metal Multi-Element

Conc.	Unit	Cat. No.	Price
10 µg/g	100 g	WM-12-1X-100G	\$ 90
	200 g	WM-12-1X-200G	95
30 µg/g	100 g	WM-12-3X-100G	90
	200 g	WM-12-3X-200G	95
50 µg/g	100 g	WM-12-5X-100G	95
	200 g	WM-12-5X-200G	100
100 µg/g	100 g	WM-12-10X-100G	100
	200 g	WM-12-10X-200G	150
300 µg/g	100 g	WM-12-30X-100G	120
	200 g	WM-12-30X-200G	215
500 µg/g	100 g	WM-12-50X-100G	180
	200 g	WM-12-50X-200G	310
900 µg/g	100 g	WM-12-90X-100G	250
	200 g	WM-12-90X-200G	445
100 gram Set WM-12-100G-SET			\$ 825
set of above 7 x 100 g			
200 gram Set WM-12-200G-SET			\$ 1250
set of above 7 x 200 g			

Each Wear Metal Standard contains 12 elements listed below in hydrocarbon oil at the stated concentration.

Ag (Silver)	Fe (Iron)	Pb (Lead)
Al (Aluminum)	Mg (Magnesium)	Si (Silicon)
Cr (Chromium)	Na (Sodium)	Sn (Tin)
Cu (Copper)	Ni (Nickel)	Ti (Titanium)

21 Wear Metal Multi-Element

Conc.	Unit	Cat. No.	Price
10 µg/g	100 g	WM-21-1X-100G	\$ 95
	200 g	WM-21-1X-200G	100
30 µg/g	100 g	WM-21-3X-100G	95
	200 g	WM-21-3X-200G	100
50 µg/g	100 g	WM-21-5X-100G	100
	200 g	WM-21-5X-200G	105
100 µg/g	100 g	WM-21-10X-100G	105
	200 g	WM-21-10X-200G	160
300 µg/g	100 g	WM-21-30X-100G	170
	200 g	WM-21-30X-200G	310
500 µg/g	100 g	WM-21-50X-100G	245
	200 g	WM-21-50X-200G	445
900 µg/g	100 g	WM-21-90X-100G	380
	200 g	WM-21-90X-200G	675
100 gram Set WM-21-100G-SET			\$ 1050
set of above 7 x 100 g			
200 gram Set WM-21-200G-SET			\$ 1700
set of above 7 x 200 g			

Each Wear Metal Standard contains 21 elements listed below in hydrocarbon oil at the stated concentration.

Ag (Silver)	Cu (Copper)	P (Phosphorus)
Al (Aluminum)	Fe (Iron)	Pb (Lead)
B (Boron)	Mg (Magnesium)	Si (Silicon)
Ba (Barium)	Mn (Manganese)	Sn (Tin)
Ca (Calcium)	Mo (Molybdenum)	Ti (Titanium)
Cd (Cadmium)	Na (Sodium)	V (Vanadium)
Cr (Chromium)	Ni (Nickel)	Zn (Zinc)

22 Wear Metal Multi-Element

Conc.	Unit	Cat. No.	Price
10 µg/g	100 g	WM-22-1X-100G	\$ 115
	200 g	WM-22-1X-200G	120
30 µg/g	100 g	WM-22-3X-100G	115
	200 g	WM-22-3X-200G	120
50 µg/g	100 g	WM-22-5X-100G	120
	200 g	WM-22-5X-200G	125
100 µg/g	100 g	WM-22-10X-100G	125
	200 g	WM-22-10X-200G	145
300 µg/g	100 g	WM-22-30X-100G	190
	200 g	WM-22-30X-200G	340
500 µg/g	100 g	WM-22-50X-100G	275
	200 g	WM-22-50X-200G	485
900 µg/g	100 g	WM-22-90X-100G	420
	200 g	WM-22-90X-200G	725
100 gram Set WM-22-100G-SET			\$ 1225
set of above 7 x 100 g			
200 gram Set WM-22-200G-SET			\$ 1850
set of above 7 x 200 g			

Each Wear Metal Standard contains 22 elements listed below in hydrocarbon oil at the stated concentration.

Ag (Silver)	Fe (Iron)	P (Phosphorus)
Al (Aluminum)	K (Potassium)	Pb (Lead)
B (Boron)	Mg (Magnesium)	Si (Silicon)
Ba (Barium)	Mn (Manganese)	Sn (Tin)
Ca (Calcium)	Mo (Molybdenum)	Ti (Titanium)
Cd (Cadmium)	(Molybdenum)	V (Vanadium)
Cr (Chromium)	Na (Sodium)	Zn (Zinc)
Cu (Copper)	Ni (Nickel)	

23 Wear Metal Multi-Element

Conc.	Unit	Cat. No.	Price
10 µg/g	100 g	WM-23-1X-100G	\$ 135
	200 g	WM-23-1X-200G	140
30 µg/g	100 g	WM-23-3X-100G	135
	200 g	WM-23-3X-200G	140
50 µg/g	100 g	WM-23-5X-100G	140
	200 g	WM-23-5X-200G	145
100 µg/g	100 g	WM-23-10X-100G	145
	200 g	WM-23-10X-200G	165
300 µg/g	100 g	WM-23-30X-100G	210
	200 g	WM-23-30X-200G	395
500 µg/g	100 g	WM-23-50X-100G	305
	200 g	WM-23-50X-200G	525
900 µg/g	100 g	WM-23-90X-100G	495
	200 g	WM-23-90X-200G	765
100 gram Set WM-23-100G-SET			\$ 1400
set of above 7 x 100 g			
200 gram Set WM-23-200G-SET			\$ 2025
set of above 7 x 200 g			

Each Wear Metal Standard contains 23 elements listed below in hydrocarbon oil at the stated concentration.

Ag (Silver)	Fe (Iron)	Pb (Lead)
Al (Aluminum)	K (Potassium)	Sb (Antimony)
B (Boron)	Mg (Magnesium)	Si (Silicon)
Ba (Barium)	Mn (Manganese)	Sn (Tin)
Ca (Calcium)	Mo (Molybdenum)	Ti (Titanium)
Cd (Cadmium)	Na (Sodium)	V (Vanadium)
Cr (Chromium)	Ni (Nickel)	Zn (Zinc)
Cu (Copper)	P (Phosphorus)	



Wear Metals

Premium Sulfur-Free



- Highly Concentrated Liquid Organometallic Standards
- Stabilized

- Sulfur/Phosphorous free (< 1 ppm)
- Ready for Use

Organometallic Single Element Stock Standards

Sulfur free Element	@ 1000 µg/g Cat. No.	Price 50 mL	@ 5000 µg/g Cat. No.	Price 50 mL
Al (Aluminum)	WM-NMS-01	\$ 55	WM-NMS-01-5X	\$ 72
Sb (Antimony)	WM-NMS-02	55	WM-NMS-02-5X	72
As (Arsenic)	WM-NMS-03	55	WM-NMS-03-5X	72
Ba (Barium)	WM-NMS-04	55	WM-NMS-04-5X	72
Be (Beryllium)	WM-NMS-05	69	WM-NMS-05-5X	118
Cd (Cadmium)	WM-NMS-08	55	WM-NMS-08-5X	72
Ca (Calcium)	WM-NMS-09	55	WM-NMS-09-5X	72
Ce (Cerium)	WM-NMS-11	55	WM-NMS-11-5X	72
Cr (Chromium)	WM-NMS-13	44	WM-NMS-13-5X	58
Co (Cobalt)	WM-NMS-14	44	WM-NMS-14-5X	58
Cu (Copper)	WM-NMS-15	44	WM-NMS-15-5X	58
Ga (Gallium)	WM-NMS-20	72	WM-NMS-20-5X	142
Au (Gold)	WM-NMS-22	111	-----	----
Fe (Iron)	WM-NMS-27	55	WM-NMS-27-5X	72
Pb (Lead)	WM-NMS-29	55	WM-NMS-29-5X	72
Li (Lithium)	WM-NMS-30	72	WM-NMS-30-5X	124
Mg (Magnesium)	WM-NMS-32	55	WM-NMS-32-5X	72
Mn (Manganese)	WM-NMS-33	55	WM-NMS-33-5X	72
Hg (Mercury)	WM-NMS-34	62	WM-NMS-34-5X	110
Mo (Molybdenum)	WM-NMS-35	62	WM-NMS-35-5X	110
Ni (Nickel)	WM-NMS-37	55	WM-NMS-37-5X	72
P (Phosphorous)	WM-NMS-41	55	WM-NMS-41-5X	72
K (Potassium)	WM-NMS-43	55	WM-NMS-43-5X	72
Se (Selenium)	WM-NMS-51	55	WM-NMS-51-5X	72
Si (Silicon)	WM-NMS-52	72	WM-NMS-52-5X	124
Ag (Silver)	WM-NMS-53	72	WM-NMS-53-5X	124
Na (Sodium)	WM-NMS-54	55	WM-NMS-54-5X	72
Sr (Strontium)	WM-NMS-55	55	WM-NMS-55-5X	72
Tl (Thallium)	WM-NMS-60	55	WM-NMS-60-5X	72
Sn (Tin)	WM-NMS-63	55	WM-NMS-63-5X	72
Ti (Titanium)	WM-NMS-64	55	WM-NMS-64-5X	72
V (Vanadium)	WM-NMS-67	55	WM-NMS-67-5X	72
Y (Yttrium)	WM-NMS-69	60	WM-NMS-69-5X	105
Zn (Zinc)	WM-NMS-70	55	WM-NMS-70-5X	72
Zr (Zirconium)	WM-NMS-71	55	WM-NMS-71-5X	72

Stabilization Solutions

The solutions were specifically designed for chelating & solubilizing our line of Sulfur-Free Organometallic Standards. Contact Tech Service for additional information.

Premium Sulfur-Free
Sulfur below detection limits

Stabilizer Solution A

ASTM-P-0122-0.5 \$ 80 / 50 mL
ASTM-P-0122-1 \$ 120 / 100 mL

Stabilizer Solution B

ASTM-P-0123-0.5 \$ 80 / 50 mL
ASTM-P-0123-1 \$ 120 / 100 mL

Stabilizer Solution C

ASTM-P-0124-0.5 \$ 80 / 50 mL
ASTM-P-0124-1 \$ 120 / 100 mL

Stabilizer Solution D

ASTM-P-0125-0.5 \$ 80 / 50 mL
ASTM-P-0125-1 \$ 120 / 100 mL

Contains
No Metallic
Sulfonates

These highly concentrated stabilized solutions can be used for customer specific formulations of additive elements in lubricating oils, iron, nickel and vanadium in residual oil, and wear metals in oils. These organometallic solutions can also be used to prepare single element or multi-element standards for plasma emission (ICP or DCP), rotating disk (rotrode), or atomic absorption spectroscopy (AA). The starting materials are PURE REAGENTS and have been certified against NIST SRM's whenever available. **THEY DO NOT CONTAIN PHOSPHORUS OR SULFUR.**

Organometallic Single Element Concentrates

Element	Conc. (Wt. %)	Cat. No.	Price / 25 grams	Cat. No.	Price / 50 grams
Al (Aluminum)	3	WM-NMS-01-30X-25G	\$ 178	WM-NMS-01-30X-50G	\$ 261
Sb (Antimony)	2	WM-NMS-02-20X-25G	122	WM-NMS-02-20X-50G	183
Ba (Barium)	12.5	WM-NMS-04-125X-25G	540	WM-NMS-04-125X-50G	780
Cd (Cadmium)	10	WM-NMS-08-100X-25G	510	WM-NMS-08-100X-50G	710
Ca (Calcium)	5	WM-NMS-09-50X-25G	272	WM-NMS-09-50X-50G	422
Ce (Cerium)	5	WM-NMS-11-50X-25G	272	WM-NMS-11-50X-50G	422
Cr (Chromium)	3.5	WM-NMS-13-35X-25G	194	WM-NMS-13-35X-50G	299
Co (Cobalt)	7.5	WM-NMS-14-75X-25G	422	WM-NMS-14-75X-50G	577
Cu (Copper)	6	WM-NMS-15-60X-25G	344	WM-NMS-15-60X-50G	516
Fe (Iron)	4	WM-NMS-27-40X-25G	239	WM-NMS-27-40X-50G	361
Pb (Lead)	20	WM-NMS-29-200X-25G	900	WM-NMS-29-200X-50G	1260
Li (Lithium)	1.5	WM-NMS-30-15X-25G	155	WM-NMS-30-15X-50G	239
Mg (Magnesium422)	3	WM-NMS-32-30X-25G	180	WM-NMS-32-30X-50G	278
Mn (Manganese)	6	WM-NMS-33-60X-25G	333	WM-NMS-33-60X-50G	505
Mo (Molybdenum)	5	WM-NMS-35-50X-25G	272	WM-NMS-35-50X-50G	422
Ni (Nickel)	5	WM-NMS-37-50X-25G	272	WM-NMS-37-50X-50G	422
P (Phosphorus)	5	WM-NMS-41-50X-25G	272	WM-NMS-41-50X-50G	422
K (Potassium)	7.5	WM-NMS-43-75X-25G	422	WM-NMS-43-75X-50G	577
Pr (Praseodymium)	3	WM-NMS-44-30X-25G	175	WM-NMS-44-30X-50G	240
Se (Selenium)	3.5	WM-NMS-51-35X-25G	200	WM-NMS-51-35X-50G	270
Si (Silicon)	7.5	WM-NMS-52-75X-25G	383	WM-NMS-52-75X-50G	528
Na (Sodium)	2.5	WM-NMS-54-25X-25G	180	WM-NMS-54-25X-50G	278
Sr (Strontium)	10	WM-NMS-55-100X-25G	510	WM-NMS-55-100X-50G	710
Tl (Thallium)	5	WM-NMS-60-50X-25G	272	WM-NMS-60-50X-50G	422
Sn (Tin)	7.5	WM-NMS-63-75X-25G	422	WM-NMS-63-75X-50G	577
Ti (Titanium)	5	WM-NMS-64-50X-25G	272	WM-NMS-64-50X-50G	422
V (Vanadium)	4	WM-NMS-67-40X-25G	239	WM-NMS-67-40X-50G	361
Y (Yttrium)	2.5	WM-NMS-69-25X-25G	180	WM-NMS-69-25X-50G	278
Zn (Zinc)	6	WM-NMS-70-60X-25G	306	WM-NMS-70-60X-50G	461
Zr (Zirconium)	5	WM-NMS-71-50X-25G	272	WM-NMS-71-50X-50G	422

Technical Note

These standards are **sulfur free** (below detection limits) **organometallic standards** for X-ray Fluorescence (XRF), plasma emission (ICP or DCP), rotating disk (rotrode), or atomic absorption (AA). They are stabilized for blending together with other Analytes to prepare multi-element standards.



Wear Metals

Premium Sulfur-Free

11 Wear Metal Multi-Element

Conc.	Unit	Cat. No.	Price
10 µg/g	100 mL	WM-11-NMS-1X-1	\$ 130
30 µg/g	100 mL	WM-11-NMS-3X-1	130
50 µg/g	100 mL	WM-11-NMS-5X-1	130
100 µg/g	100 mL	WM-11-NMS-10X-1	140
300 µg/g	100 mL	WM-11-NMS-30X-1	165
500 µg/g	100 mL	WM-11-NMS-50X-1	245
900 µg/g	100 mL	WM-11-NMS-90X-1	325
100 mL Set WM-11-NMS-1-SET			\$ 1100
set of above 7 x 100 mL			

Each Wear Metal Standard contains 11 elements listed below in hydrocarbon oil at the stated concentration.

Al (Aluminum)	Mg (Magnesium)	Si (Silicon)
Cr (Chromium)	Na (Sodium)	Sn (Tin)
Cu (Copper)	Ni (Nickel)	Ti (Titanium)
Fe (Iron)	Pb (Lead)	

12 Wear Metal Multi-Element

Conc.	Unit	Cat. No.	Price
10 µg/g	100 mL	WM-12-NMS-1X-1	\$ 135
30 µg/g	100 mL	WM-12-NMS-3X-1	135
50 µg/g	100 mL	WM-12-NMS-5X-1	135
100 µg/g	100 mL	WM-12-NMS-10X-1	145
300 µg/g	100 mL	WM-12-NMS-30X-1	170
500 µg/g	100 mL	WM-12-NMS-50X-1	250
900 µg/g	100 mL	WM-12-NMS-90X-1	375
100 mL Set WM-12-NMS-1-SET			\$ 1175
set of above 7 x 100 mL			

Each Wear Metal Standard contains 12 elements listed below in hydrocarbon oil at the stated concentration.

Ag (Silver)	Fe (Iron)	Pb (Lead)
Al (Aluminum)	Mg (Magnesium)	Si (Silicon)
Cr (Chromium)	Na (Sodium)	Sn (Tin)
Cu (Copper)	Ni (Nickel)	Ti (Titanium)

Contains
No Metallic
Sulfonates

Premium
Sulfur-Free

Sulfur below
detection limits

20 Wear Metal Multi-Element

Conc.	Unit	Cat. No.	Price
10 µg/g	100 mL	WM-20-NMS-1X-1	\$ 150
30 µg/g	100 mL	WM-20-NMS-3X-1	150
50 µg/g	100 mL	WM-20-NMS-5X-1	150
100 µg/g	100 mL	WM-20-NMS-10X-1	170
300 µg/g	100 mL	WM-20-NMS-30X-1	230
500 µg/g	100 mL	WM-20-NMS-50X-1	350
900 µg/g	100 mL	WM-20-NMS-90X-1	500
100 mL Set WM-20-NMS-1-SET			\$ 1450
set of above 7 x 100 mL			

Each Wear Metal Standard contains 20 elements listed below in hydrocarbon oil at the stated concentration.

Al (Aluminum)	Fe (Iron)	Pb (Lead)
B (Boron)	Mg (Magnesium)	Si (Silicon)
Ba (Barium)	Mn (Manganese)	Sn (Tin)
Ca (Calcium)	Mo (Molybdenum)	Ti (Titanium)
Cd (Cadmium)	Na (Sodium)	V (Vanadium)
Cr (Chromium)	Ni (Nickel)	Zn (Zinc)
Cu (Copper)	P (Phosphorus)	

21 Wear Metal Multi-Element

Conc.	Unit	Cat. No.	Price
10 µg/g	100 mL	WM-21-NMS-1X-1	\$ 160
30 µg/g	100 mL	WM-21-NMS-3X-1	160
50 µg/g	100 mL	WM-21-NMS-5X-1	160
100 µg/g	100 mL	WM-21-NMS-10X-1	180
300 µg/g	100 mL	WM-21-NMS-30X-1	240
500 µg/g	100 mL	WM-21-NMS-50X-1	350
900 µg/g	100 mL	WM-21-NMS-90X-1	550
100 mL Set WM-21-NMS-1-SET			\$ 1550
set of above 7 x 100 mL			

Each Wear Metal Standard contains 21 elements listed below in hydrocarbon oil at the stated concentration.

Ag (Silver)	Cu (Copper)	P (Phosphorus)
Al (Aluminum)	Fe (Iron)	Pb (Lead)
B (Boron)	Mg (Magnesium)	Si (Silicon)
Ba (Barium)	Mn (Manganese)	Sn (Tin)
Ca (Calcium)	Mo (Molybdenum)	Ti (Titanium)
Cd (Cadmium)	Na (Sodium)	V (Vanadium)
Cr (Chromium)	Ni (Nickel)	Zn (Zinc)

Recommended
Internal Standard

Organometallic (Internal Standard) Sulfur free

	Conc.	Cat. No.	Price / 50 mL
Cobalt	1000 µg/g	WM-NMS-14	\$ 44
	5000 µg/g	WM-NMS-14-5X	\$ 58

Wear Metals

AA, ICP, DCP & XRF Analysis



Sulfur and Metals in Oil

Sulfur and Metals in Mineral Oil

ASTM-P-0100-SET \$ 1675 / 12 x 100 mL				
Cat. No.	Sulfur (Wt. %)	Nickel (µg/g)	Vanadium (µg/g)	100 mL Price
ASTM-P-0100-01	0.00	0	0	\$ 200
ASTM-P-0100-02	0.50	10	500	200
ASTM-P-0100-03	1.00	100	25	200
ASTM-P-0100-04	1.50	80	250	200
ASTM-P-0100-05	2.00	40	100	200
ASTM-P-0100-06	2.50	5	400	200
ASTM-P-0100-07	3.00	60	300	200
ASTM-P-0100-08	3.50	0	200	200
ASTM-P-0100-09	4.00	100	0	200
ASTM-P-0100-10	4.50	50	250	200
ASTM-P-0100-11	5.00	20	500	200
ASTM-P-0100-12	5.50	100	50	200

Sulfur and Metals in Residual Fuel Oil

ASTM-P-0101-SET \$ 1965 / 12 x 100 mL				
Cat. No.	Sulfur (Wt. %)	Nickel (µg/g)	Vanadium (µg/g)	100 mL Price
ASTM-P-0101-01	0.00	0	0	\$ 200
ASTM-P-0101-02	0.50	10	500	200
ASTM-P-0101-03	1.00	100	25	200
ASTM-P-0101-04	1.50	80	250	200
ASTM-P-0101-05	2.00	40	100	200
ASTM-P-0101-06	2.50	5	400	200
ASTM-P-0101-07	3.00	60	300	200
ASTM-P-0101-08	3.50	0	200	200
ASTM-P-0101-09	4.00	100	0	200
ASTM-P-0101-10	4.50	50	250	200
ASTM-P-0101-11	5.00	20	500	200
ASTM-P-0101-12	5.50	100	50	200

Test Method A - ICP with an Organic Solvent Specimen Solution

Sulfur and Metals in Mineral Oil

ASTM-P-0102-SET \$ 1960 / 12 x 100 mL					Designed for ASTM D5708
Cat. No.	Sulfur (Wt. %)	Iron (µg/g)	Nickel (µg/g)	Vanadium (µg/g)	100 mL Price
ASTM-P-0102-01	0.00	0	0	0	\$ 225
ASTM-P-0102-02	0.50	300	10	500	225
ASTM-P-0102-03	1.00	500	100	25	225
ASTM-P-0102-04	-----	100	80	250	225
ASTM-P-0102-05	2.00	200	40	100	225
ASTM-P-0102-06	2.50	400	5	400	225
ASTM-P-0102-07	3.00	0	60	300	225
ASTM-P-0102-08	3.50	500	0	200	225
ASTM-P-0102-09	-----	100	100	0	225
ASTM-P-0102-10	4.50	300	50	250	225
ASTM-P-0102-11	5.00	200	20	500	225
ASTM-P-0102-12	5.50	50	100	50	225

Sulfur and Metals in Residual Fuel Oil

ASTM-P-0103-SET \$ 2220 / 12 x 100 mL					Designed for ASTM D5708
Cat. No.	Sulfur (Wt. %)	Iron (µg/g)	Nickel (µg/g)	Vanadium (µg/g)	100 mL Price
ASTM-P-0103-01	0.00	0	0	0	\$ 225
ASTM-P-0103-02	0.50	300	10	500	225
ASTM-P-0103-03	1.00	500	100	25	225
ASTM-P-0103-04	-----	100	80	250	225
ASTM-P-0103-05	2.00	200	40	100	225
ASTM-P-0103-06	2.50	400	5	400	225
ASTM-P-0103-07	3.00	0	60	300	225
ASTM-P-0103-08	3.50	500	0	200	225
ASTM-P-0103-09	-----	100	100	0	225
ASTM-P-0103-10	4.50	300	50	250	225
ASTM-P-0103-11	5.00	200	20	500	225
ASTM-P-0103-12	5.50	50	100	50	225

After Acid Decomposition of Sample

Stock Multi-Element in Mineral Oil

D-5708-A-10X \$ 150 / 100 mL
100 µg/g in 20 cSt mineral oil 3 comps.
Iron Vanadium
Nickel

Working Level Multi-Element Aqueous Standard

D-5708-B-5 ▲ \$ 105 / 500 mL
10 µg/mL each in 2-5% HNO₃ 3 comps.
Iron Vanadium
Nickel

Stock Multi-Element Aqueous Standard

D-5863-95A-10X-1 ▲ \$ 75 / 1 x 100 mL
2-5% HNO₃ 3 comps.
Iron 100 Vanadium 200
Nickel 200

Nitric Acid Blank

CLP-BLN-5 ▲ \$ 30 / 500 mL
CLP-BLN-L-VAP ▲ \$ 45 / 1 L (2 x 500 mL)
5% HNO₃ in ASTM Type I Water

Stock Multi-Element Aqueous Standard

D-5708-B-10X-1 ▲ \$ 60 / 100 mL
D-5708-B-10X-5 ▲ \$ 115 / 500 mL
100 µg/mL each in 2-5% HNO₃ 3 comps.
Iron Vanadium
Nickel

Stock Multi-Element Standard in Mineral Oil

D-5863-95B-10X \$ 160 / 1 x 100 g
At stated conc. (µg/g) in 20 cst Mineral Oil 3 comps.
Sodium 50 Vanadium 150
Nickel 200

ISO/CD 14597 Vanadium and Nickel Standards with Manganese (Internal Standard)

Vanadium Standards - Low Range for ISO/CD 14597 with 0.05% Manganese Internal Standard in Xylene-Mineral Oil

ASTM-P-0104-SET \$ 1050 / 9 x 100 mL		
Cat. No.	Vanadium Conc. (Wt.%)	Price 100 mL
ASTM-P-0104-01	0.0005	\$ 150
ASTM-P-0104-02	0.0025	150
ASTM-P-0104-03	0.0050	150
ASTM-P-0104-04	0.0075	150
ASTM-P-0104-05	0.0100	150
ASTM-P-0104-06	0.0125	150
ASTM-P-0104-07	0.0150	150
ASTM-P-0104-08	0.0175	150
ASTM-P-0104-09	0.0200	150

Vanadium Standards - High Range for ISO/CD 14597 with 0.05% Manganese Internal Standard in Xylene-Mineral Oil

ASTM-P-0105-SET \$ 825 / 7 x 100 mL		
Cat. No.	Vanadium Conc. (Wt.%)	Price 100 mL
ASTM-P-0105-01	0.0000	\$ 135
ASTM-P-0105-02	0.0300	135
ASTM-P-0105-03	0.0400	135
ASTM-P-0105-04	0.0500	135
ASTM-P-0105-05	0.0600	135
ASTM-P-0105-06	0.0800	135
ASTM-P-0105-07	0.1000	135

Nickel Standards for ISO/CD 14597 with 0.05% Manganese Internal Standard in Xylene-Mineral Oil

ASTM-P-0106-SET \$ 825 / 7 x 100 mL		
Cat. No.	Nickel Conc. (Wt.%)	Price 100 mL
ASTM-P-0106-01	0.0000	\$ 135
ASTM-P-0106-02	0.0005	135
ASTM-P-0106-03	0.0010	135
ASTM-P-0106-04	0.0025	135
ASTM-P-0106-05	0.0050	135
ASTM-P-0106-06	0.0075	135
ASTM-P-0106-07	0.0100	135

Internal Standard

ASTM-P-0107-5 \$ 235 / 500 mL
Manganese @ 0.05 Wt. % in Xylene-Mineral Oil

▲ Hazardous fee required.

Wear Metals

AA, ICP, DCP & XRF Analysis



Lubricating Oil Standards (Continued)

ASTM-P-0114-SET \$ 2080 / 17 x 100 mL

Designed for ASTM D6481				
Cat. No.	Ca	P	S	Zn
Nominal Value	(Wt.%)	(Wt.%)	(Wt.%)	(Wt.%)
ASTM-P-0114-01	0.005	0.005	0.050	0.050
ASTM-P-0114-02	0.600	0.000	0.000	0.000
ASTM-P-0114-03	0.000	0.300	0.000	0.000
ASTM-P-0114-04	1.000	0.000	1.000	0.000
ASTM-P-0114-05	0.000	0.000	0.000	0.300
ASTM-P-0114-06	0.005	0.250	0.800	0.300
ASTM-P-0114-07	0.500	0.150	0.500	0.150
ASTM-P-0114-08	0.010	0.200	0.100	0.250
ASTM-P-0114-09	0.050	0.010	0.400	0.075
ASTM-P-0114-10	0.100	0.150	0.200	0.200
ASTM-P-0114-11	0.200	0.200	0.800	0.100
ASTM-P-0114-12	0.400	0.005	0.800	0.300
ASTM-P-0114-13	0.600	0.100	0.500	0.050
ASTM-P-0114-14	0.800	0.010	0.050	0.100
ASTM-P-0114-15	1.000	0.300	1.000	0.150
ASTM-P-0114-16	0.400	0.050	0.600	0.250
ASTM-P-0114-17	0.000	0.000	0.000	0.000

ASTM-P-0115-SET \$ 2485 / 17 x 100 mL

Cat. No.	Ca	P	S	Zn	Mg
Nominal Value	(Wt.%)	(Wt.%)	(Wt.%)	(Wt.%)	(Wt.%)
ASTM-P-0115-01	0.005	0.005	0.050	0.050	0.100
ASTM-P-0115-02	0.600	0.000	0.000	0.000	0.150
ASTM-P-0115-03	0.000	0.300	0.000	0.000	0.350
ASTM-P-0115-04	1.000	0.000	1.000	0.000	0.225
ASTM-P-0115-05	0.000	0.000	0.000	0.300	0.450
ASTM-P-0115-06	0.005	0.250	0.800	0.300	0.500
ASTM-P-0115-07	0.500	0.150	0.500	0.150	0.325
ASTM-P-0115-08	0.010	0.200	0.100	0.250	0.250
ASTM-P-0115-09	0.050	0.010	0.400	0.075	0.050
ASTM-P-0115-10	0.100	0.150	0.200	0.200	0.400
ASTM-P-0115-11	0.200	0.200	0.800	0.100	0.300
ASTM-P-0115-12	0.400	0.005	0.800	0.300	0.200
ASTM-P-0115-13	0.600	0.100	0.500	0.050	0.375
ASTM-P-0115-14	0.800	0.010	0.050	0.100	0.175
ASTM-P-0115-15	1.000	0.300	1.000	0.150	0.425
ASTM-P-0115-16	0.400	0.050	0.600	0.250	0.275
ASTM-P-0115-17	0.000	0.000	0.000	0.000	0.000

ASTM-P-0116-SET \$ 2600 / 11 x 100 mL

Designed for ASTM D6481				
Cat. No.	Ca	P	S	Zn
Nominal Value	(Wt.%)	(Wt.%)	(Wt.%)	(Wt.%)
ASTM-P-0116-01	0.500	1.000	0.500	0.500
ASTM-P-0116-02	3.000	1.000	3.000	2.000
ASTM-P-0116-03	2.000	1.250	1.000	1.500
ASTM-P-0116-04	5.000	1.500	0.500	1.200
ASTM-P-0116-05	4.000	0.500	1.500	0.750
ASTM-P-0116-06	2.500	0.750	4.000	1.000
ASTM-P-0116-07	4.000	0.500	2.000	1.250
ASTM-P-0116-08	0.500	2.000	5.000	1.000
ASTM-P-0116-09	1.000	0.750	2.000	1.500
ASTM-P-0116-10	2.500	1.200	3.000	0.500
ASTM-P-0116-11	0.000	0.000	0.000	0.000

ASTM-P-0117-SET \$ 2250 / 10 x 100 mL

Designed for ASTM D6443							
Cat. No.	Ca	Cl	Cu	Mg	P	S	Zn
Nominal Value	(Wt.%)	(Wt.%)	(Wt.%)	(Wt.%)	(Wt.%)	(Wt.%)	(Wt.%)
ASTM-P-0117-01	0.020	0.030	0.010	0.200	0.250	1.000	0.020
ASTM-P-0117-02	0.020	0.020	0.050	0.200	0.020	0.020	0.250
ASTM-P-0117-03	0.020	0.200	0.010	0.040	0.250	0.150	0.250
ASTM-P-0117-04	0.020	0.200	0.050	0.040	0.020	1.000	0.020
ASTM-P-0117-05	0.400	0.020	0.010	0.040	0.020	1.000	0.250
ASTM-P-0117-06	0.400	0.020	0.050	0.040	0.250	0.020	0.020
ASTM-P-0117-07	0.400	0.200	0.010	0.200	0.020	0.020	0.050
ASTM-P-0117-08	0.400	0.200	0.050	0.200	0.250	1.000	0.250
ASTM-P-0117-09	0.200	0.100	0.025	0.080	0.150	0.500	0.100
ASTM-P-0117-10	0.000	0.000	0.000	0.000	0.000	0.000	0.000

ASTM-P-0118-SET \$ 2540 / 10 x 100 mL

Designed for ASTM D4628, D4927, D4951, D6443								
Cat. No.	Ba	Ca	Cl	Cu	Mg	P	S	Zn
Nominal Value	(Wt.%)	(Wt.%)	(Wt.%)	(Wt.%)	(Wt.%)	(Wt.%)	(Wt.%)	(Wt.%)
ASTM-P-0118-01	0.020	0.020	0.030	0.010	0.200	0.250	1.000	0.020
ASTM-P-0118-02	0.250	0.020	0.020	0.050	0.200	0.020	0.020	0.250
ASTM-P-0118-03	0.020	0.020	0.200	0.010	0.040	0.250	0.150	0.250
ASTM-P-0118-04	0.250	0.020	0.200	0.050	0.040	0.020	1.000	0.020
ASTM-P-0118-05	0.020	0.400	0.020	0.010	0.040	0.020	1.000	0.250
ASTM-P-0118-06	0.250	0.400	0.020	0.050	0.040	0.250	0.020	0.020
ASTM-P-0118-07	0.020	0.400	0.200	0.010	0.200	0.020	0.020	0.050
ASTM-P-0118-08	0.250	0.400	0.200	0.050	0.200	0.250	1.000	0.250
ASTM-P-0118-09	0.130	0.200	0.100	0.025	0.080	0.150	0.500	0.100
ASTM-P-0118-10	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Wear Metals



Wear Metals

AA, ICP, DCP & XRF Analysis

Lubricating Oil Standards (Continued)

ASTM-P-0119-SET

\$ 3100 / 22 x 100 mL

Designed for ASTM D4628, D4927, D4951, D6443

Cat. No.	Ca (Wt.%)	Cl (Wt.%)	Cu (Wt.%)	Mg (Wt.%)	P (Wt.%)	S (Wt.%)	Zn (Wt.%)
ASTM-P-0119-01	0.300	0.080	0.030	0.060	0.060	0.275	0.060
ASTM-P-0119-02	0.250	0.100	0.000	0.010	0.150	0.000	0.150
ASTM-P-0119-03	0.500	0.000	0.035	0.160	0.150	0.000	0.020
ASTM-P-0119-04	0.350	0.010	0.000	0.120	0.080	0.200	0.000
ASTM-P-0119-05	0.110	0.000	0.015	0.100	0.100	0.300	0.050
ASTM-P-0119-06	0.200	0.100	0.000	0.200	0.050	0.250	0.150
ASTM-P-0119-07	0.000	0.050	0.025	0.000	0.000	0.450	0.020
ASTM-P-0119-08	0.150	0.030	0.000	0.100	0.030	0.400	0.040
ASTM-P-0119-09	0.250	0.150	0.010	0.160	0.000	0.350	0.080
ASTM-P-0119-10	0.110	0.150	0.040	0.005	0.030	0.750	0.150
ASTM-P-0119-11	0.260	0.050	0.000	0.000	0.000	0.750	0.000
ASTM-P-0119-12	0.200	0.000	0.005	0.140	0.080	0.500	0.080
ASTM-P-0119-13	0.000	0.000	0.005	0.020	0.020	0.200	0.020
ASTM-P-0119-14	0.070	0.150	0.020	0.080	0.140	0.650	0.150
ASTM-P-0119-15	0.050	0.000	0.000	0.000	0.150	0.000	0.000
ASTM-P-0119-16	0.400	0.000	0.001	0.080	0.000	0.500	0.020
ASTM-P-0119-17	0.180	0.020	0.020	0.000	0.020	0.600	0.060
ASTM-P-0119-18	0.400	0.010	0.001	0.010	0.020	0.000	0.000
ASTM-P-0119-19	0.010	0.020	0.040	0.010	0.020	0.200	0.100
ASTM-P-0119-20	0.050	0.005	0.050	0.000	0.008	0.000	0.120
ASTM-P-0119-21	0.200	0.050	0.020	0.080	0.050	0.275	0.050
ASTM-P-0119-22	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Standards of Interest

Concentration for the sets on pages 342-344 are targets. Actual production lots may vary.

ASTM-P-0120-SET

\$ 3350 / 23 x 100 mL

Cat. No.	Ba (Wt.%)	Ca (Wt.%)	Cl (Wt.%)	Cu (Wt.%)	Mg (Wt.%)	P (Wt.%)	S (Wt.%)	Zn (Wt.%)
ASTM-P-0120-01	0.100	0.300	0.080	0.030	0.060	0.060	0.275	0.060
ASTM-P-0120-02	0.175	0.250	0.100	0.000	0.010	0.150	0.000	0.150
ASTM-P-0120-03	0.040	0.500	0.000	0.035	0.160	0.150	0.000	0.020
ASTM-P-0120-04	0.020	0.350	0.010	0.000	0.120	0.080	0.200	0.000
ASTM-P-0120-05	0.150	0.110	0.000	0.015	0.100	0.100	0.300	0.050
ASTM-P-0120-06	0.000	0.200	0.100	0.000	0.200	0.050	0.250	0.150
ASTM-P-0120-07	0.200	0.000	0.050	0.025	0.000	0.000	0.450	0.020
ASTM-P-0120-08	0.000	0.150	0.030	0.000	0.100	0.030	0.400	0.040
ASTM-P-0120-09	0.000	0.250	0.150	0.010	0.160	0.000	0.350	0.080
ASTM-P-0120-10	0.000	0.110	0.150	0.040	0.005	0.030	0.750	0.150
ASTM-P-0120-11	0.100	0.260	0.050	0.000	0.000	0.000	0.750	0.000
ASTM-P-0120-12	0.050	0.200	0.000	0.005	0.140	0.080	0.500	0.080
ASTM-P-0120-13	0.000	0.000	0.000	0.005	0.020	0.020	0.200	0.020
ASTM-P-0120-14	0.080	0.070	0.150	0.020	0.080	0.140	0.650	0.150
ASTM-P-0120-15	0.010	0.050	0.000	0.000	0.000	0.150	0.000	0.000
ASTM-P-0120-16	0.000	0.400	0.000	0.001	0.080	0.000	0.500	0.020
ASTM-P-0120-17	0.000	0.180	0.020	0.020	0.000	0.020	0.600	0.060
ASTM-P-0120-18	0.000	0.400	0.010	0.001	0.010	0.020	0.000	0.000
ASTM-P-0120-19	0.150	0.010	0.020	0.040	0.010	0.020	0.200	0.100
ASTM-P-0120-20	0.005	0.050	0.005	0.050	0.000	0.008	0.000	0.120
ASTM-P-0120-21	0.100	0.200	0.050	0.020	0.080	0.050	0.275	0.050
ASTM-P-0120-22	0.120	0.200	0.000	0.000	0.000	0.000	0.750	0.000
ASTM-P-0120-23	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Metal Working Fluids

ASTM-P-0121-SET

\$ 1560 / 13 x 100 mL

Cat. No.	Cl (Wt.%)	P (Wt.%)	S (Wt.%)
ASTM-P-0121-01	0.000	0.000	0.000
ASTM-P-0121-02	0.750	0.025	0.500
ASTM-P-0121-03	0.050	0.100	3.000
ASTM-P-0121-04	1.000	0.500	2.500
ASTM-P-0121-05	0.100	0.005	2.000
ASTM-P-0121-06	1.500	0.200	1.000
ASTM-P-0121-07	2.000	0.005	3.000
ASTM-P-0121-08	1.000	0.050	0.100
ASTM-P-0121-09	0.500	0.400	0.000
ASTM-P-0121-10	2.000	0.200	1.500
ASTM-P-0121-11	0.000	0.500	1.500
ASTM-P-0121-12	1.250	0.010	0.050
ASTM-P-0121-13	0.050	0.300	0.050

Stabilization Solutions

The solutions were specifically designed for chelating & solubilizing our line of Sulfur-Free Organometallic Standards. Contact Tech Service for additional information.

Stabilizer Solution A

ASTM-P-0122-0.5 \$ 80 / 50 mL
ASTM-P-0122-1 \$ 120 / 100 mL

Stabilizer Solution C

ASTM-P-0124-0.5 \$ 80 / 50 mL
ASTM-P-0124-1 \$ 120 / 100 mL

Stabilizer Solution B

ASTM-P-0123-0.5 \$ 80 / 50 mL
ASTM-P-0123-1 \$ 120 / 100 mL

Stabilizer Solution D

ASTM-P-0125-0.5 \$ 80 / 50 mL
ASTM-P-0125-1 \$ 120 / 100 mL